

Probabilistic Robotics

Bayes Filter Implementations

Gaussian filters

Bayes Filter Reminder

- Prediction

$$\overline{bel}(x_t) = \int p(x_t | u_t, x_{t-1}) bel(x_{t-1}) dx_{t-1}$$

- Correction


$$bel(x_t) = \eta p(z_t | x_t) \overline{bel}(x_t)$$

Gaussians

$p(x) \sim N(\mu, \sigma^2)$:

$$p(x) = \frac{1}{\sqrt{2\pi}\sigma} e^{-\frac{1}{2}\frac{(x-\mu)^2}{\sigma^2}}$$


Univariate

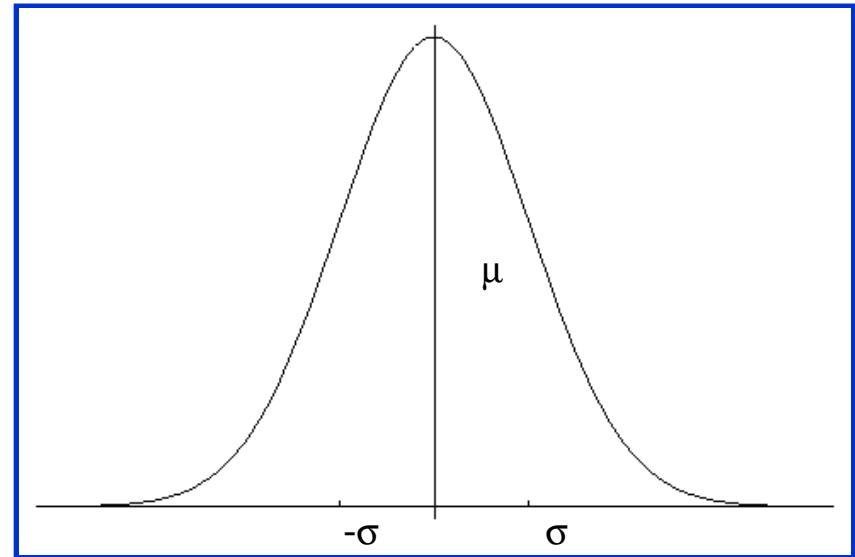

$p(\mathbf{x}) \sim N(\boldsymbol{\mu}, \boldsymbol{\Sigma})$:

$$p(\mathbf{x}) = \frac{1}{(2\pi)^{d/2} |\boldsymbol{\Sigma}|^{1/2}} e^{-\frac{1}{2} (\mathbf{x}-\boldsymbol{\mu})^t \boldsymbol{\Sigma}^{-1} (\mathbf{x}-\boldsymbol{\mu})}$$

Multivariate

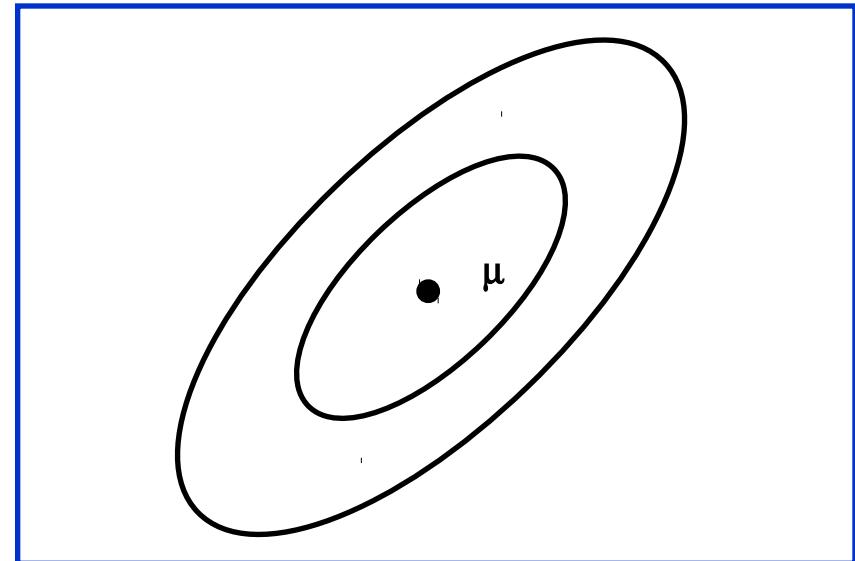

Properties of Gaussians

$$\left. \begin{array}{l} X \sim N(\mu, \sigma^2) \\ Y = aX + b \end{array} \right\} \Rightarrow Y \sim N(a\mu + b, a^2\sigma^2)$$

$$\left. \begin{array}{l} X_1 \sim N(\mu_1, \sigma_1^2) \\ X_2 \sim N(\mu_2, \sigma_2^2) \end{array} \right\} \Rightarrow p(X_1) \cdot p(X_2) \sim N\left(\frac{\sigma_2^2}{\sigma_1^2 + \sigma_2^2} \mu_1 + \frac{\sigma_1^2}{\sigma_1^2 + \sigma_2^2} \mu_2, \frac{1}{\sigma_1^{-2} + \sigma_2^{-2}} \right)$$

Multivariate Gaussians

$$\left. \begin{array}{l} X \sim N(\mu, \Sigma) \\ Y = AX + B \end{array} \right\} \Rightarrow Y \sim N(A\mu + B, A\Sigma A^T)$$

$$\left. \begin{array}{l} X_1 \sim N(\mu_1, \Sigma_1) \\ X_2 \sim N(\mu_2, \Sigma_2) \end{array} \right\} \Rightarrow p(X_1) \cdot p(X_2) \sim N\left(\frac{\Sigma_2}{\Sigma_1 + \Sigma_2} \mu_1 + \frac{\Sigma_1}{\Sigma_1 + \Sigma_2} \mu_2, \frac{1}{\Sigma_1^{-1} + \Sigma_2^{-1}} \right)$$

Discrete Kalman Filter

Estimates the state x of a discrete-time controlled process that is governed by the linear stochastic difference equation

$$x_t = A_t x_{t-1} + B_t u_t + \varepsilon_t$$




with a measurement

$$z_t = C_t x_t + \delta_t$$

Components of a Kalman Filter

- A_t Matrix ($n \times n$) that describes how the state evolves from t to $t-1$ without controls or noise.
- B_t Matrix ($n \times l$) that describes how the control u_t changes the state from t to $t-1$.
- C_t Matrix ($k \times n$) that describes how to map the state x_t to an observation z_t .
- ε_t Random variables representing the process and measurement noise that are assumed to be independent and normally distributed with covariance R_t and Q_t respectively.
- δ_t


Kalman Filter Updates in 1D

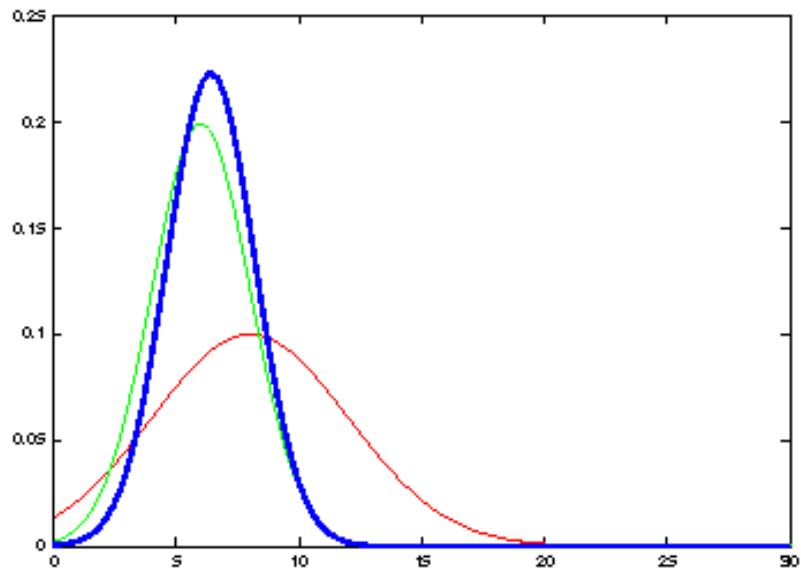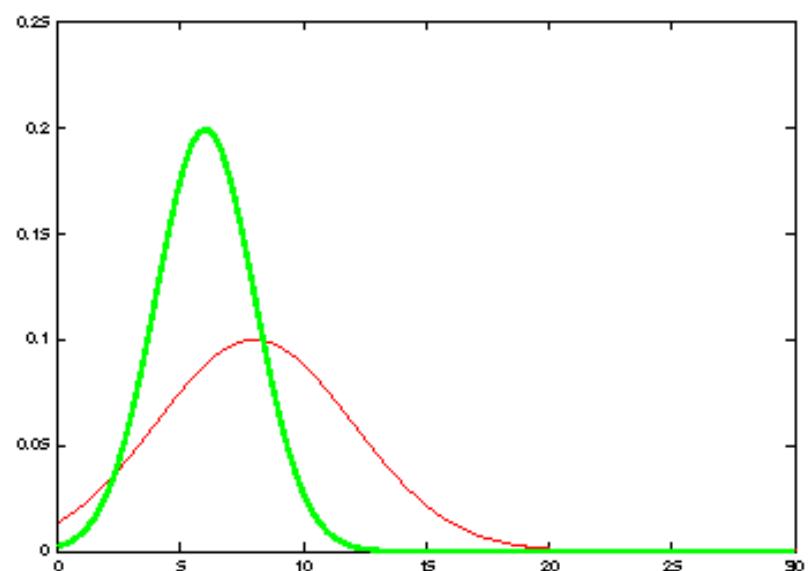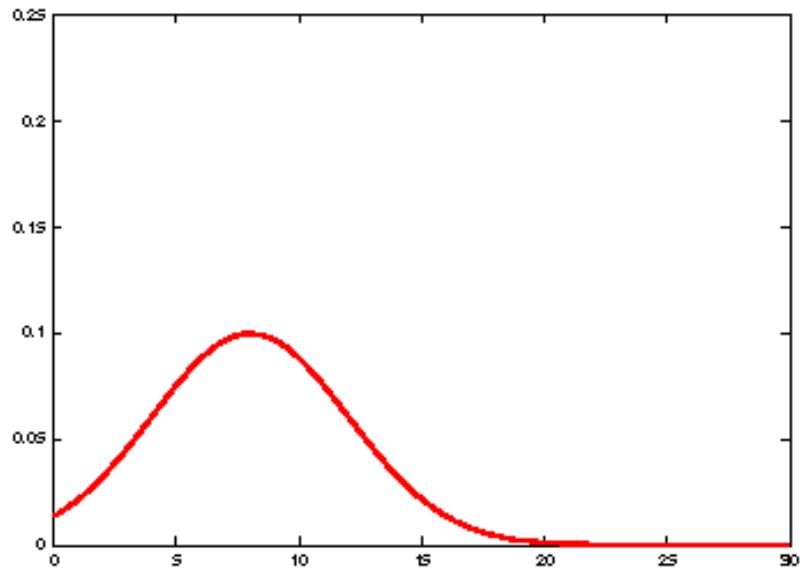

Kalman Filter Updates in 1D

$$bel(x_t) = \begin{cases} \mu_t = \bar{\mu}_t + K_t(z_t - \bar{\mu}_t) \\ \sigma_t^2 = (1 - K_t)\bar{\sigma}_t^2 \end{cases} \quad \text{with } K_t = \frac{\bar{\sigma}_t^2}{\bar{\sigma}_t^2 + \bar{\sigma}_{obs,t}^2}$$



$$bel(x_t) = \begin{cases} \mu_t = \bar{\mu}_t + K_t(z_t - C_t \bar{\mu}_t) \\ \Sigma_t = (I - K_t C_t) \bar{\Sigma}_t \end{cases} \quad \text{with } K_t = \bar{\Sigma}_t C_t^T (C_t \bar{\Sigma}_t C_t^T + Q_t)^{-1}$$

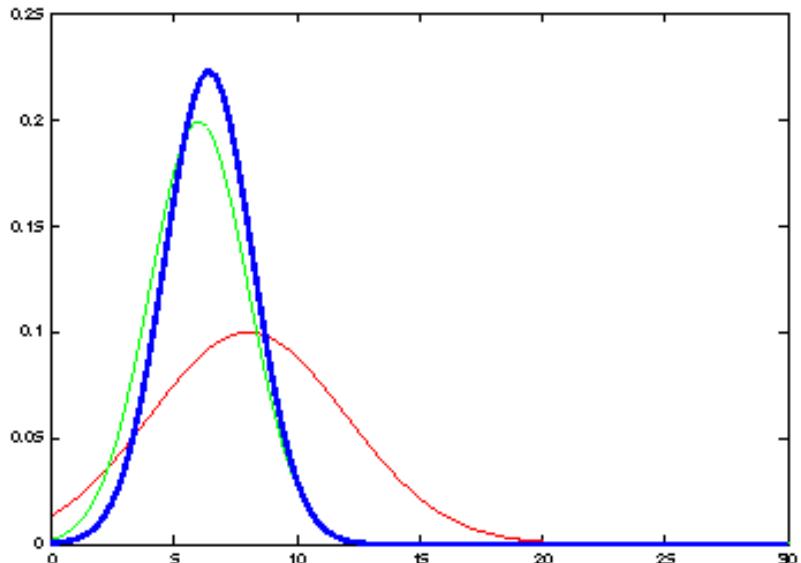





Kalman Filter Updates in 1D

$$\overline{bel}(x_t) = \begin{cases} \bar{\mu}_t = a_t \mu_{t-1} + b_t u_t \\ \bar{\sigma}_t^2 = a_t^2 \sigma_t^2 + \sigma_{act,t}^2 \end{cases}$$

$$\overline{bel}(x_t) = \begin{cases} \bar{\mu}_t = A_t \mu_{t-1} + B_t u_t \\ \bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + R_t \end{cases}$$

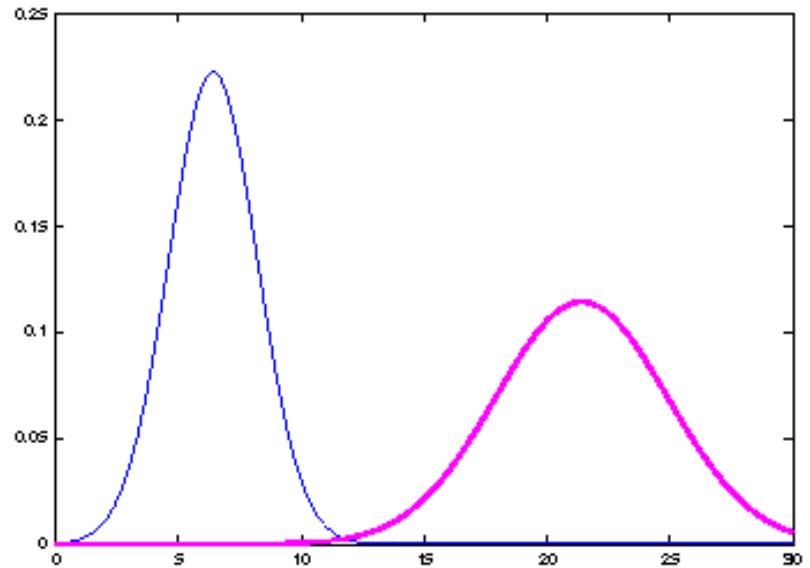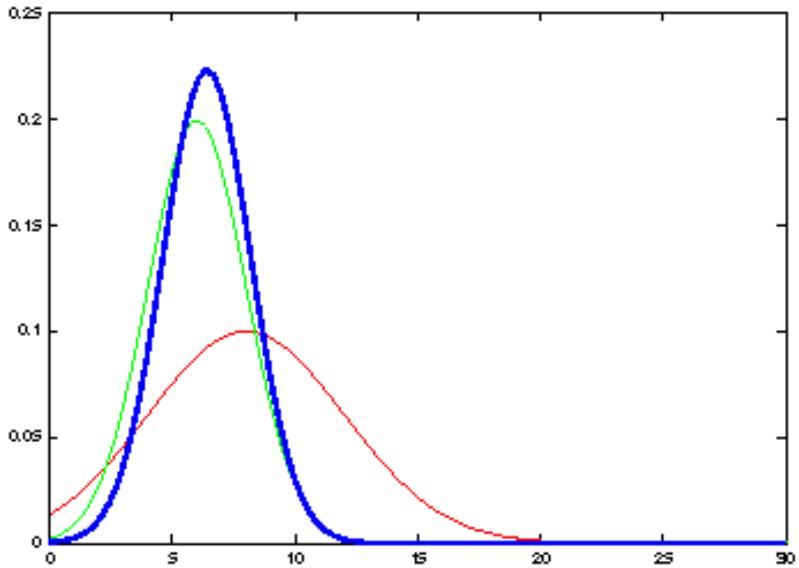

Kalman Filter Updates

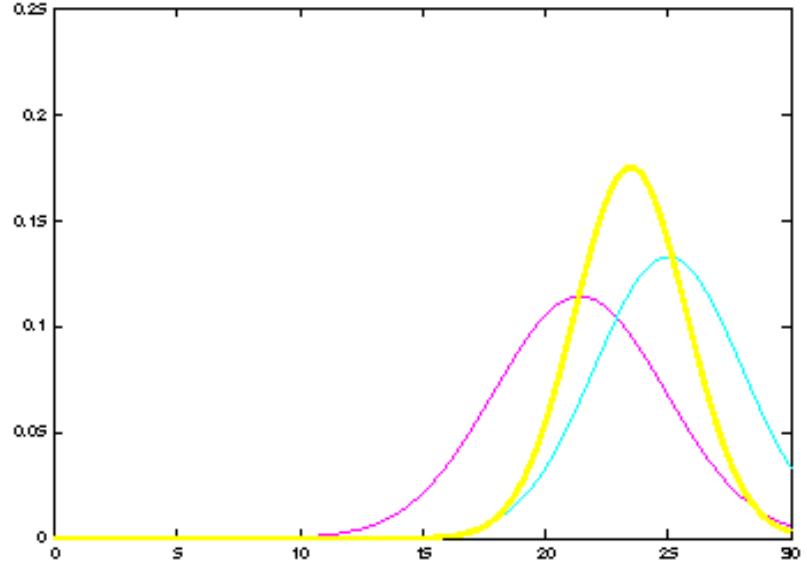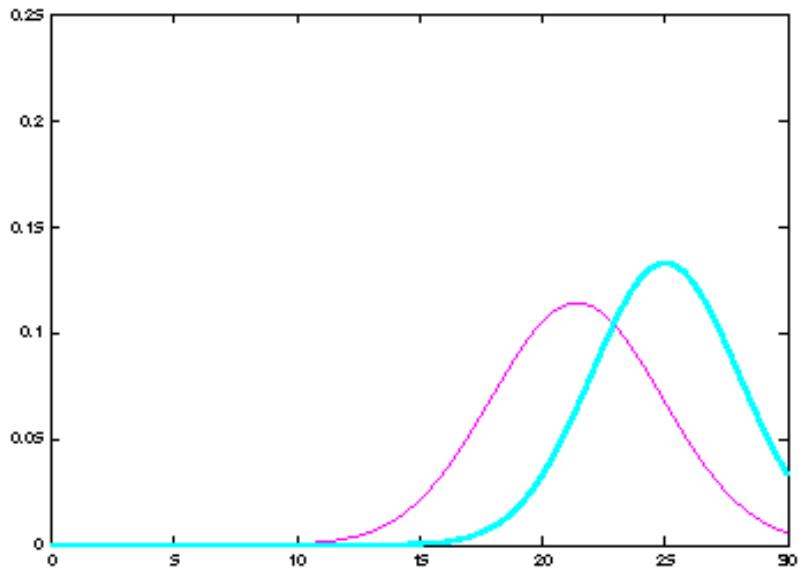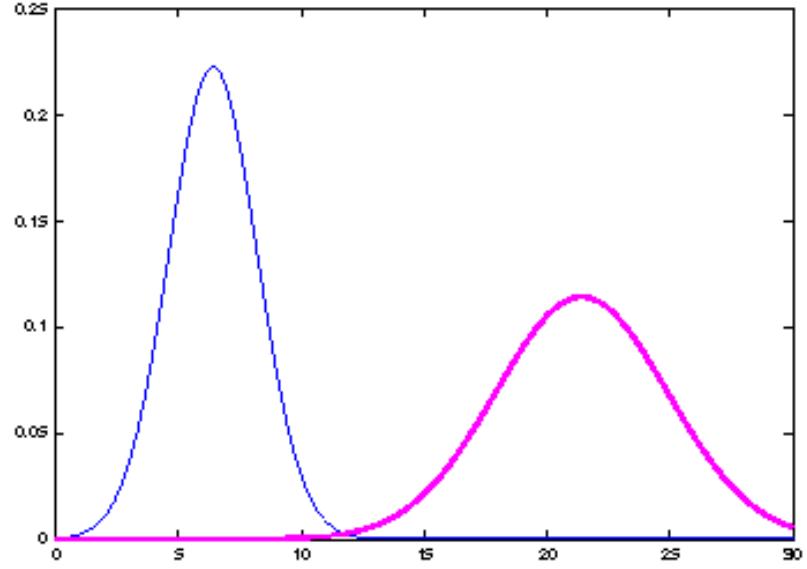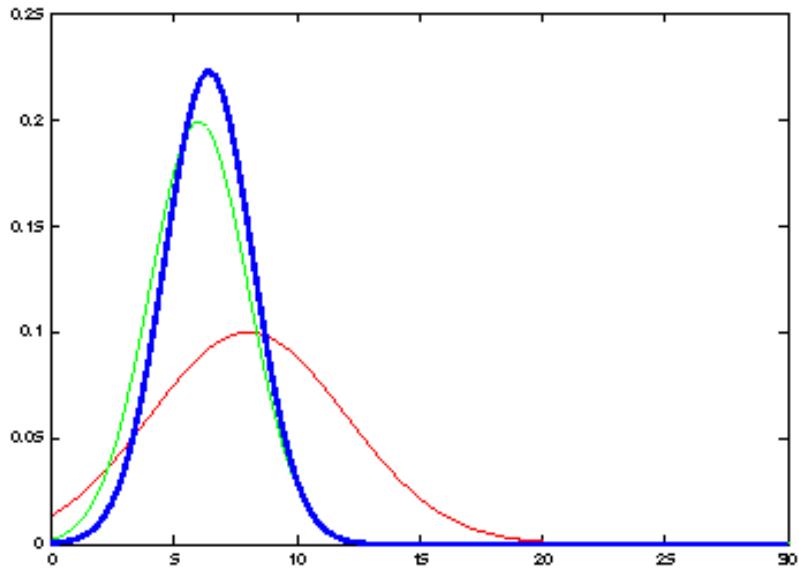

Linear Gaussian Systems: Initialization

- Initial belief is normally distributed:

$$bel(x_0) = N(x_0; \mu_0, \Sigma_0)$$

Linear Gaussian Systems: Dynamics

- Dynamics are linear function of state and control plus additive noise:

$$x_t = A_t x_{t-1} + B_t u_t + \varepsilon_t$$

$$p(x_t | u_t, x_{t-1}) = N(x_t; A_t x_{t-1} + B_t u_t, R_t)$$

$$\overline{bel}(x_t) = \int p(x_t | u_t, x_{t-1}) bel(x_{t-1}) dx_{t-1}$$



$$\sim N(x_t; A_t x_{t-1} + B_t u_t, R_t) \quad \sim N(x_{t-1}; \mu_{t-1}, \Sigma_{t-1})$$

Linear Gaussian Systems: Dynamics

$$\begin{aligned}
 \overline{bel}(x_t) &= \int p(x_t | u_t, x_{t-1}) & bel(x_{t-1}) dx_{t-1} \\
 &\quad \Downarrow & \quad \Downarrow \\
 &\sim N(x_t; A_t x_{t-1} + B_t u_t, R_t) & \sim N(x_{t-1}; \mu_{t-1}, \Sigma_{t-1}) \\
 &\quad \Downarrow & \\
 \overline{bel}(x_t) &= \eta \int \exp \left\{ -\frac{1}{2} (x_t - A_t x_{t-1} - B_t u_t)^T R_t^{-1} (x_t - A_t x_{t-1} - B_t u_t) \right\} \\
 &\quad \exp \left\{ -\frac{1}{2} (x_{t-1} - \mu_{t-1})^T \Sigma_{t-1}^{-1} (x_{t-1} - \mu_{t-1}) \right\} dx_{t-1} \\
 \overline{bel}(x_t) &= \begin{cases} \bar{\mu}_t = A_t \mu_{t-1} + B_t u_t \\ \bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + R_t \end{cases}
 \end{aligned}$$

Linear Gaussian Systems: Observations

- Observations are linear function of state plus additive noise:

$$z_t = C_t x_t + \delta_t$$

$$p(z_t | x_t) = N(z_t; C_t x_t, Q_t)$$

$$bel(x_t) = \eta p(z_t | x_t)$$

$$\Downarrow$$

$$\sim N(z_t; C_t x_t, Q_t)$$

$$\overline{bel}(x_t)$$

$$\Downarrow$$

$$\sim N(x_t; \bar{\mu}_t, \bar{\Sigma}_t)$$

Linear Gaussian Systems: Observations

$$\begin{aligned}
 bel(x_t) &= \eta p(z_t | x_t) & \overline{bel}(x_t) \\
 &\quad \downarrow & \quad \downarrow \\
 &\sim N(z_t; C_t x_t, Q_t) & \sim N(x_t; \bar{\mu}_t, \bar{\Sigma}_t) \\
 &\quad \downarrow \\
 bel(x_t) &= \eta \exp\left\{-\frac{1}{2}(z_t - C_t x_t)^T Q_t^{-1} (z_t - C_t x_t)\right\} \exp\left\{-\frac{1}{2}(x_t - \bar{\mu}_t)^T \bar{\Sigma}_t^{-1} (x_t - \bar{\mu}_t)\right\} \\
 bel(x_t) &= \begin{cases} \mu_t = \bar{\mu}_t + K_t(z_t - C_t \bar{\mu}_t) \\ \Sigma_t = (I - K_t C_t) \bar{\Sigma}_t \end{cases} \quad \text{with} \quad K_t = \bar{\Sigma}_t C_t^T (C_t \bar{\Sigma}_t C_t^T + Q_t)^{-1}
 \end{aligned}$$

Kalman Filter Algorithm

1. Algorithm **Kalman_filter**(μ_{t-1} , Σ_{t-1} , u_t , z_t):

2. Prediction:

$$\underline{\mu}_t = A_t \underline{\mu}_{t-1} + B_t u_t$$

$$4. \quad \bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + R_t$$

5. Correction:


$$6. \quad K_t = \bar{\Sigma}_t C_t^T (C_t \bar{\Sigma}_t C_t^T + Q_t)^{-1}$$

$$7. \quad \mu_t = \underline{\mu}_t + K_t (z_t - C_t \underline{\mu}_t)$$

$$8. \quad \Sigma_t = (I - K_t C_t) \bar{\Sigma}_t$$


9. Return μ_t , Σ_t

The Prediction-Correction-Cycle

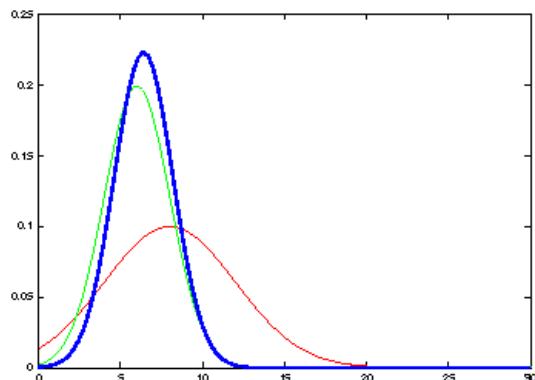


$$\overline{bel}(x_t) = \begin{cases} \bar{\mu}_t = a_t \mu_{t-1} + b_t u_t \\ \bar{\sigma}_t^2 = a_t^2 \sigma_t^2 + \sigma_{act,t}^2 \end{cases}$$

$$\overline{bel}(x_t) = \begin{cases} \bar{\mu}_t = A_t \mu_{t-1} + B_t u_t \\ \bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + R_t \end{cases}$$

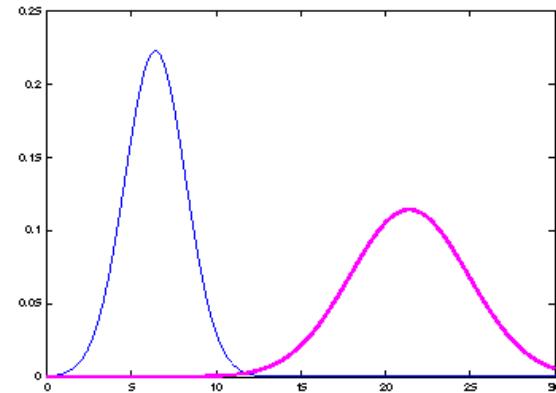


The Prediction-Correction-Cycle

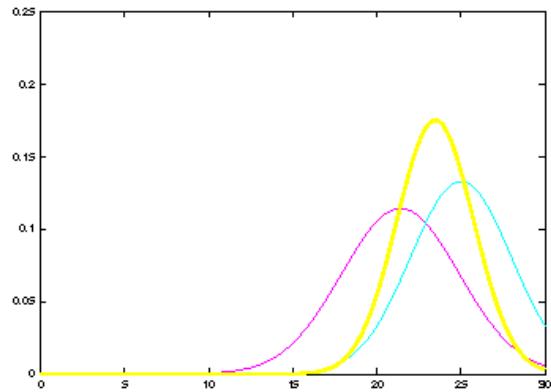

$$bel(x_t) = \begin{cases} \mu_t = \bar{\mu}_t + K_t(z_t - \bar{\mu}_t), \\ \sigma_t^2 = (1 - K_t)\bar{\sigma}_t^2, \end{cases} K_t = \frac{\bar{\sigma}_t^2}{\bar{\sigma}_t^2 + \bar{\sigma}_{obs,t}^2}$$

$$bel(x_t) = \begin{cases} \mu_t = \bar{\mu}_t + K_t(z_t - C_t \bar{\mu}_t), \\ \Sigma_t = (I - K_t C_t) \bar{\Sigma}, \end{cases} K_t = \bar{\Sigma} C_t^T (C_t \bar{\Sigma} C_t^T + Q_t)^{-1}$$

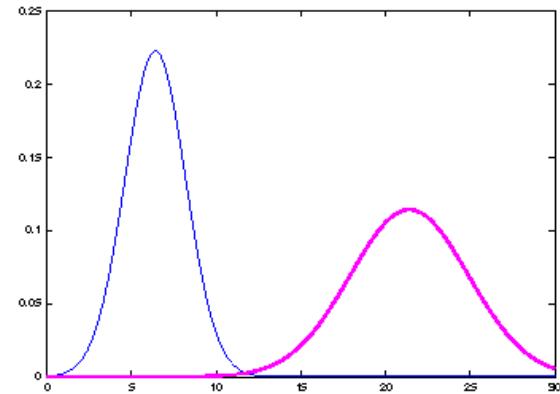

Correction

The Prediction-Correction-Cycle



$$bel(x_t) = \begin{cases} \boldsymbol{\mu} = \bar{\boldsymbol{\mu}} + K_t(z_t - \bar{\boldsymbol{\mu}}_t), & K_t = \frac{\bar{\sigma}_t^2}{\bar{\sigma}_t^2 + \bar{\sigma}_{obs,t}^2} \\ \boldsymbol{\sigma}_t^2 = (1 - K_t)\bar{\sigma}_t^2 & \end{cases}$$

$$bel(x_t) = \begin{cases} \boldsymbol{\mu} = \bar{\boldsymbol{\mu}} + K_t(z_t - C_t \bar{\boldsymbol{\mu}}_t), & K_t = \bar{\Sigma} C_t^T (C_t \bar{\Sigma} C_t^T + Q_t)^{-1} \\ \boldsymbol{\Sigma}_t = (I - K_t C_t) \bar{\Sigma} & \end{cases}$$

$$\overline{bel}(x_t) = \begin{cases} \bar{\boldsymbol{\mu}} = a_t \boldsymbol{\mu}_{t-1} + b_t u_t \\ \bar{\boldsymbol{\sigma}}_t^2 = a_t^2 \boldsymbol{\sigma}_t^2 + \boldsymbol{\sigma}_{act,t}^2 \end{cases}$$

$$\overline{bel}(x_t) = \begin{cases} \bar{\boldsymbol{\mu}} = A_t \boldsymbol{\mu}_{t-1} + B_t u_t \\ \bar{\boldsymbol{\Sigma}} = A_t \boldsymbol{\Sigma}_{t-1} A_t^T + R_t \end{cases}$$



Kalman Filter Summary

- Highly efficient: Polynomial in measurement dimensionality k and state dimensionality n :
 $O(k^{2.376} + n^2)$
- Optimal for linear Gaussian systems!
- Most robotics systems are nonlinear!




Nonlinear Dynamic Systems

- Most realistic robotic problems involve nonlinear functions




$$x_t = g(u_t, x_{t-1})$$

$$z_t = h(x_t)$$




Linearity Assumption Revisited

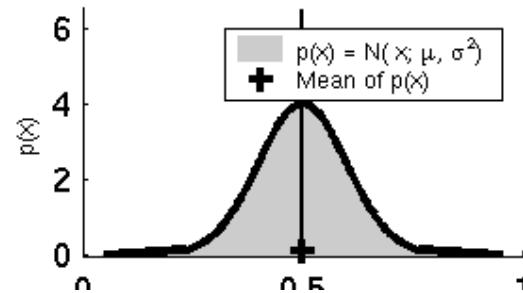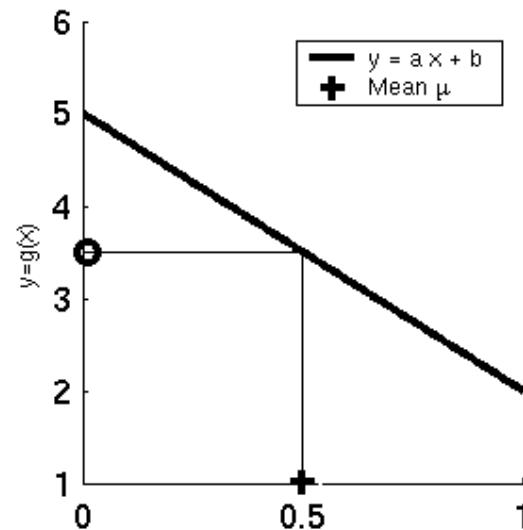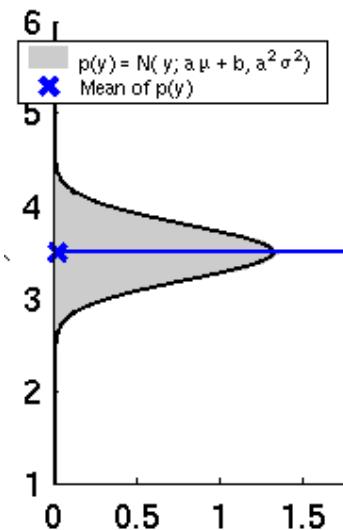




Non-linear Function

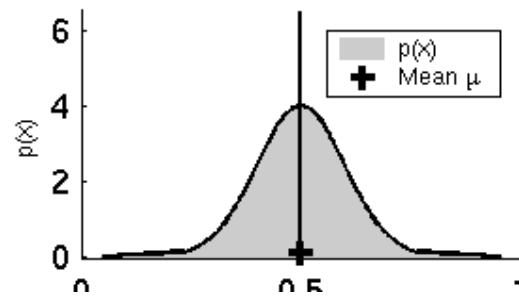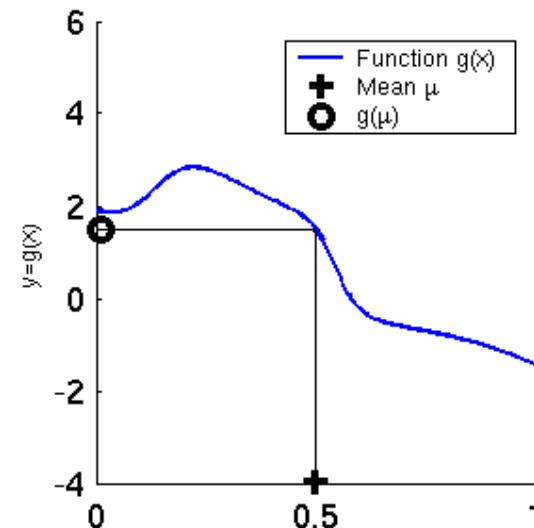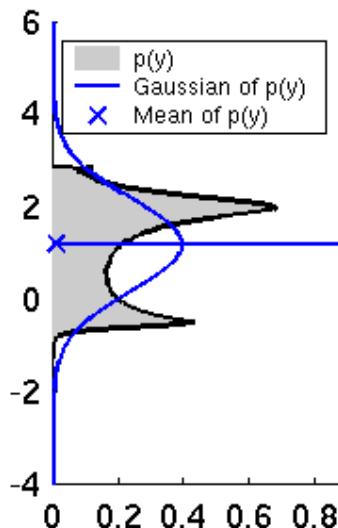




EKF Linearization (1)

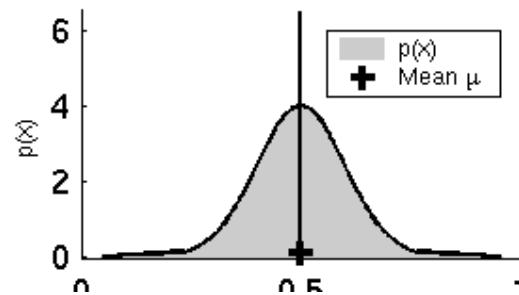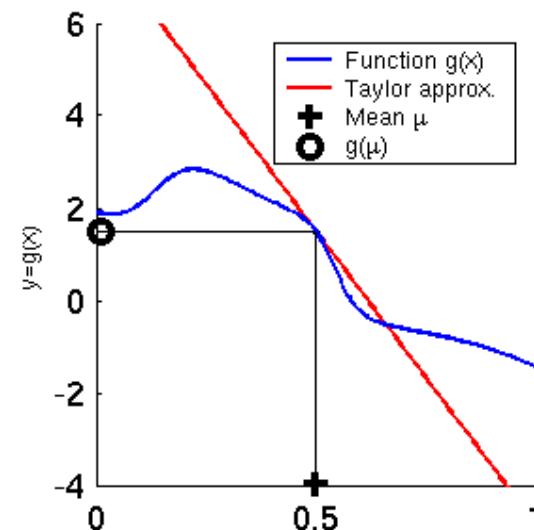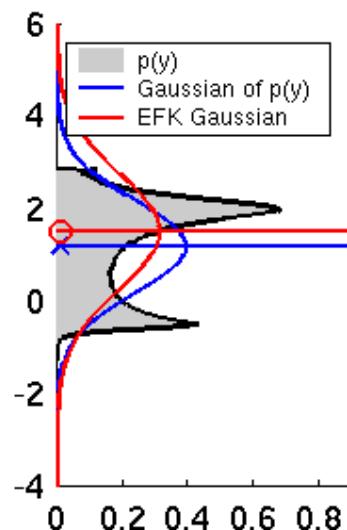

EKF Linearization (2)

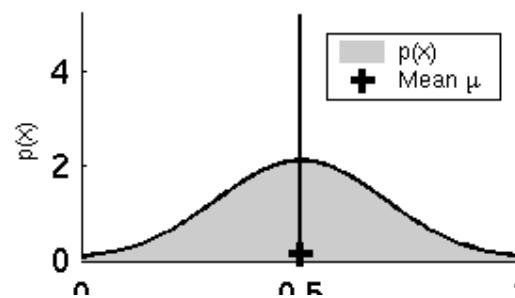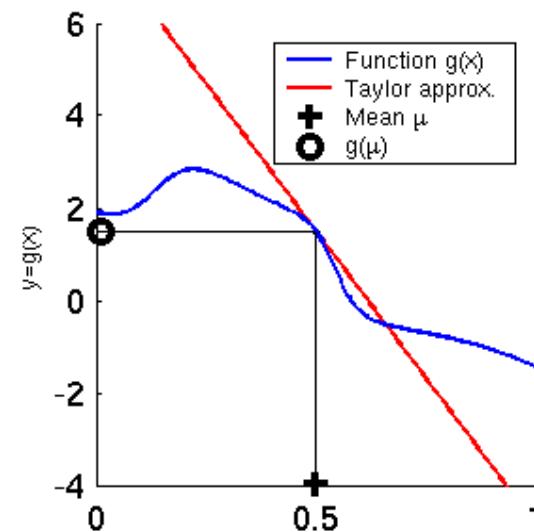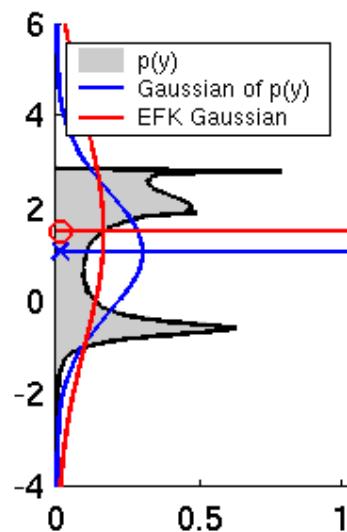

EKF Linearization (3)

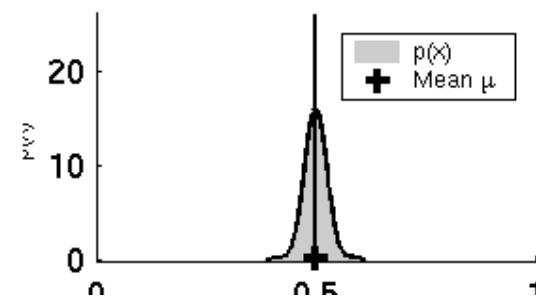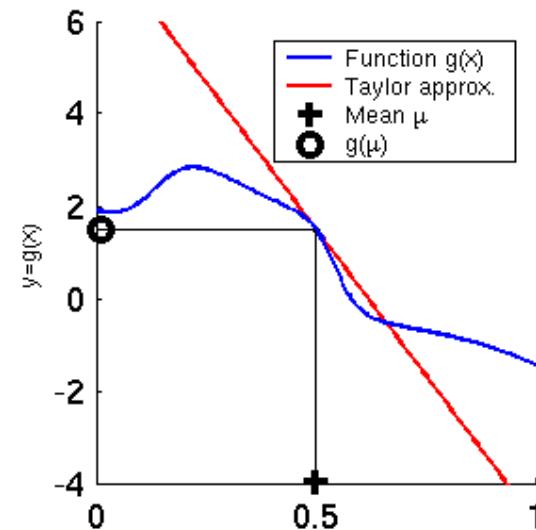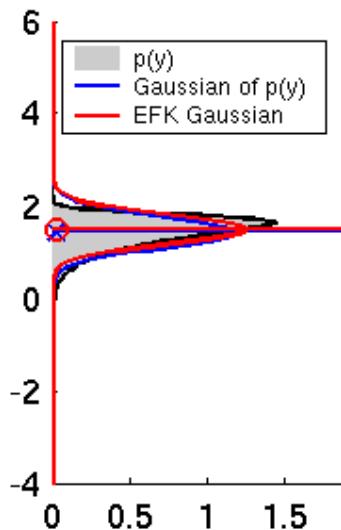

EKF Linearization: First Order Taylor Series Expansion

- Prediction:

$$g(u_t, x_{t-1}) \approx g(u_t, \mu_{t-1}) + \frac{\partial g(u_t, \mu_{t-1})}{\partial x_{t-1}} (x_{t-1} - \mu_{t-1})$$

$$g(u_t, x_{t-1}) \approx g(u_t, \mu_{t-1}) + G_t (x_{t-1} - \mu_{t-1})$$

- Correction:

$$h(x_t) \approx h(\bar{\mu}_t) + \frac{\partial h(\bar{\mu}_t)}{\partial x_t} (x_t - \bar{\mu}_t)$$

$$h(x_t) \approx h(\bar{\mu}_t) + H_t (x_t - \bar{\mu}_t)$$

EKF Algorithm

1. **Extended_Kalman_filter**(μ_{t-1} , Σ_{t-1} , u_t , z_t):

2. Prediction:

$$3. \bar{\mu}_t = g(u_t, \mu_{t-1})$$

$$\bar{\mu}_t = A_t \mu_{t-1} + B_t u_t$$

$$4. \bar{\Sigma}_t = G_t \Sigma_{t-1} G_t^T + R_t$$

$$\bar{\Sigma}_t = A_t \Sigma_{t-1} A_t^T + R_t$$

5. Correction:

$$6. K_t = \bar{\Sigma}_t H_t^T (H_t \bar{\Sigma}_t H_t^T + Q_t)^{-1}$$

$$K_t = \bar{\Sigma}_t C_t^T (C_t \bar{\Sigma}_t C_t^T + Q_t)^{-1}$$

$$7. \mu_t = \bar{\mu}_t + K_t (z_t - h(\bar{\mu}_t))$$

$$\mu_t = \bar{\mu}_t + K_t (z_t - C_t \bar{\mu}_t)$$

$$8. \Sigma_t = (I - K_t H_t) \bar{\Sigma}_t$$

$$\Sigma_t = (I - K_t C_t) \bar{\Sigma}_t$$

9. Return μ_t , Σ_t

$$H_t = \frac{\partial h(\bar{\mu}_t)}{\partial x_t}$$

$$G_t = \frac{\partial g(u_t, \mu_{t-1})}{\partial x_{t-1}}$$

Localization

“Using sensory information to locate the robot in its environment is the most fundamental problem to providing a mobile robot with autonomous capabilities.” [Cox '91]

- **Given**
 - Map of the environment.
 - Sequence of sensor measurements.
- **Wanted**
 - Estimate of the robot’s position.
- **Problem classes**
 - Position tracking
 - Global localization
 - Kidnapped robot problem (recovery)

Landmark-based Localization



1. EKF_localization (μ_{t-1} , Σ_{t-1} , u_t , z_t , m):

Prediction:

$$2. G_t = \frac{\partial g(u_t, \mu_{t-1})}{\partial x_{t-1}} = \begin{pmatrix} \frac{\partial x'}{\partial \mu_{t-1,x}} & \frac{\partial x'}{\partial \mu_{t-1,y}} & \frac{\partial x'}{\partial \mu_{t-1,\theta}} \\ \frac{\partial y'}{\partial \mu_{t-1,x}} & \frac{\partial y'}{\partial \mu_{t-1,y}} & \frac{\partial y'}{\partial \mu_{t-1,\theta}} \\ \frac{\partial \theta'}{\partial \mu_{t-1,x}} & \frac{\partial \theta'}{\partial \mu_{t-1,y}} & \frac{\partial \theta'}{\partial \mu_{t-1,\theta}} \end{pmatrix} \text{ Jacobian of } g \text{ w.r.t location}$$

$$3. V_t = \frac{\partial g(u_t, \mu_{t-1})}{\partial u_t} = \begin{pmatrix} \frac{\partial x'}{\partial v_t} & \frac{\partial x'}{\partial \omega_t} \\ \frac{\partial y'}{\partial v_t} & \frac{\partial y'}{\partial \omega_t} \\ \frac{\partial \theta'}{\partial v_t} & \frac{\partial \theta'}{\partial \omega_t} \end{pmatrix} \text{ Jacobian of } g \text{ w.r.t control}$$

$$4. M_t = \begin{pmatrix} (\alpha_1 |v_t| + \alpha_2 |\omega_t|)^2 & 0 \\ 0 & (\alpha_3 |v_t| + \alpha_4 |\omega_t|)^2 \end{pmatrix} \text{ Motion noise}$$

$$5. \bar{\mu}_t = g(u_t, \mu_{t-1})$$

Predicted mean

$$6. \bar{\Sigma}_t = G_t \Sigma_{t-1} G_t^T + V_t M_t V_t^T$$

Predicted covariance

1. EKF_localization (μ_{t-1} , Σ_{t-1} , u_t , z_t , m):

Correction:

2. $\hat{z}_t = \begin{pmatrix} \sqrt{(m_x - \bar{\mu}_{t,x})^2 + (m_y - \bar{\mu}_{t,y})^2} \\ \text{atan } 2(m_y - \bar{\mu}_{t,y}, m_x - \bar{\mu}_{t,x}) - \bar{\mu}_{t,\theta} \end{pmatrix}$ Predicted measurement mean

3. $H_t = \frac{\partial h(\bar{\mu}_t, m)}{\partial x_t} = \begin{pmatrix} \frac{\partial r_t}{\partial \bar{\mu}_{t,x}} & \frac{\partial r_t}{\partial \bar{\mu}_{t,y}} & \frac{\partial r_t}{\partial \bar{\mu}_{t,\theta}} \\ \frac{\partial \varphi_t}{\partial \bar{\mu}_{t,x}} & \frac{\partial \varphi_t}{\partial \bar{\mu}_{t,y}} & \frac{\partial \varphi_t}{\partial \bar{\mu}_{t,\theta}} \end{pmatrix}$ Jacobian of h w.r.t location

4. $Q_t = \begin{pmatrix} \sigma_r^2 & 0 \\ 0 & \sigma_r^2 \end{pmatrix}$

5. $S_t = H_t \bar{\Sigma}_t H_t^T + Q_t$

6. $K_t = \bar{\Sigma}_t H_t^T S_t^{-1}$

7. $\mu_t = \bar{\mu}_t + K_t(z_t - \hat{z}_t)$

8. $\Sigma_t = (I - K_t H_t) \bar{\Sigma}_t$





Pred. measurement covariance

Kalman gain





Updated mean

Updated covariance





EKF Prediction Step

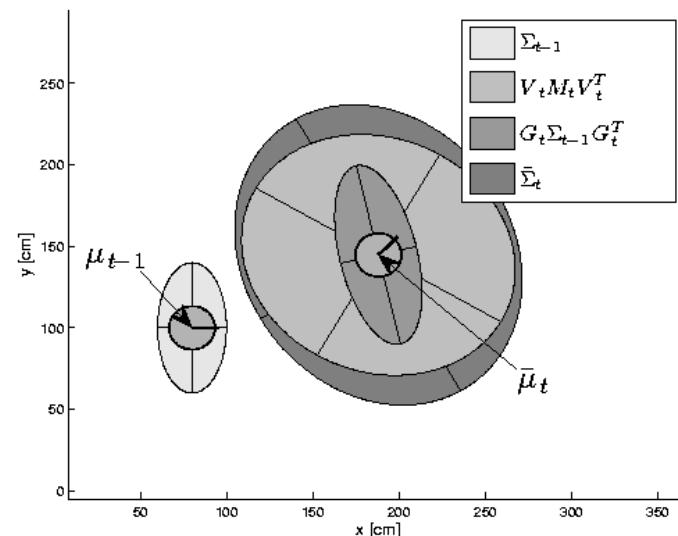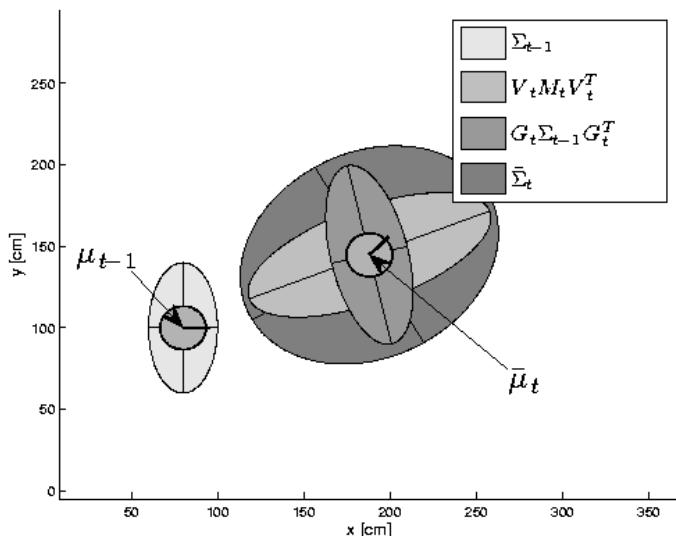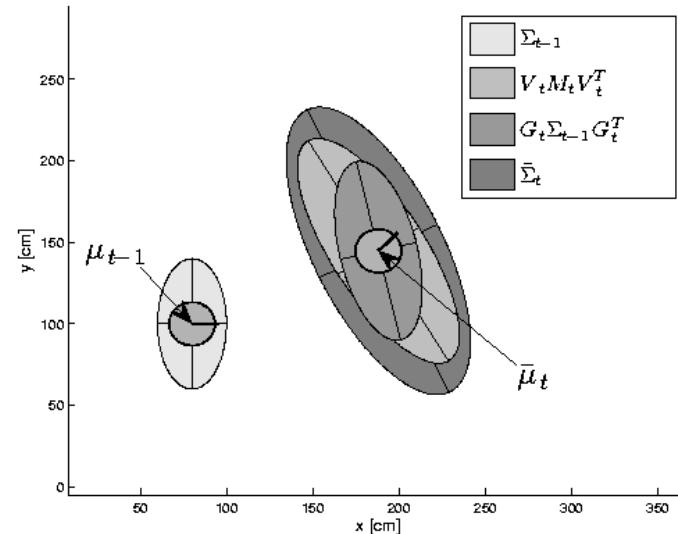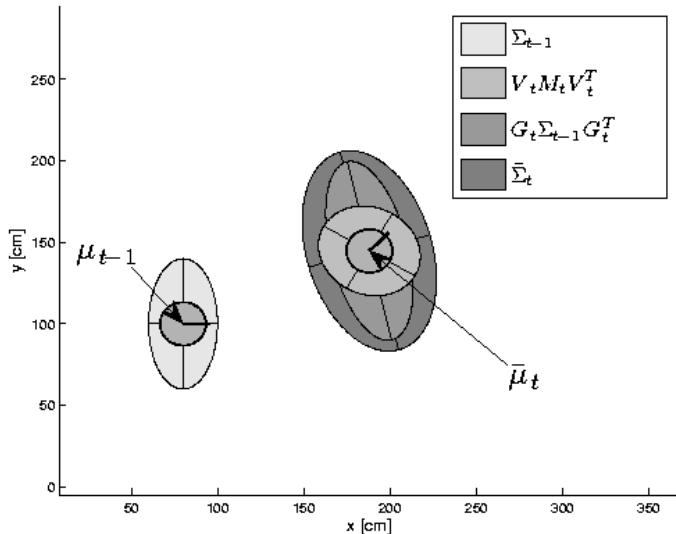



EKF Observation Prediction Step

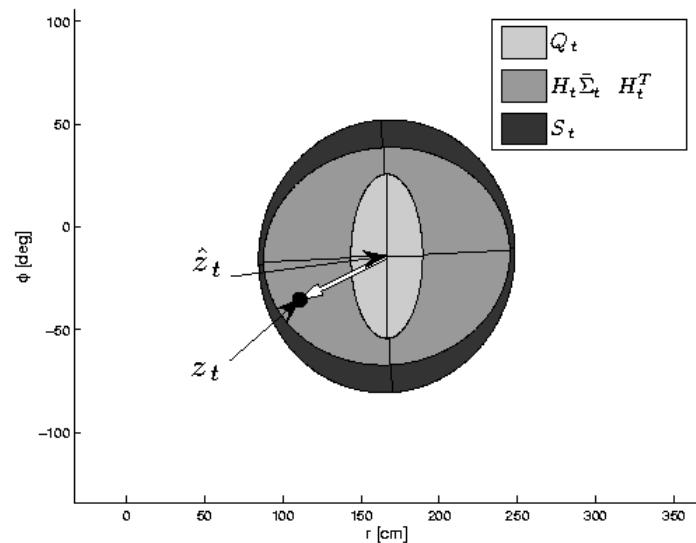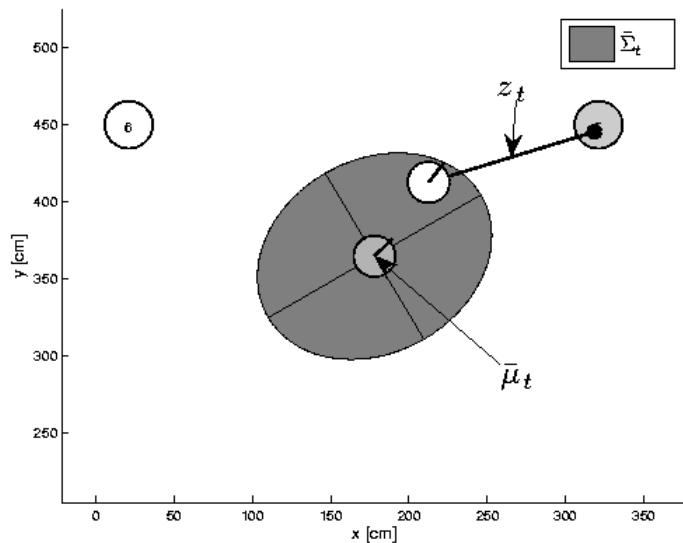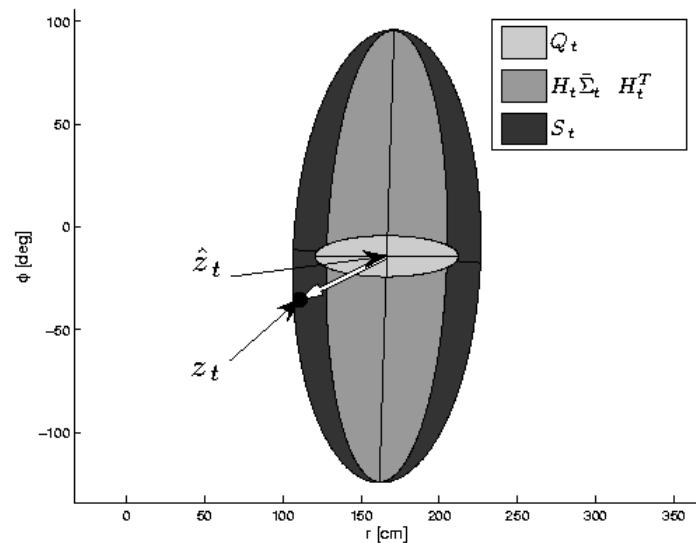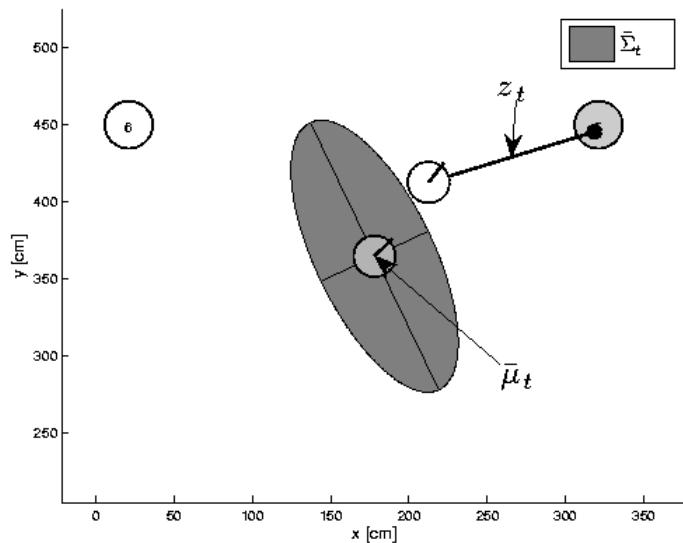



EKF Correction Step

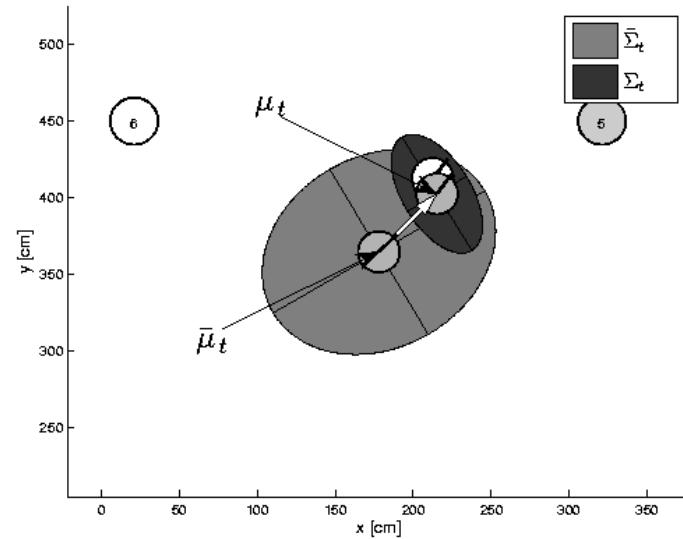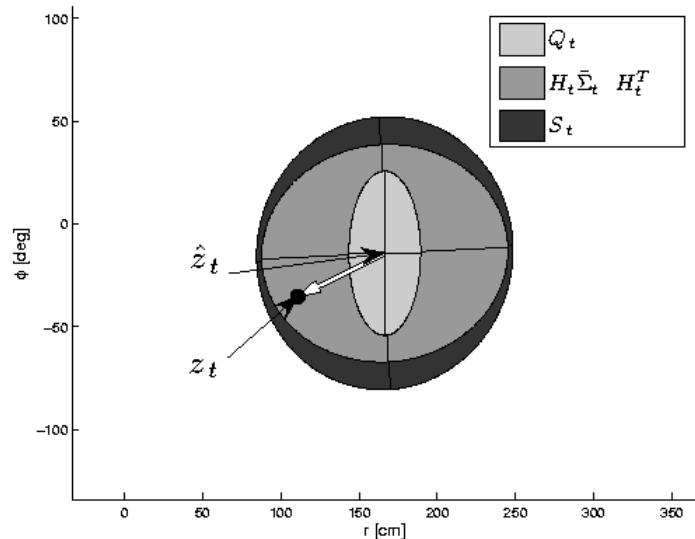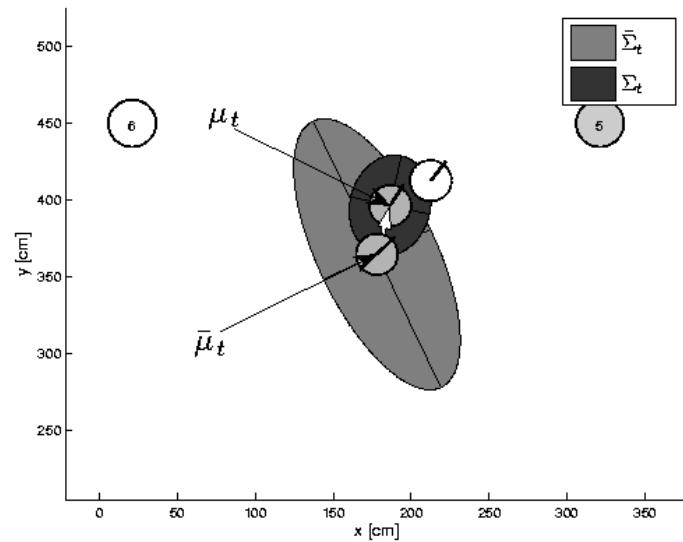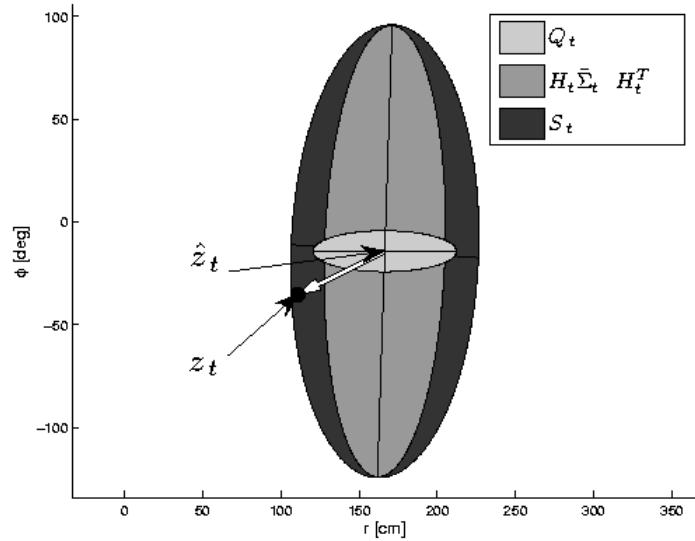


Estimation Sequence (1)

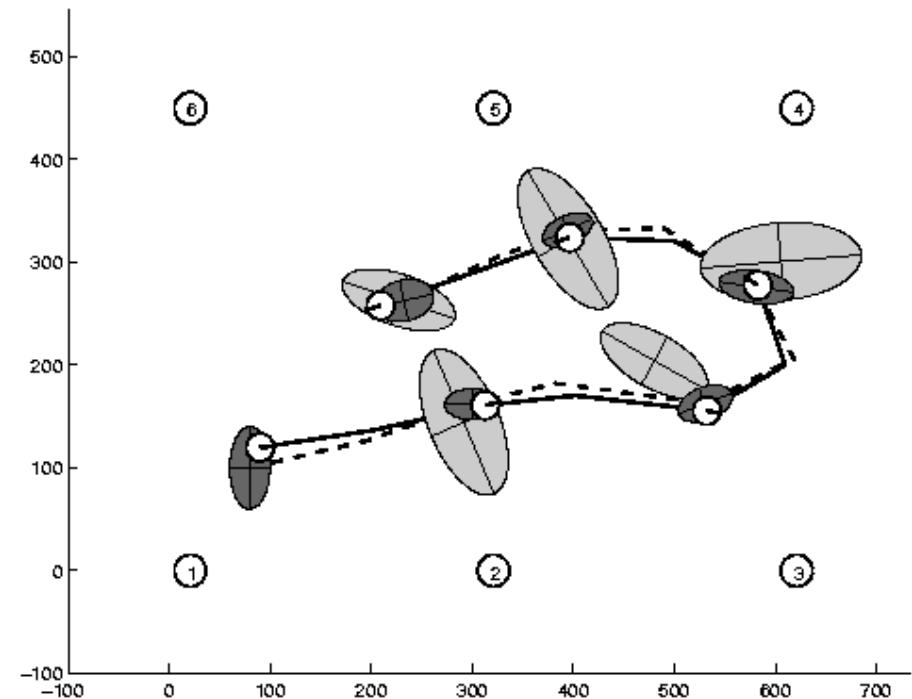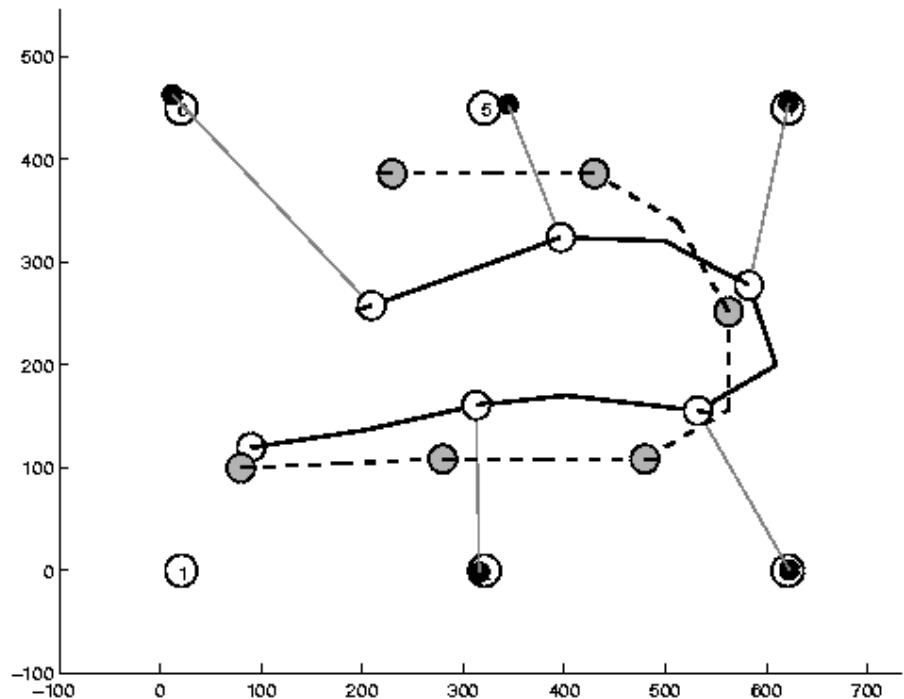

Estimation Sequence (2)

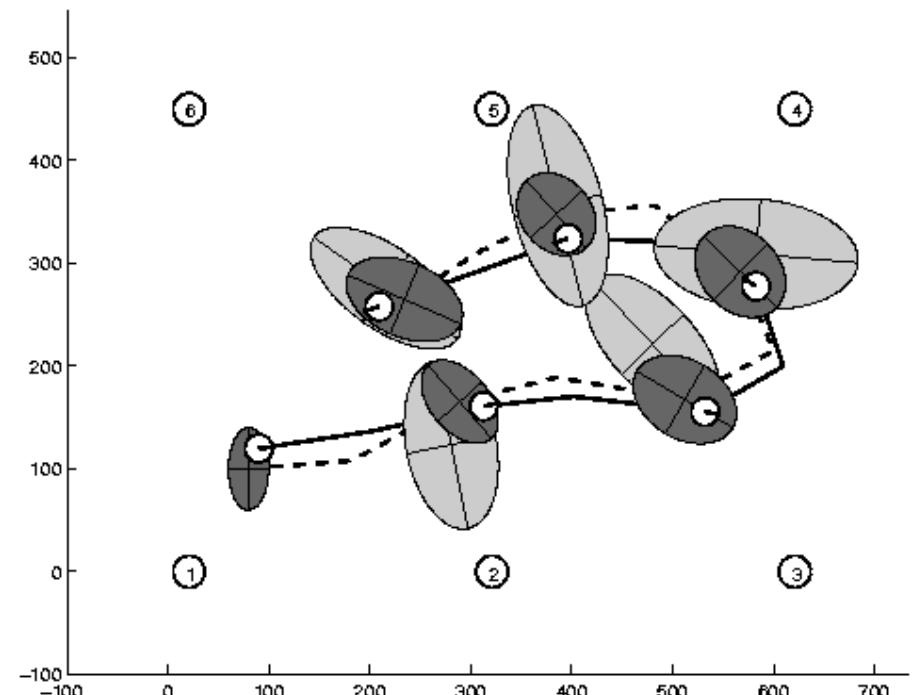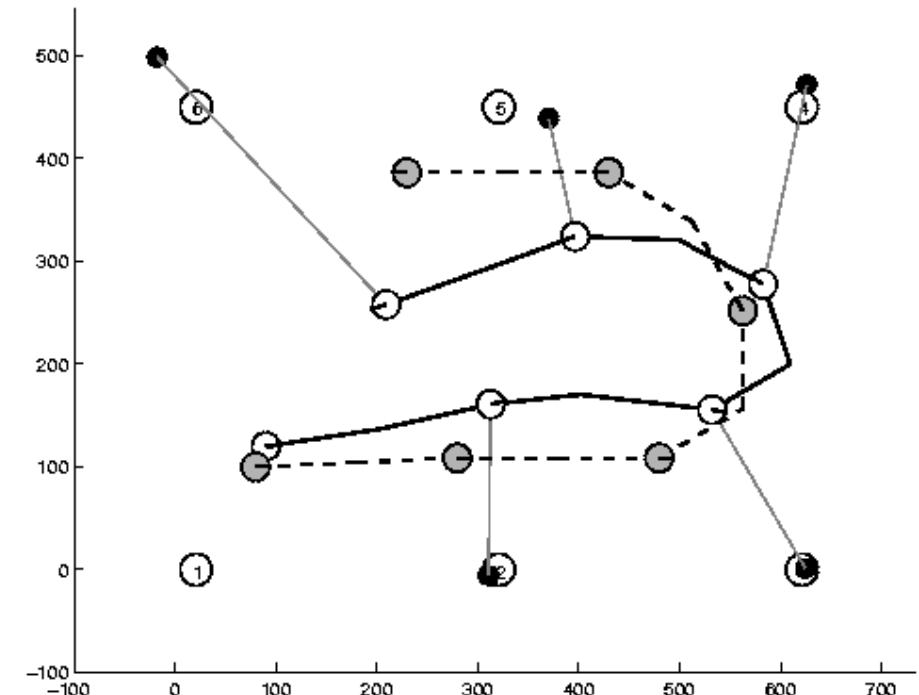

Comparison to GroundTruth

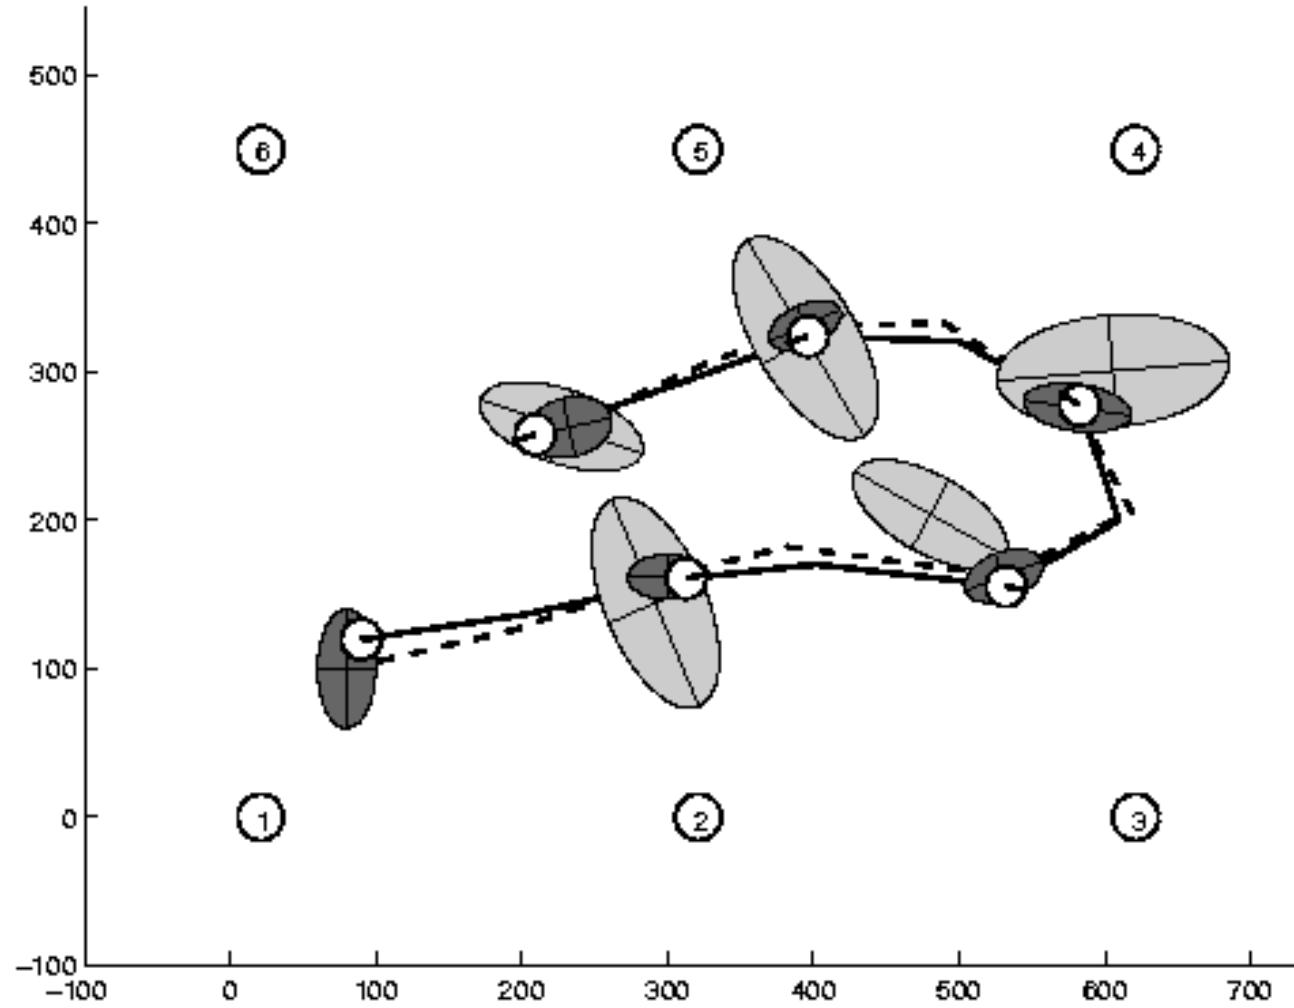


EKF Summary

- Highly efficient: Polynomial in measurement dimensionality k and state dimensionality n :


$$O(k^{2.376} + n^2)$$

- Not optimal!
- Can diverge if nonlinearities are large!
- Works surprisingly well even when all assumptions are violated!



Linearization via Unscented Transform

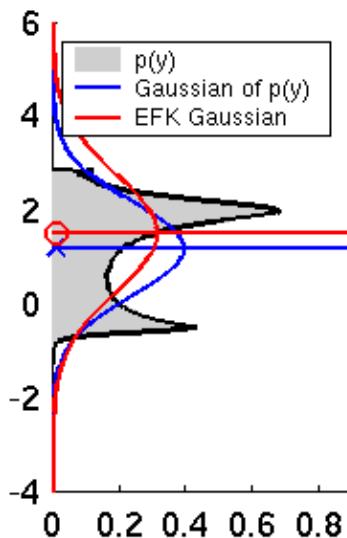


EKF

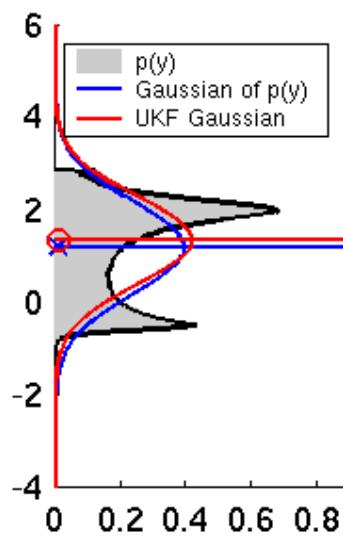


UKF

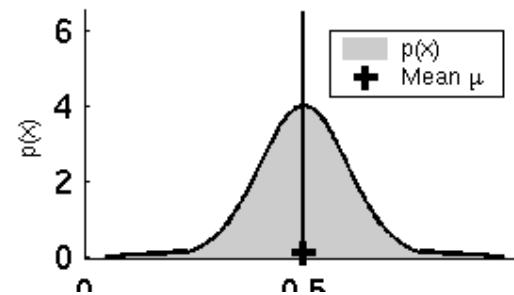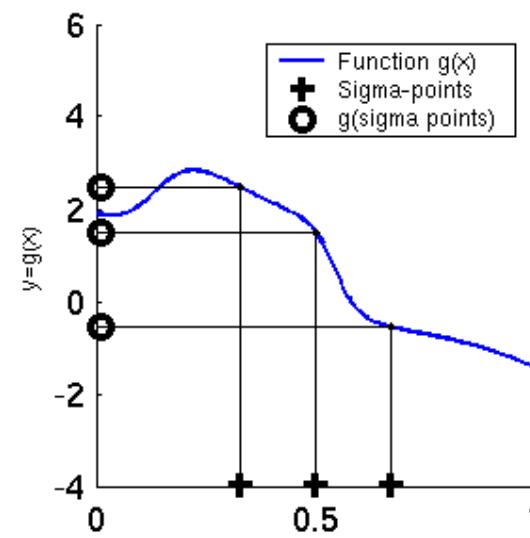



UKF Sigma-Point Estimate (2)

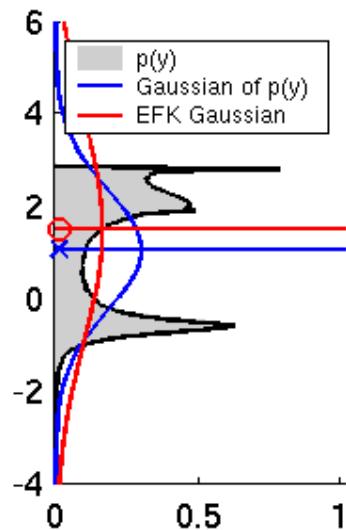


EKF

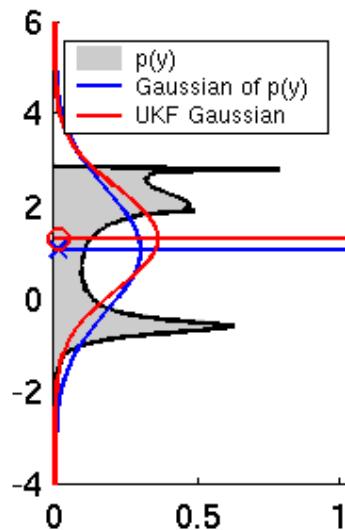


UKF

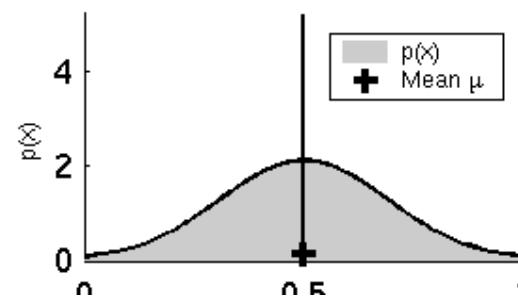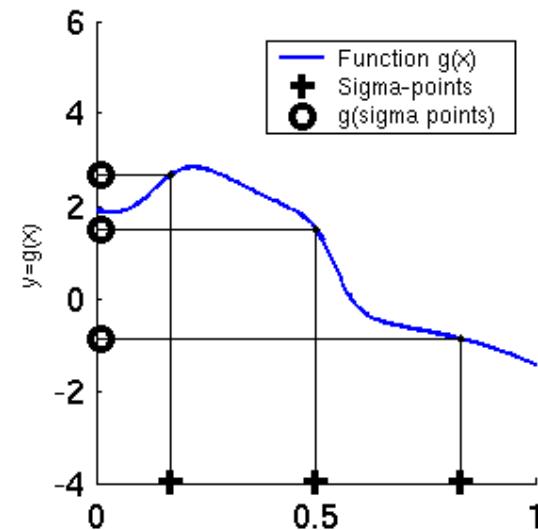



UKF Sigma-Point Estimate (3)

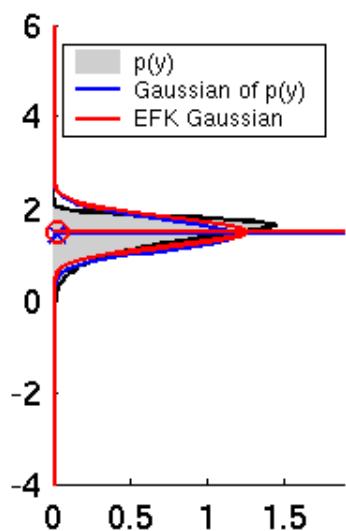

EKF

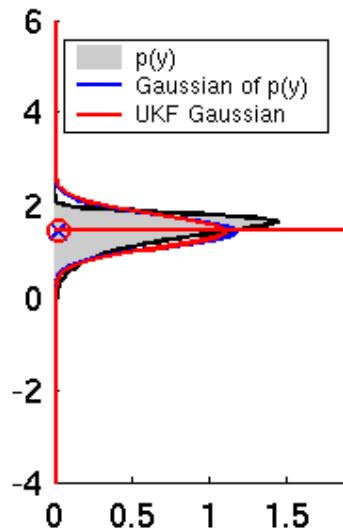

UKF

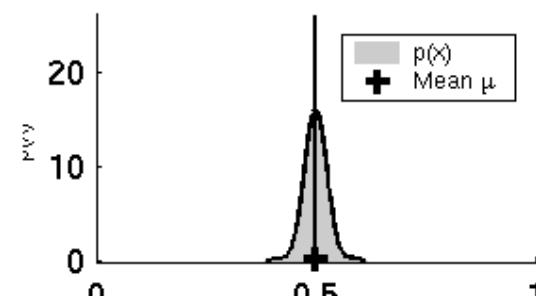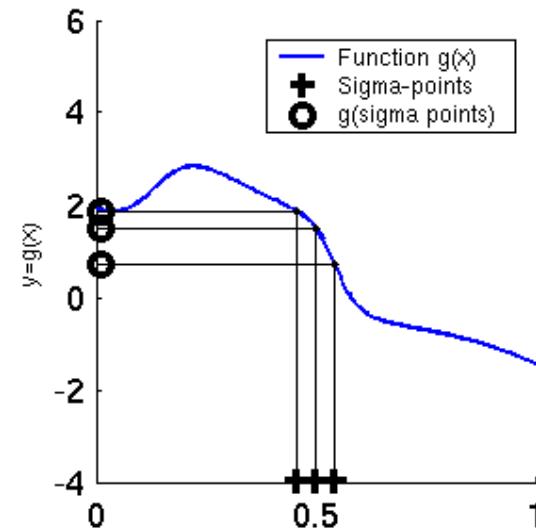

Unscented Transform

Sigma points

$$\chi^0 = \mu$$

$$\chi^i = \mu \pm \left(\sqrt{(n+\lambda)\Sigma} \right)_i$$

Weights

$$w_m^0 = \frac{\lambda}{n+\lambda} \quad w_c^0 = \frac{\lambda}{n+\lambda} + (1 - \alpha^2 + \beta)$$

$$w_m^i = w_c^i = \frac{1}{2(n+\lambda)} \quad \text{for } i=1,\dots,2n$$

Pass sigma points through nonlinear function

$$\psi^i = g(\chi^i)$$

Recover mean and covariance

$$\mu' = \sum_{i=0}^{2n} w_m^i \psi^i$$

$$\Sigma' = \sum_{i=0}^{2n} w_c^i (\psi^i - \mu)(\psi^i - \mu)^T$$

UKF_localization ($\mu_{t,1}, \Sigma_{t,1}, u_t, z_t, m$):

Prediction:

$$M_t = \begin{pmatrix} (\alpha_1 |v_t| + \alpha_2 |\omega_t|)^2 & 0 \\ 0 & (\alpha_3 |v_t| + \alpha_4 |\omega_t|)^2 \end{pmatrix} \text{ Motion noise}$$

$$Q_t = \begin{pmatrix} \sigma_r^2 & 0 \\ 0 & \sigma_r^2 \end{pmatrix} \text{ Measurement noise}$$

$$\mu_{t-1}^a = \begin{pmatrix} \mu_{t-1}^T & (0\ 0)^T & (0\ 0)^T \end{pmatrix} \text{ Augmented state mean}$$

$$\Sigma_{t-1}^a = \begin{pmatrix} \Sigma_{t-1} & 0 & 0 \\ 0 & M_t & 0 \\ 0 & 0 & Q_t \end{pmatrix} \text{ Augmented covariance}$$

$$\chi_{t-1}^a = \begin{pmatrix} \mu_{t-1}^a & \mu_{t-1}^a + \gamma \sqrt{\Sigma_{t-1}^a} & \mu_{t-1}^a - \gamma \sqrt{\Sigma_{t-1}^a} \end{pmatrix} \text{ Sigma points}$$

$$\bar{\chi}_t^x = g(u_t + \chi_t^u, \chi_{t-1}^x) \text{ Prediction of sigma points}$$

$$\bar{\mu}_t = \sum_{i=0}^{2L} w_m^i \chi_{i,t}^x \text{ Predicted mean}$$

$$\bar{\Sigma}_t = \sum_{i=0}^{2L} w_c^i (\chi_{i,t}^x - \bar{\mu}_t) (\chi_{i,t}^x - \bar{\mu}_t)^T \text{ Predicted covariance}$$

UKF_localization ($\mu_{t,1}, \Sigma_{t,1}, u_t, z_t, m$):

Correction:

$$\bar{Z}_t = h(\chi_t^x) + \chi_t^z \quad \text{Measurement sigma points}$$

$$\hat{z}_t = \sum_{i=0}^{2L} w_m^i \bar{Z}_{i,t} \quad \text{Predicted measurement mean}$$

$$S_t = \sum_{i=0}^{2L} w_c^i (\bar{Z}_{i,t} - \hat{z}_t) (\bar{Z}_{i,t} - \hat{z}_t)^T \quad \text{Pred. measurement covariance}$$

$$\Sigma_t^{x,z} = \sum_{i=0}^{2L} w_c^i (\bar{\chi}_{i,t}^x - \bar{\mu}_t) (\bar{Z}_{i,t} - \hat{z}_t)^T \quad \text{Cross-covariance}$$

$$K_t = \Sigma_t^{x,z} S_t^{-1} \quad \text{Kalman gain}$$

$$\mu_t = \bar{\mu}_t + K_t (z_t - \hat{z}_t) \quad \text{Updated mean}$$

$$\Sigma_t = \bar{\Sigma}_t - K_t S_t K_t^T \quad \text{Updated covariance}$$

1. EKF_localization (μ_{t-1} , Σ_{t-1} , u_t , z_t , m):

Correction:

2. $\hat{z}_t = \begin{pmatrix} \sqrt{(m_x - \bar{\mu}_{t,x})^2 + (m_y - \bar{\mu}_{t,y})^2} \\ \text{atan } 2(m_y - \bar{\mu}_{t,y}, m_x - \bar{\mu}_{t,x}) - \bar{\mu}_{t,\theta} \end{pmatrix}$ Predicted measurement mean

3. $H_t = \frac{\partial h(\bar{\mu}_t, m)}{\partial x_t} = \begin{pmatrix} \frac{\partial r_t}{\partial \bar{\mu}_{t,x}} & \frac{\partial r_t}{\partial \bar{\mu}_{t,y}} & \frac{\partial r_t}{\partial \bar{\mu}_{t,\theta}} \\ \frac{\partial \varphi_t}{\partial \bar{\mu}_{t,x}} & \frac{\partial \varphi_t}{\partial \bar{\mu}_{t,y}} & \frac{\partial \varphi_t}{\partial \bar{\mu}_{t,\theta}} \end{pmatrix}$ Jacobian of h w.r.t location

4. $Q_t = \begin{pmatrix} \sigma_r^2 & 0 \\ 0 & \sigma_r^2 \end{pmatrix}$

5. $S_t = H_t \bar{\Sigma}_t H_t^T + Q_t$

6. $K_t = \bar{\Sigma}_t H_t^T S_t^{-1}$

7. $\mu_t = \bar{\mu}_t + K_t(z_t - \hat{z}_t)$

8. $\Sigma_t = (I - K_t H_t) \bar{\Sigma}_t$





Pred. measurement covariance

Kalman gain





Updated mean

Updated covariance





UKF Prediction Step

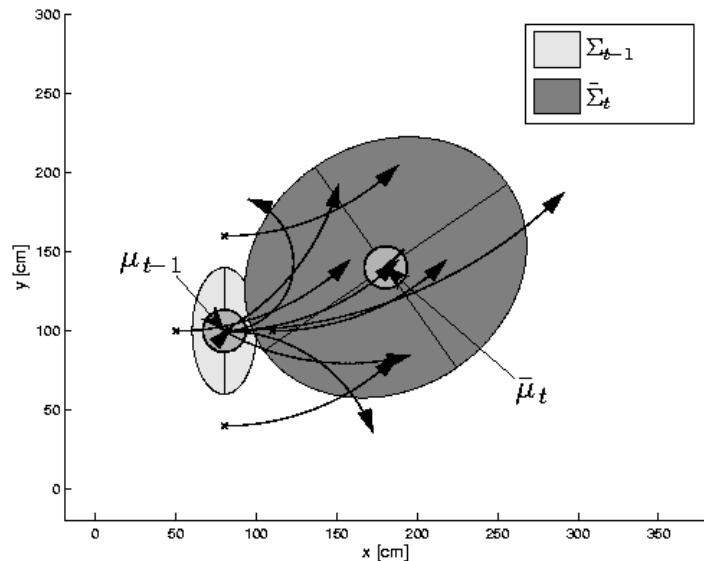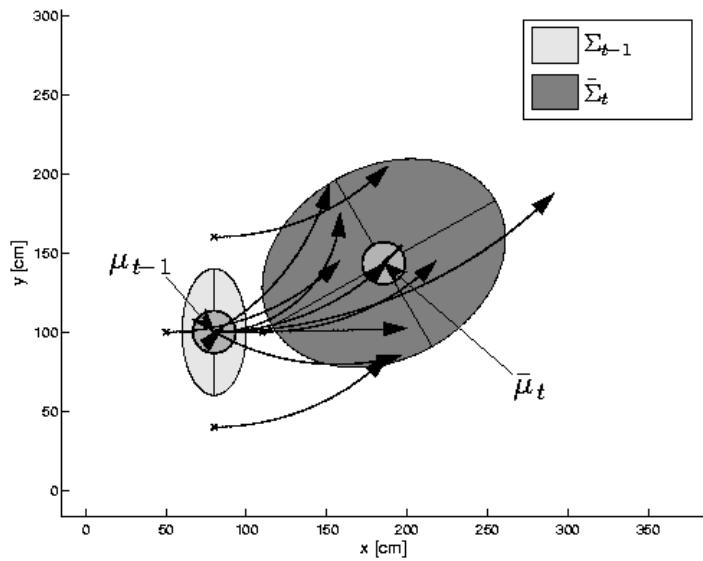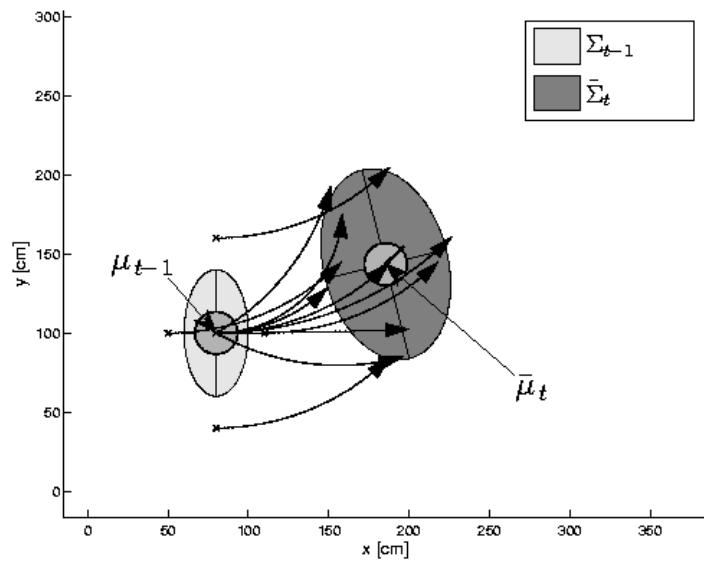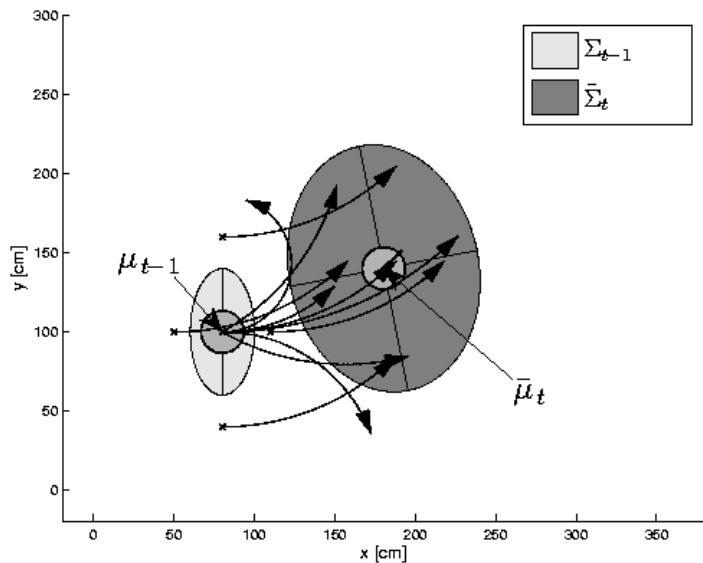





UKF Observation Prediction Step

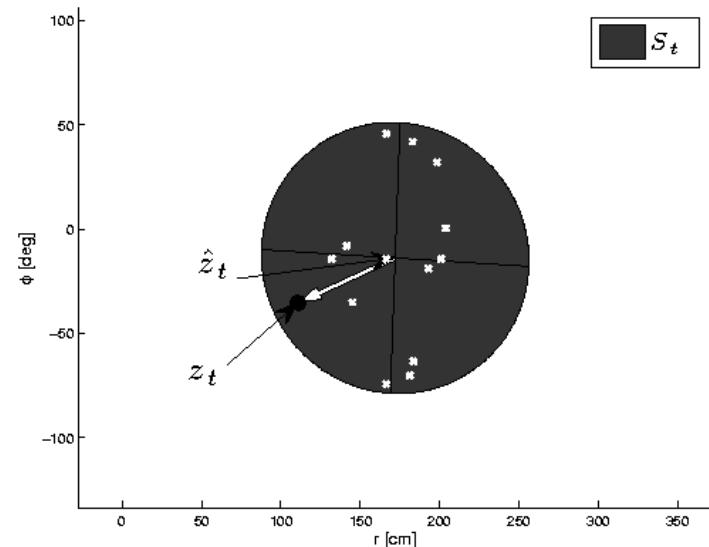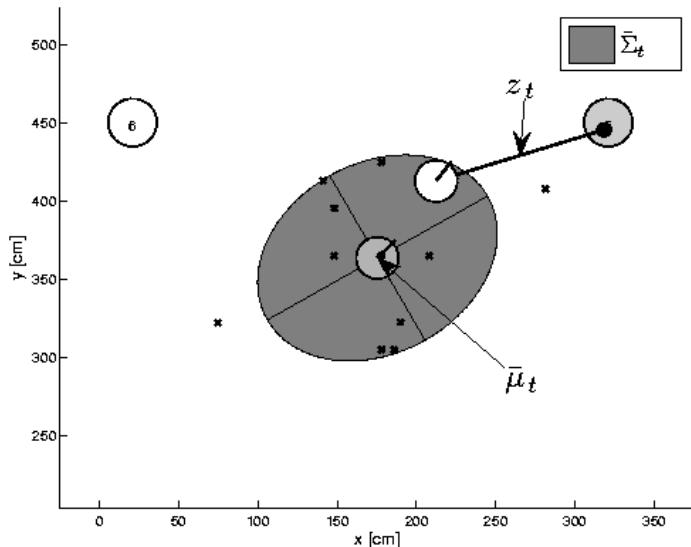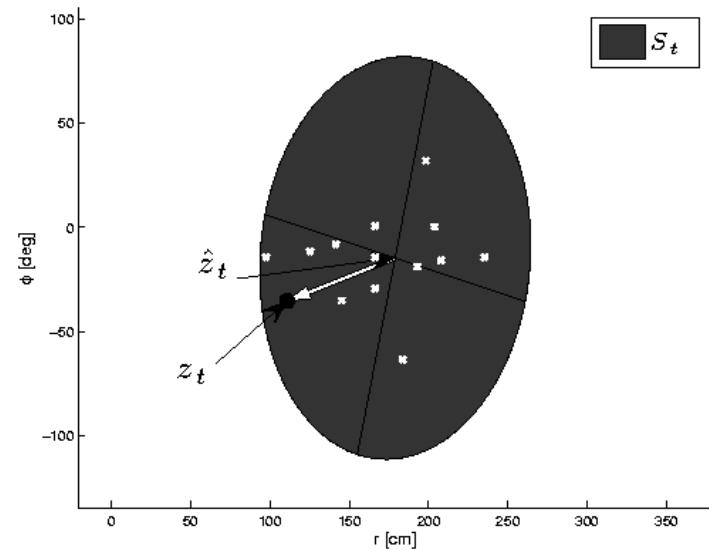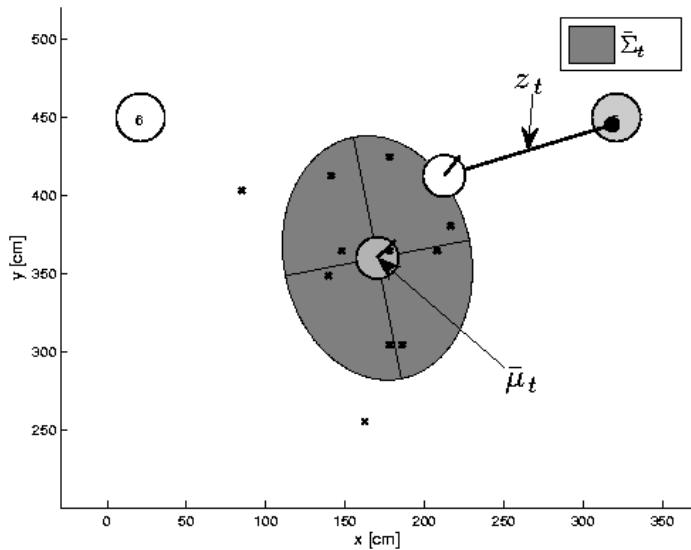


UKF Correction Step

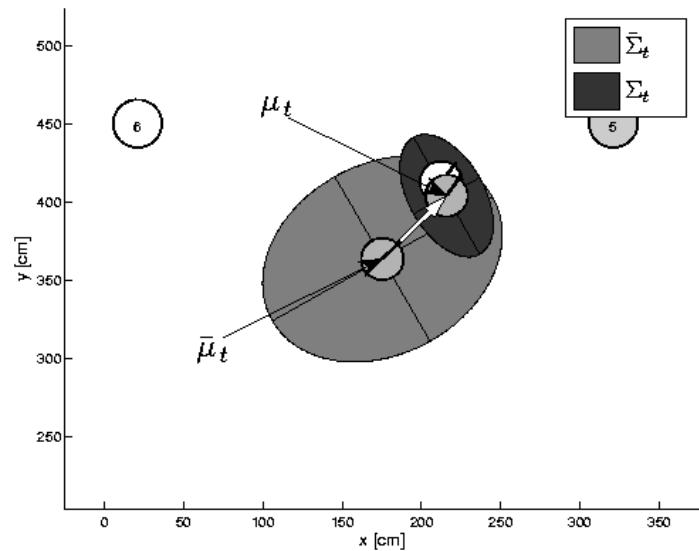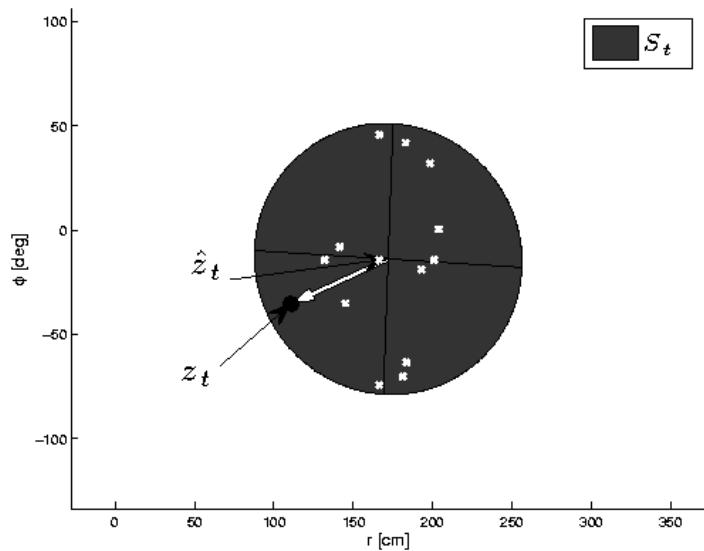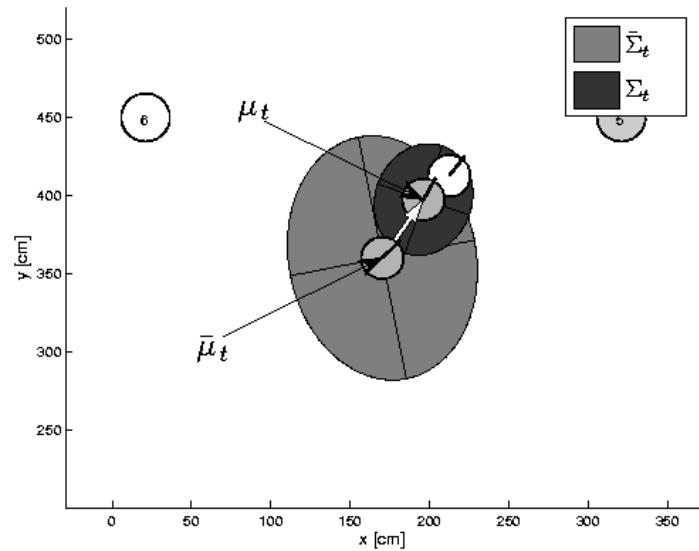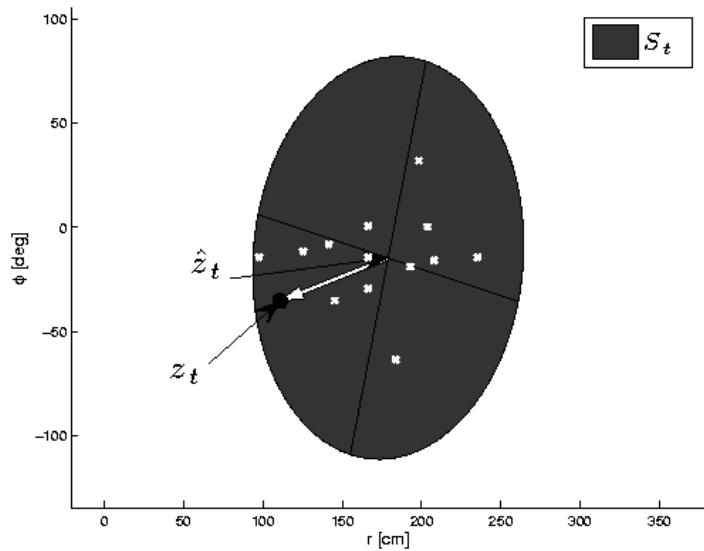


EKF Correction Step

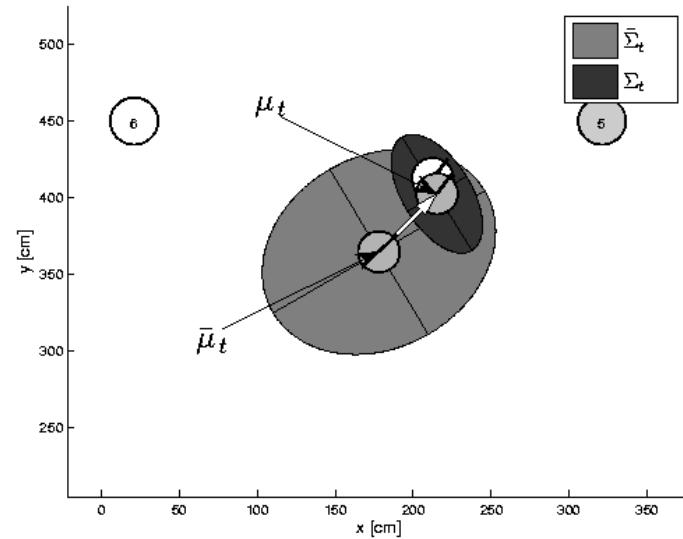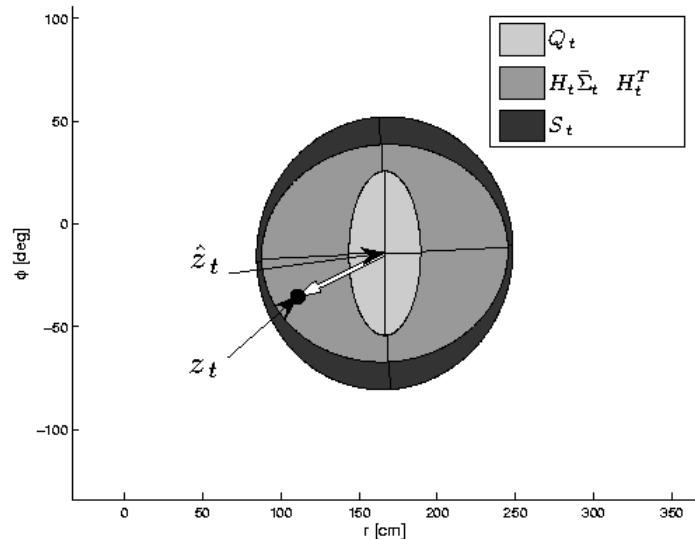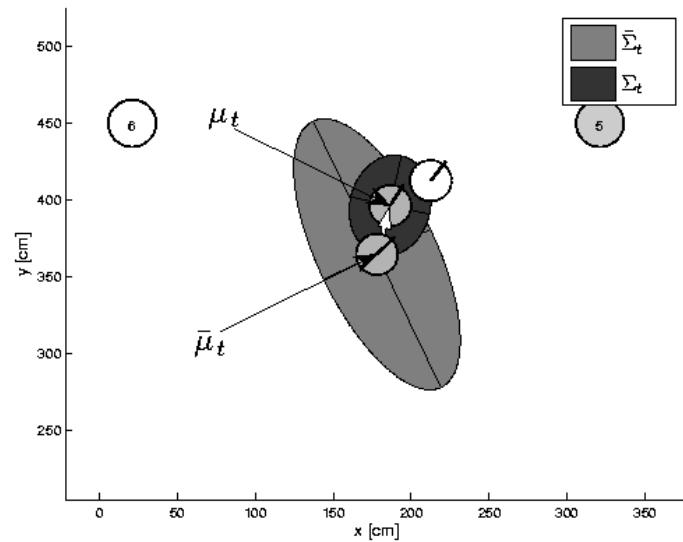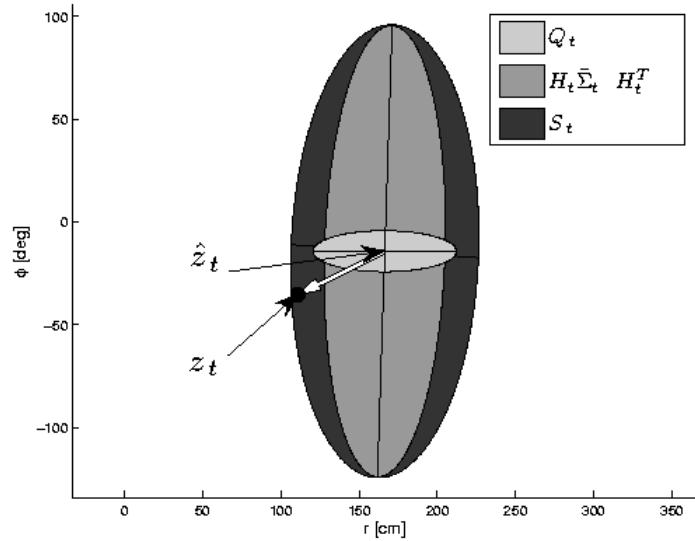


Estimation Sequence

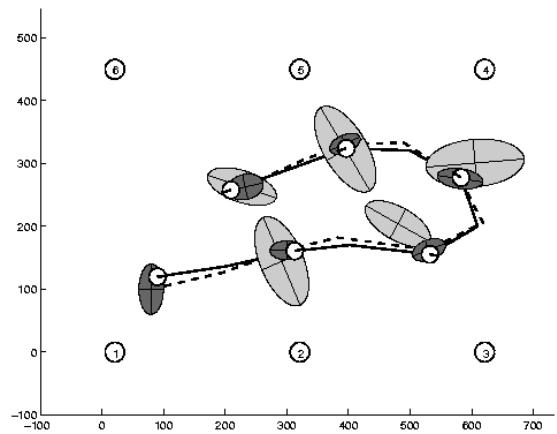

EKF

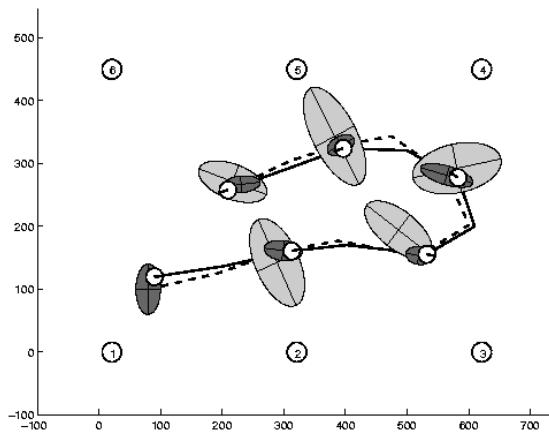


PF

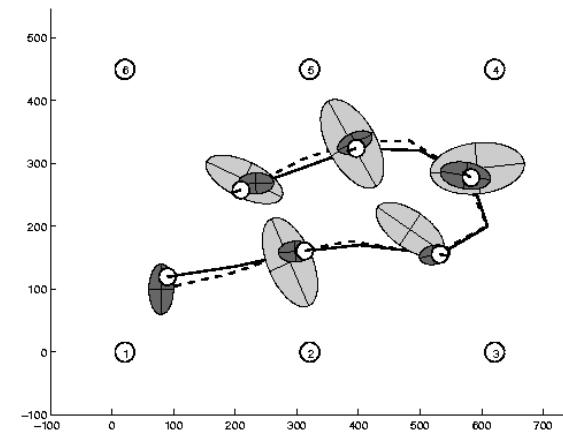


UKF

Estimation Sequence

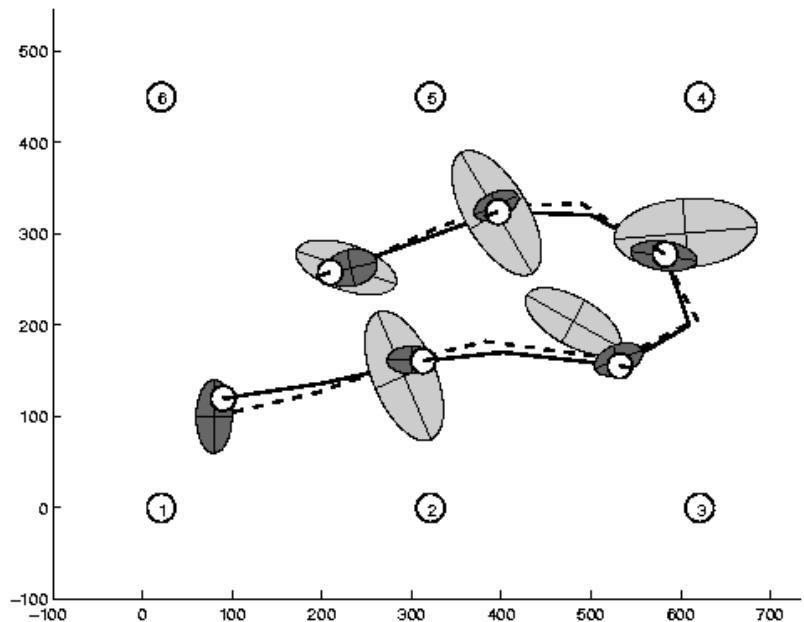


EKF

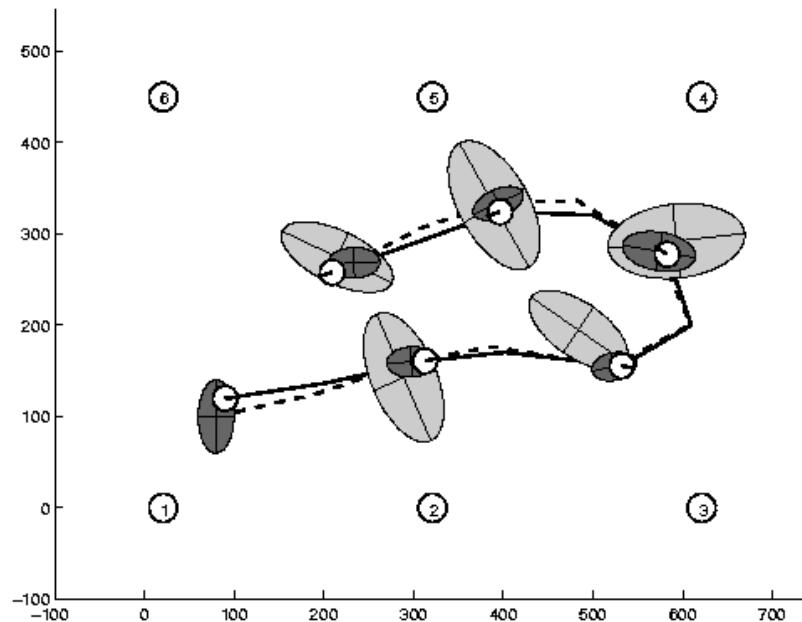


UKF

Prediction Quality

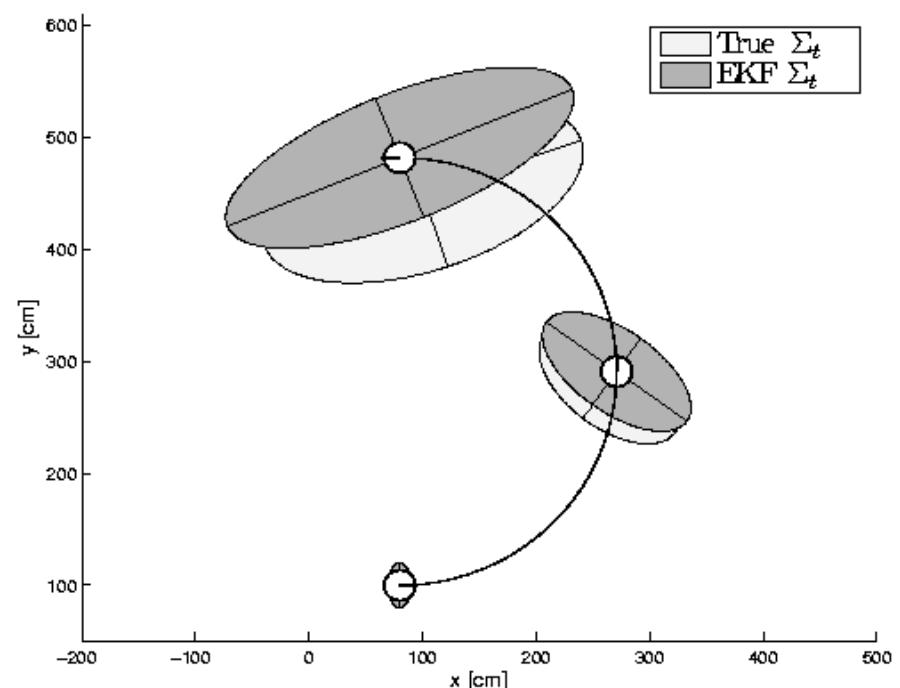

EKF

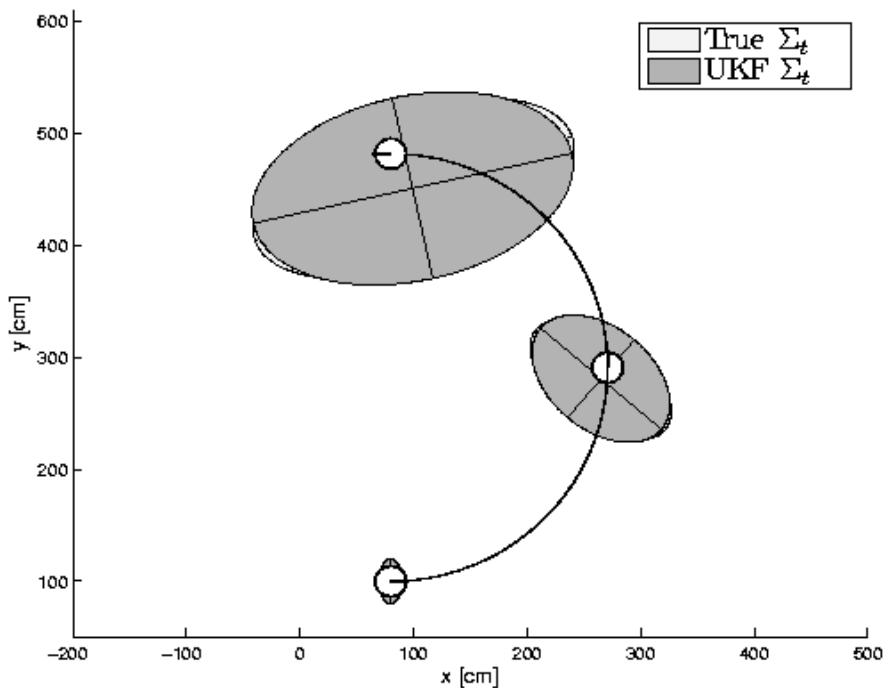


UKF

UKF Summary

- **Highly efficient:** Same complexity as EKF, with a constant factor slower in typical practical applications
- **Better linearization than EKF:** Accurate in first two terms of Taylor expansion (EKF only first term)
- **Derivative-free:** No Jacobians needed
- **Still not optimal!**


Kalman Filter-based System

- [Arras et al. 98]:
 - Laser range-finder and vision
 - High precision (<1cm accuracy)

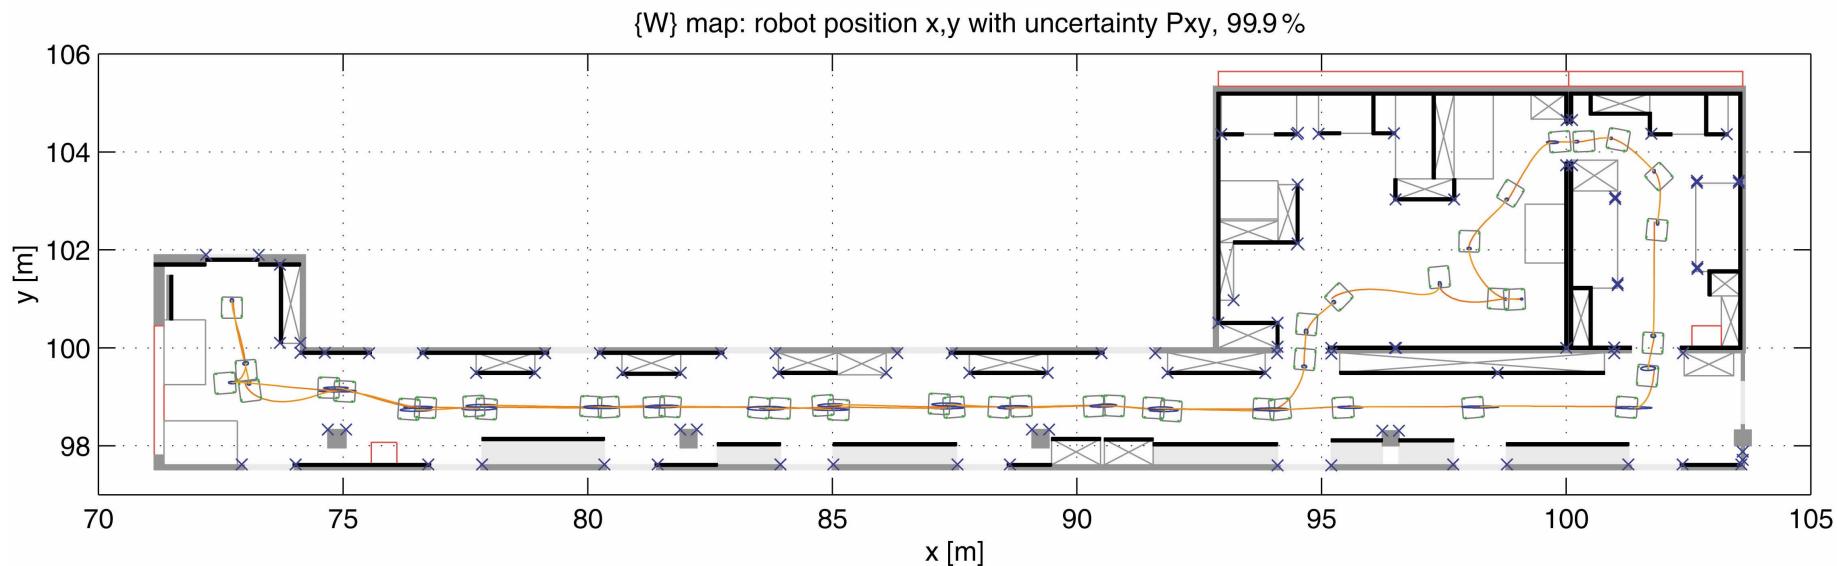

[Courtesy of Kai Arras]

Multi-hypothesis Tracking

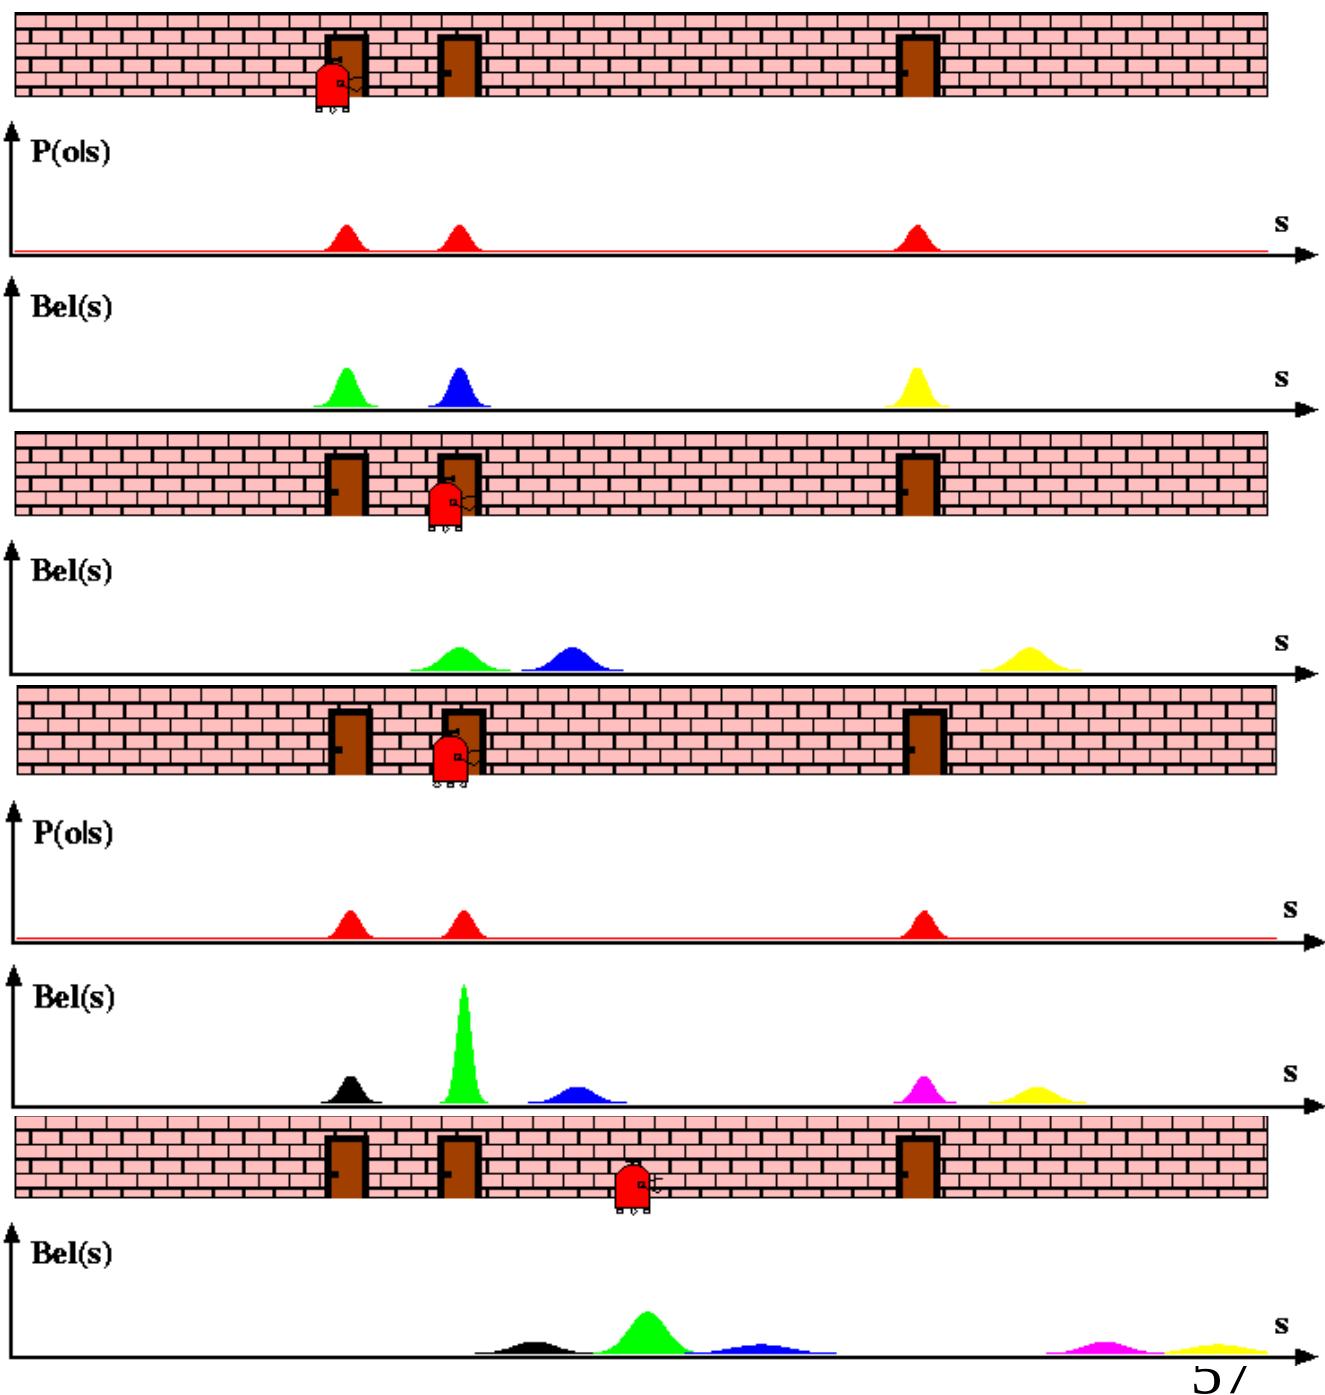

Localization With MHT

- Belief is represented by multiple hypotheses
- Each hypothesis is tracked by a Kalman filter
- **Additional problems:**
 - Data association: Which observation corresponds to which hypothesis?
 - Hypothesis management: When to add / delete hypotheses?
- Huge body of literature on target tracking, motion correspondence etc.

MHT: Implemented System (1)

- Hypotheses are extracted from LRF scans
- Each hypothesis has probability of being the correct one:

$$H_i = \{\hat{x}_i, \Sigma_i, P(H_i)\}$$

- Hypothesis probability is computed using Bayes' rule

$$P(H_i | s) = \frac{P(s | H_i)P(H_i)}{P(s)}$$

- Hypotheses with low probability are deleted.
- New candidates are extracted from LRF scans.



$$C_j = \{z_j, R_j\}$$

[Jensfelt et al. '00]

MHT: Implemented System (2)


Robot view

Pose candidates

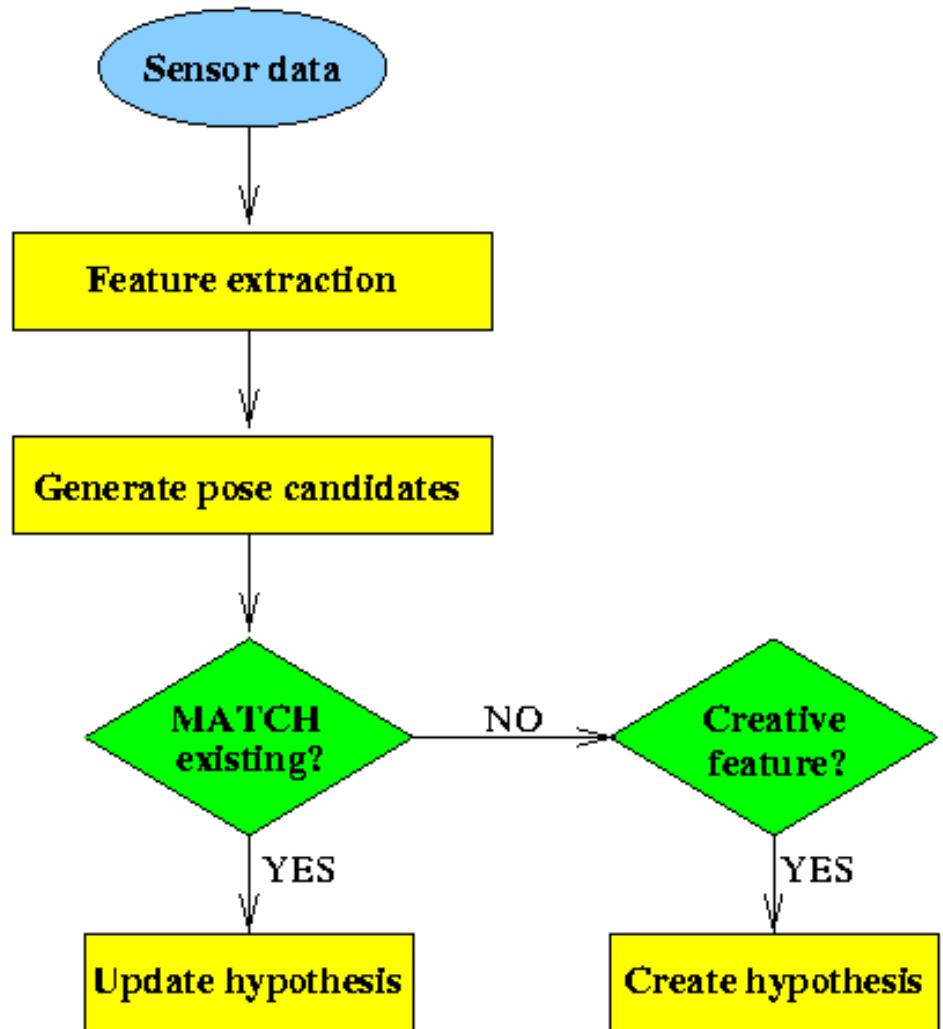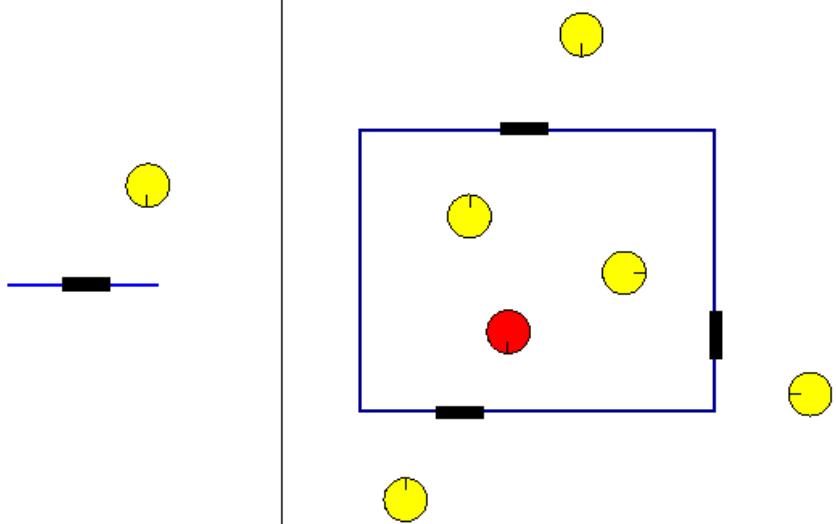


MHT: Implemented System (3)

Example run

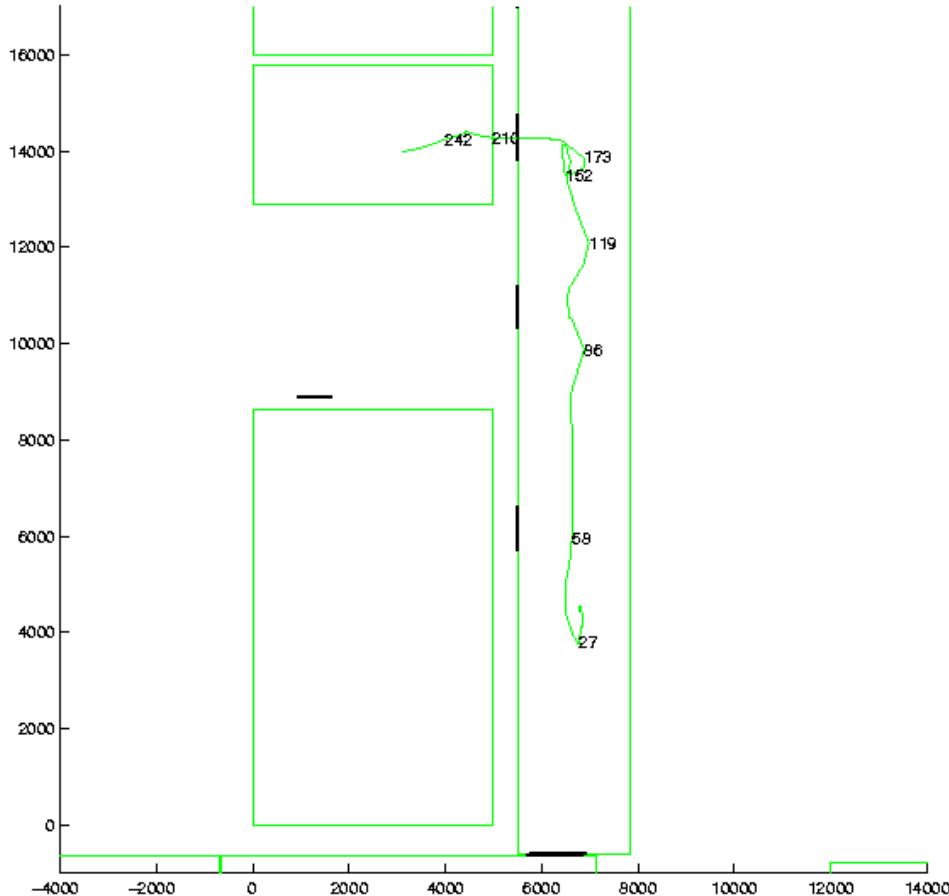

Map and trajectory

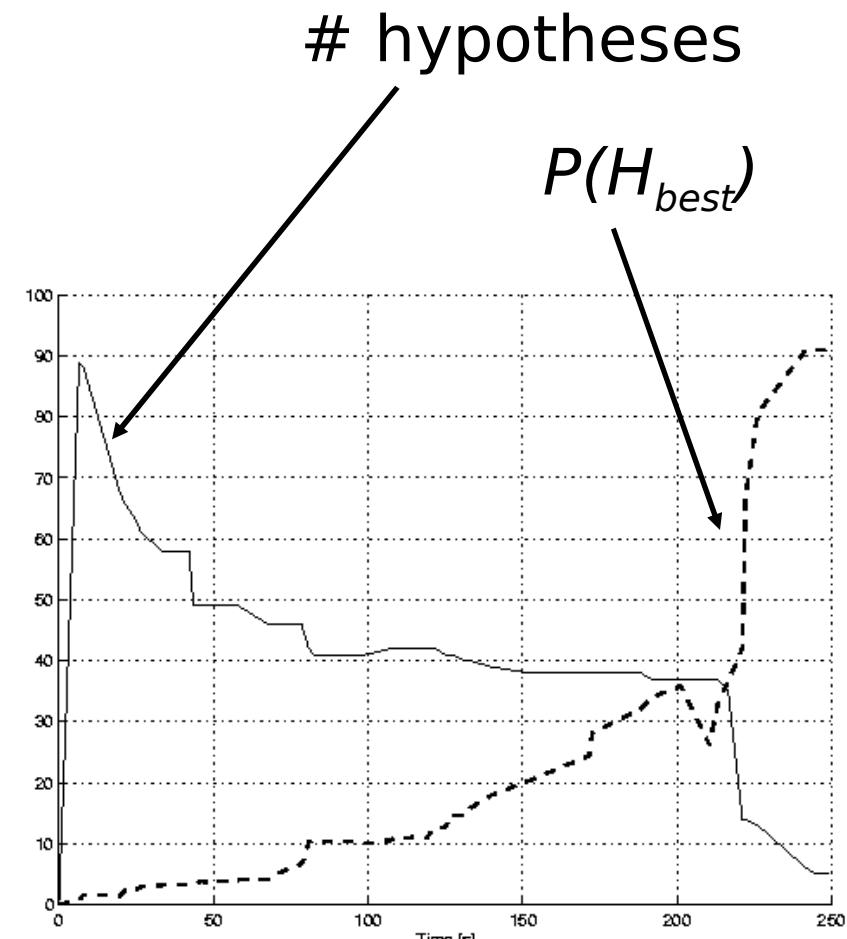

#hypotheses vs. time