

Parametric surfaces





Reading

- Required:

- Watt, 2.1.4, 3.4-3.5.


- Optional

- Watt, 3.6.
- Bartels, Beatty, and Barsky. *An Introduction to Splines for use in Computer Graphics and Geometric Modeling*, 1987.



Mathematical surface representations

- ◆ Explicit $z = f(x,y)$ (a.k.a., a “height field”)
 - what if the curve isn’t a function, like a sphere?



- ◆ Implicit $g(x,y,z) = 0$


- ◆ Parametric $S(u,v) = (x(u,v), y(u,v), z(u,v))$

- For the sphere:

$$x(u,v) = r \cos 2\pi v \sin \pi u$$

$$y(u,v) = r \sin 2\pi v \sin \pi u$$



$$z(u,v) = r \cos \pi u$$



As with curves, we’ll focus on parametric surfaces.



Surfaces of revolution

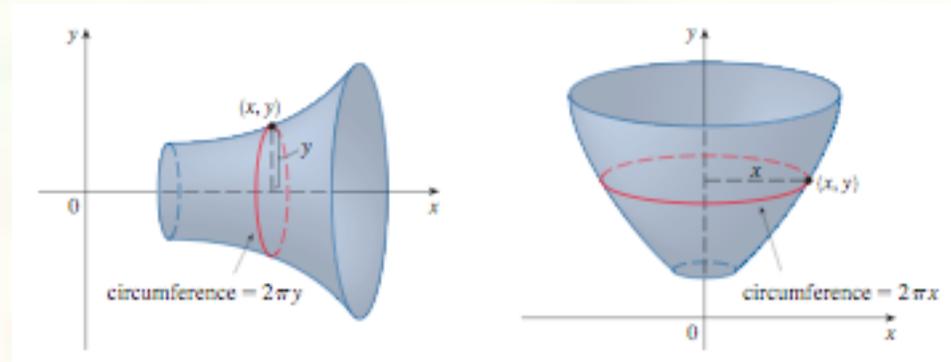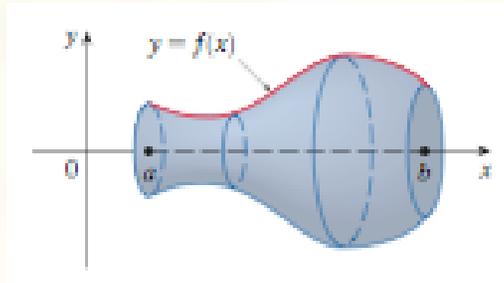

- Idea: rotate a 2D **profile curve** around an axis.
- What kinds of shapes can you model this way?
- **Find:** A surface $S(u, v)$ which is radius(z) rotated about the z axis.
- **Solution:** $x = \text{radius}(u) \cos(v)$
 $y = \text{radius}(u) \sin(v)$
 $z = u$ $u \in [z_{\min}, z_{\max}]$, $v \in [0, 2\pi]$



Extruded surfaces

- **Given:** A curve $C(u)$ in the xy -plane:

$$C(u) = \begin{bmatrix} c_x(u) \\ c_y(u) \\ 0 \\ 1 \end{bmatrix}$$

- **Find:** A surface $S(u,v)$ which is $C(u)$ extruded along the z axis.
- **Solution:**

$$x = c_x(u)$$


$$y = c_y(u) \quad u \in [u_{\min}, u_{\max}], \quad v \in [z_{\min}, z_{\max}]$$

$$z = v$$



General sweep surfaces

- The **surface of revolution** is a special case of a **swept surface**.
- Idea: Trace out surface $S(u,v)$ by moving a **profile curve** $C(u)$ along a **trajectory curve** $T(v)$.

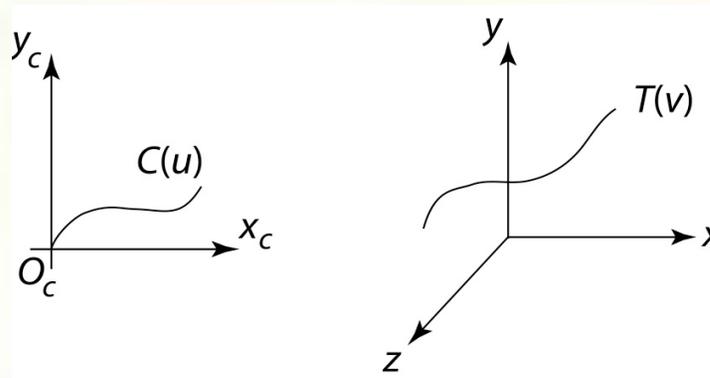


- More specifically:
 - Suppose that $C(u)$ lies in an (x_c, y_c) coordinate system with origin O_c .
 - For every point along $T(v)$, lay $C(u)$ so that O_c coincides with $T(v)$.



Orientation

- The big issue:
 - How to orient $C(u)$ as it moves along $T(v)$?
- Here are two options:
 1. **Fixed** (or **static**): Just translate O_c along $T(v)$.

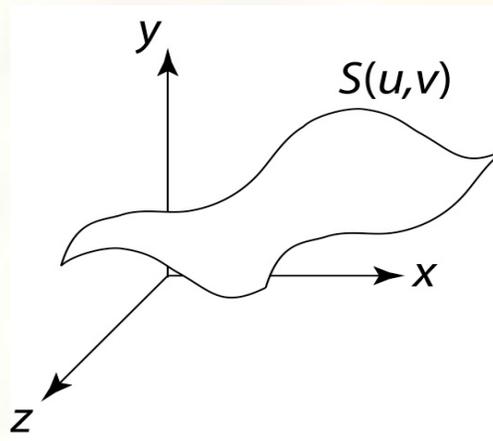


2. **Moving**. Use the **Frenet frame** of $T(v)$.
 - Allows smoothly varying orientation.
 - Permits surfaces of revolution, for example.



Frenet frames

- Motivation: Given a curve $T(v)$, we want to attach a smoothly varying coordinate system.

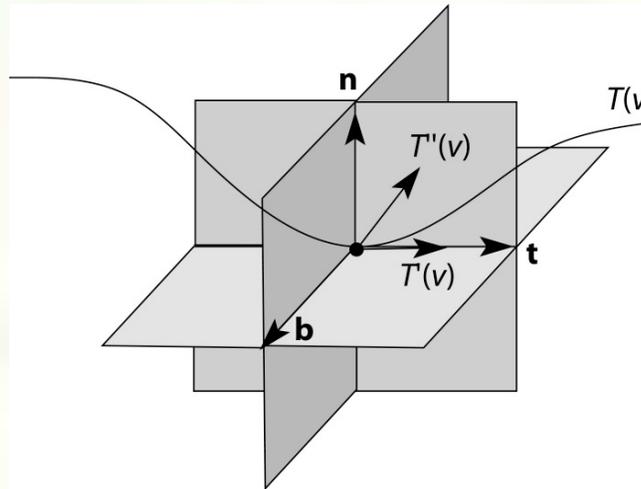

- To get a 3D coordinate system, we need 3 independent direction vectors.

$$\mathbf{t}(v) = \text{normalize}[T'(v)]$$

$$\mathbf{b}(v) = \text{normalize}[T'(v) \times T''(v)]$$


$$\mathbf{n}(v) = \mathbf{b}(v) \times \mathbf{t}(v)$$

- As we move along $T(v)$, the Frenet frame $(\mathbf{t}, \mathbf{b}, \mathbf{n})$ varies smoothly.



Frenet swept surfaces

- Orient the profile curve $C(u)$ using the Frenet frame of the trajectory $T(v)$:
 - Put $C(u)$ in the **normal plane** .
 - Place O_c on $T(v)$.
 - Align x_c for $C(u)$ with \mathbf{b} .
 - Align y_c for $C(u)$ with $-\mathbf{n}$.


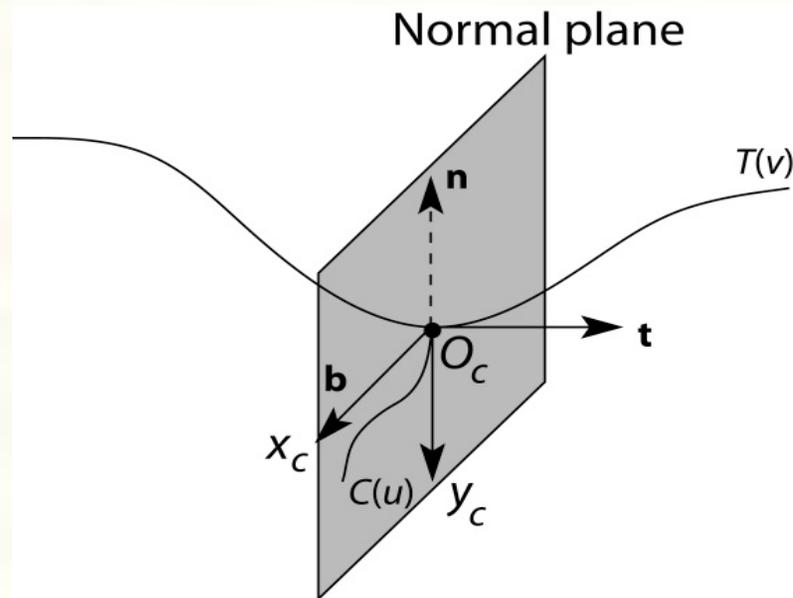


- If $T(v)$ is a circle, you get a surface of revolution exactly!
- What happens at inflection points, i.e., where curvature goes to zero?



Variations

- Several variations are possible:
 - Scale $C(u)$ as it moves, possibly using length of $T(v)$ as a scale factor.
 - Morph $C(u)$ into some other curve $\bar{C}(u)$ as it moves along $T(v)$.
 - ...

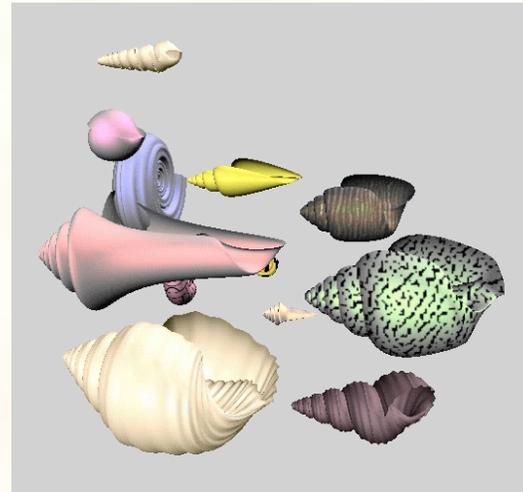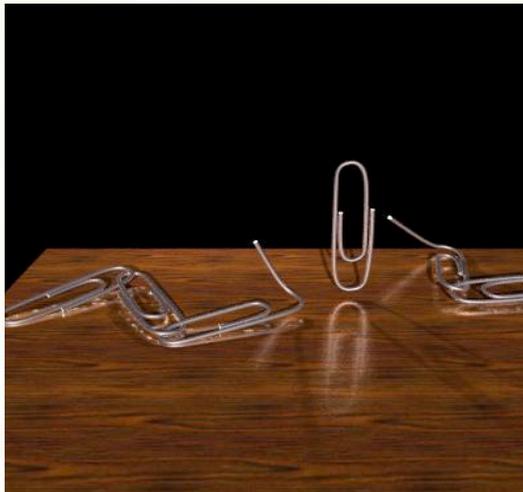



Generalizing from Parametric Curves

- Flashback to curves:


We directly defined parametric function $f(u)$, as a cubic polynomial.

- Why a cubic polynomial?

- minimum degree for C^2 continuity
- “well behaved”

- Can we do something similar for surfaces?


Initially, just think of a height field: height = $f(u,v)$.

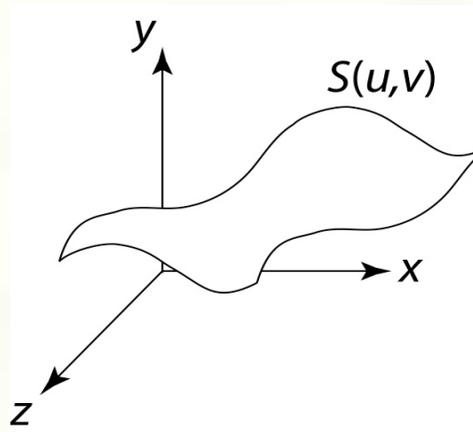



Cubic patches

Cubic curves are good... Let's extend them in the obvious way to surfaces:

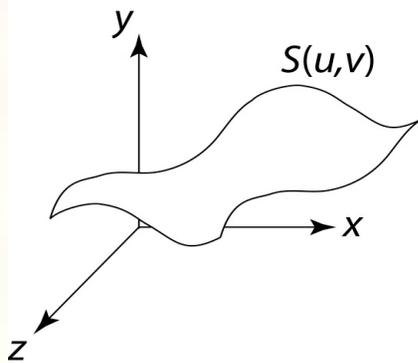

$$f(u) = 1 + u + u^2 + u^3$$

$$g(v) = 1 + v + v^2 + v^3$$

$$f(u)g(v) = 1 + u + v + uv + u^2 + v^2 + uv^2 + vu^2 + \dots + u^3v^3$$

16 terms in this function.

Let's allow the user to pick the coefficient for each of them:

$$f(u)g(v) = c_0 + c_1u + c_2v + \dots + c_{15}u^3v^3$$



Interesting properties

$$f(u, v) = c_0 + c_1u + c_2v + \dots + c_{15}u^3v^3$$

What happens if I pick a particular ‘ u ’?

$$f(u, v) =$$

What happens if I pick a particular ‘ v ’?


$$f(u, v) =$$

What do these look like graphically on a patch?



Use control points


- As before, directly manipulating coefficients is not intuitive.
 - Instead, directly manipulate control points.
 - These control points indirectly set the coefficients, using approaches like those we used for curves.

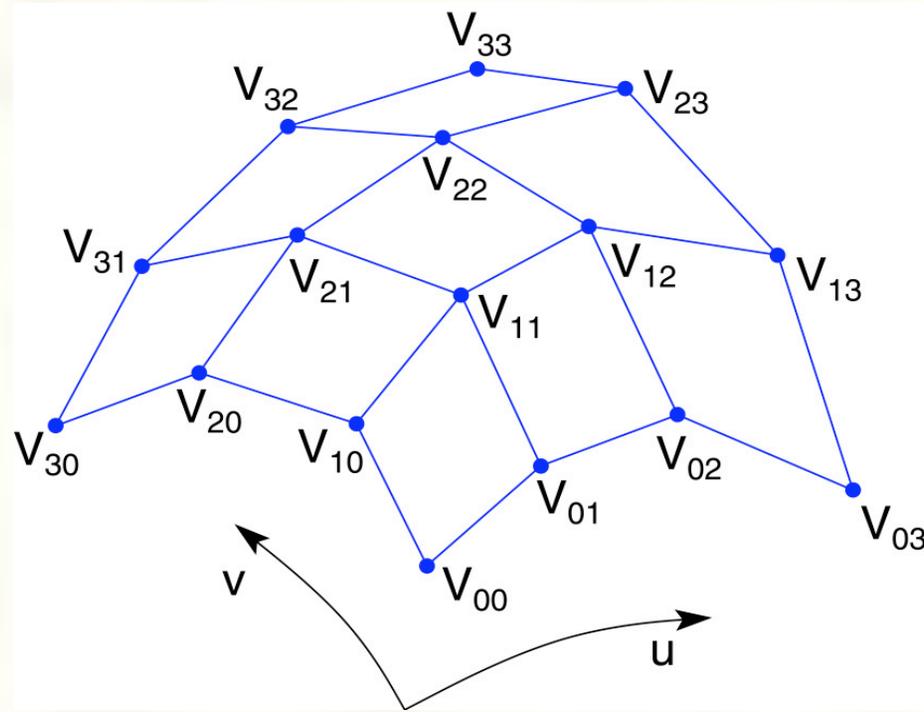



Tensor product Bézier surface

- Let's walk through the steps:

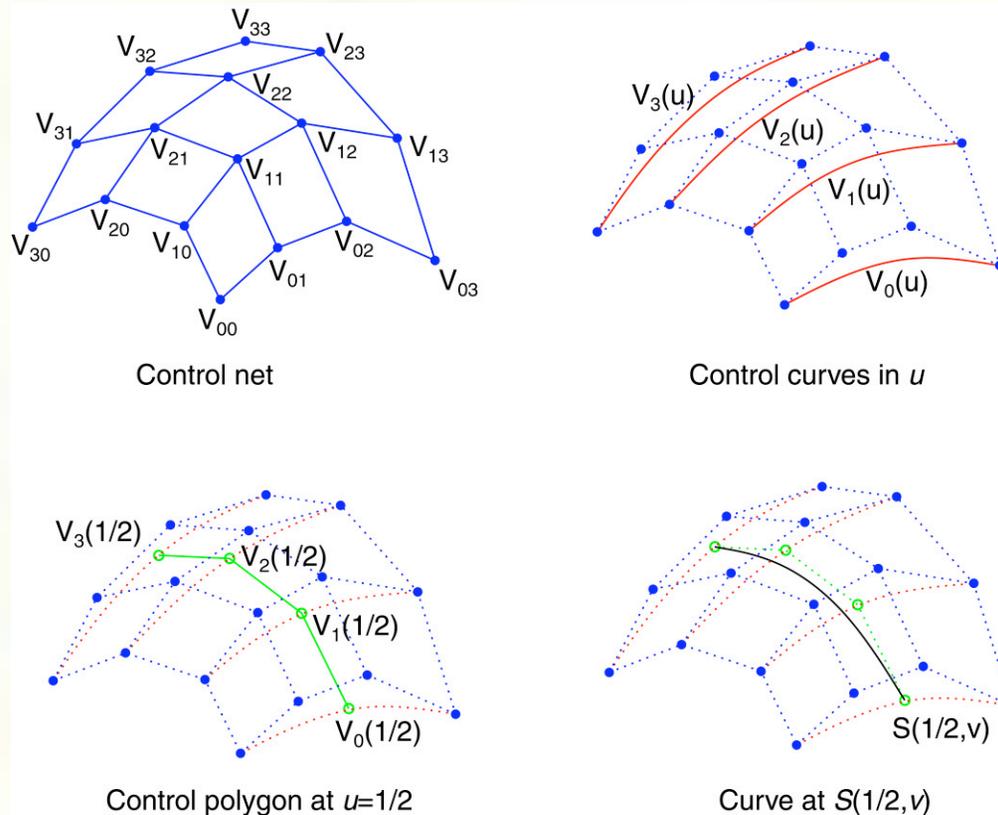

- Which control points are interpolated by the surface?



Matrix form of Bézier surfaces

- Recall that Bézier curves can be written in terms of the Bernstein polynomials:

$$\mathbf{p}(u) = \sum_{i=0}^n B_{i,n}(u) \mathbf{p}_i$$

- They can also be written in a matrix form:

$$\mathbf{p}(u) = \begin{bmatrix} u^3 & u^2 & u & 1 \end{bmatrix} \begin{bmatrix} -1 & 3 & -3 & 1 \\ 3 & -6 & 3 & 0 \\ -3 & 3 & 0 & 0 \\ 1 & 0 & 0 & 0 \end{bmatrix} \begin{bmatrix} \mathbf{p}_0 \\ \mathbf{p}_1 \\ \mathbf{p}_2 \\ \mathbf{p}_3 \end{bmatrix} = \mathbf{U} \mathbf{M}_B \mathbf{P}$$


- Tensor product surfaces can be written out similarly:

$$\begin{aligned} \mathbf{p}(u,v) &= \sum_{i=0}^n \sum_{j=0}^n B_{i,n}(u) B_{j,n}(v) \mathbf{p}_{i,j} \\ &= \mathbf{U} \mathbf{M}_B \mathbf{P}_s \mathbf{M}_B^T \mathbf{V}^T \end{aligned}$$



Tensor product B-spline surfaces





- As with spline curves, we can piece together a sequence of Bézier surfaces to make a spline surface. If we enforce C^2 continuity and local control, we get B-spline curves:

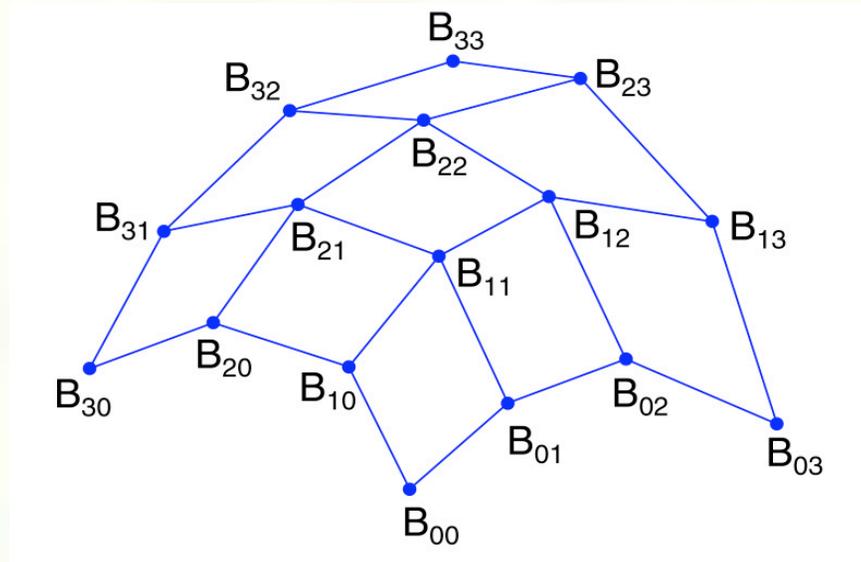

- treat rows of B as control points to generate Bézier control points in u .
- treat Bézier control points in u as B-spline control points in v .
- treat B-spline control points in v to generate Bézier control points in u .



Tensor product B-spline surfaces

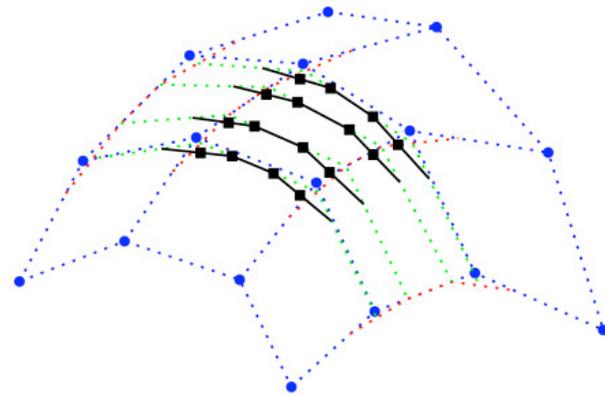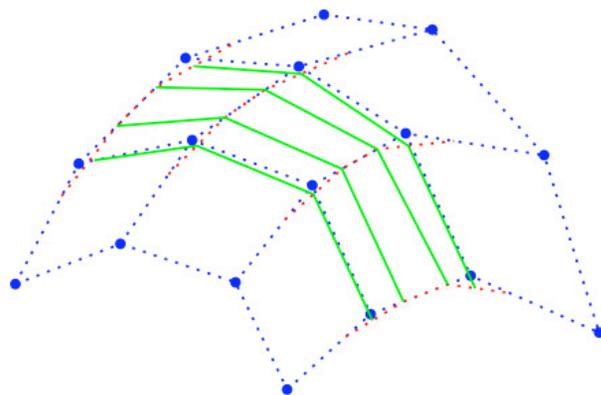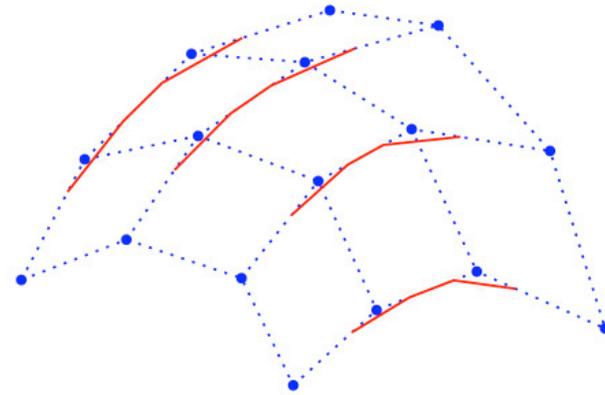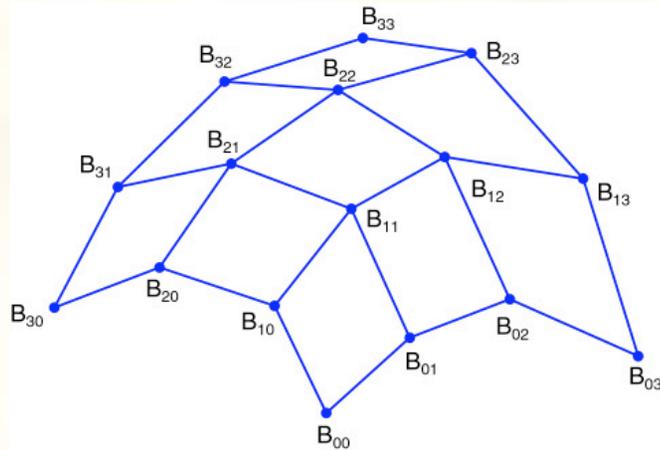


Which B-spline control points are interpolated by the surface?



Continuity for surfaces

Continuity is more complex for surfaces than curves. Must examine partial derivatives at patch boundaries.


G^1 continuity refers to tangent plane.

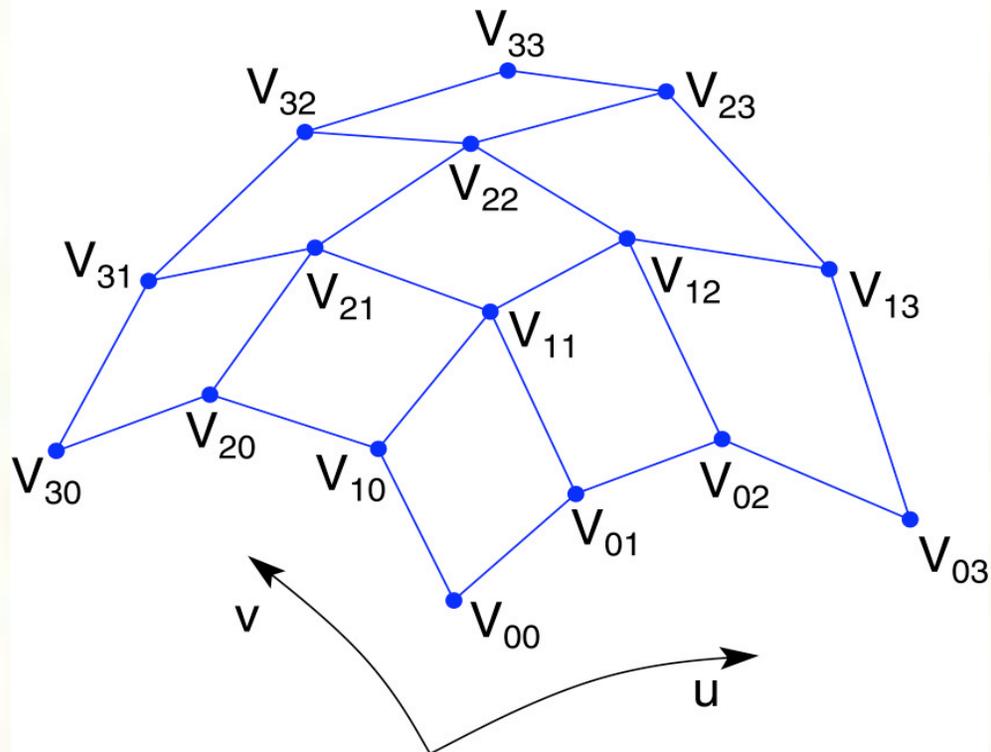



Trimmed NURBS surfaces

- Uniform B-spline surfaces are a special case of NURBS surfaces.
- Sometimes, we want to have control over which parts of a NURBS surface get drawn.
- For example:

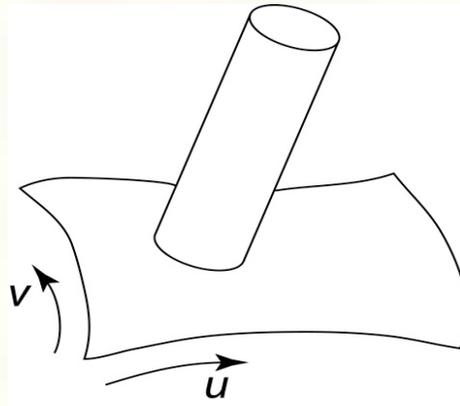

- We can do this by **trimming** the u - v domain.
 - Define a closed curve in the u - v domain (a **trim curve**)
 - Do not draw the surface points inside of this curve.
- It's really hard to maintain continuity in these regions, especially while animating.



Next class: Subdivision surfaces

■ **Topic:**

How do we extend ideas from subdivision curves to the problem of representing surfaces?

■ **Recommended Reading:**

- Stollnitz, DeRose, and Salesin. Wavelets for Computer Graphics: Theory and Applications, 1996, section 10.2.
[Course reader pp. 262-268]