# Topic 13 Recursive Backtracking





Problem space consists of states (nodes) and actions (paths that lead to new states). When in a node can can only see paths to connected nodes

If a node only leads to failure go back to its "parent" node. Try other alternatives. If these all lead to failure then more backtracking may be necessary.

CS314

Recursive Backtracking

2

# Escaping a Maze

- Which door should we take?
- A view from above


Current

Exit out there, some where ... we hope

CS314 Recursive Backtracking

# Escaping a Maze


Try door to the east





Exit out there, some where ... we hope


3


CS314 Recursive Backtracking

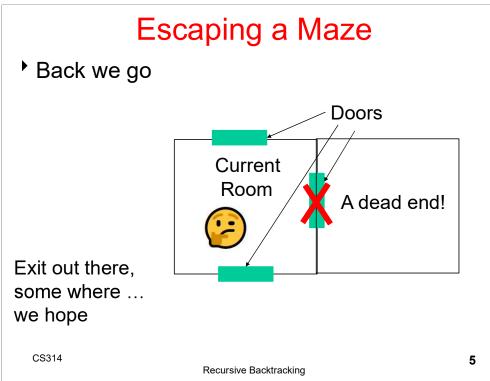


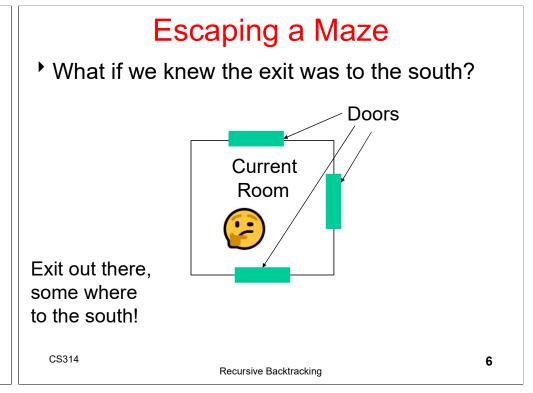


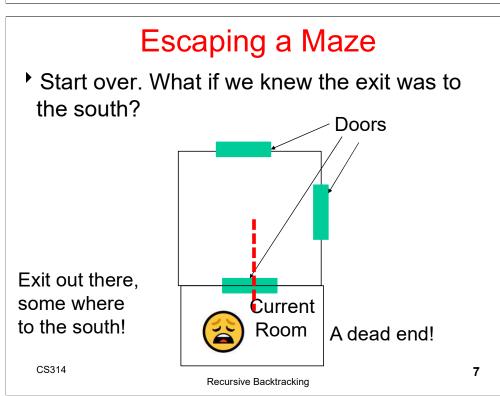


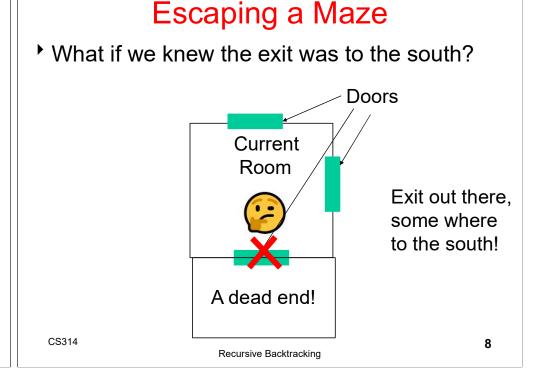


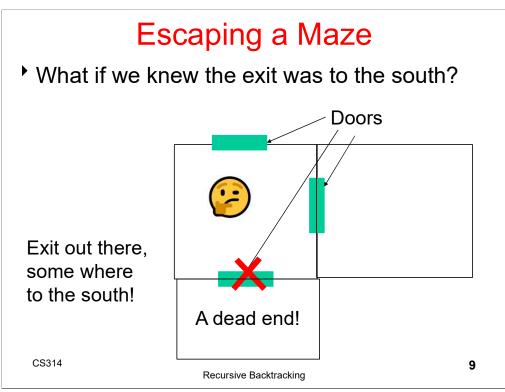


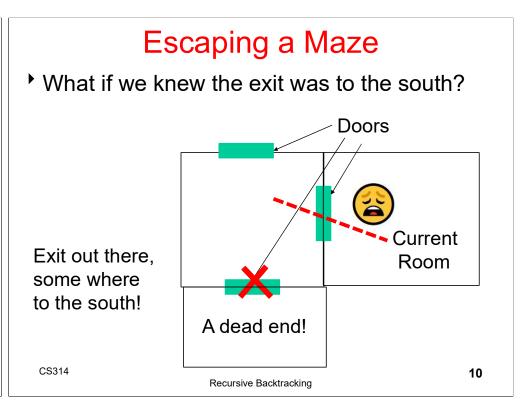

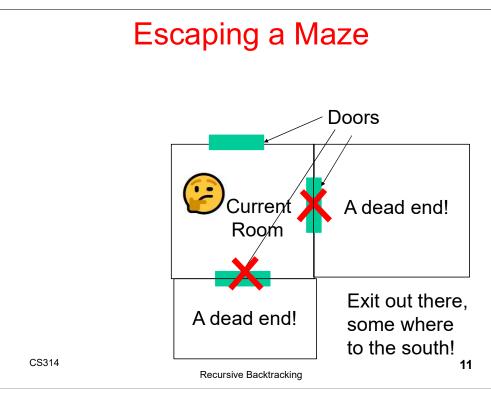

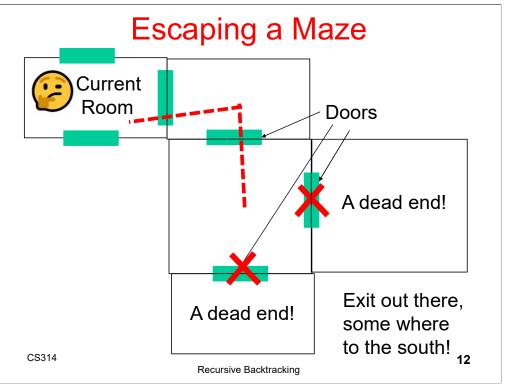

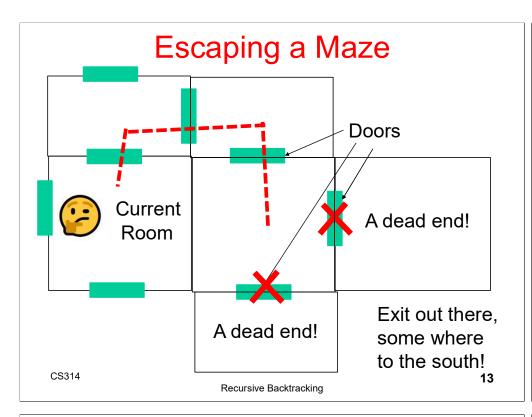

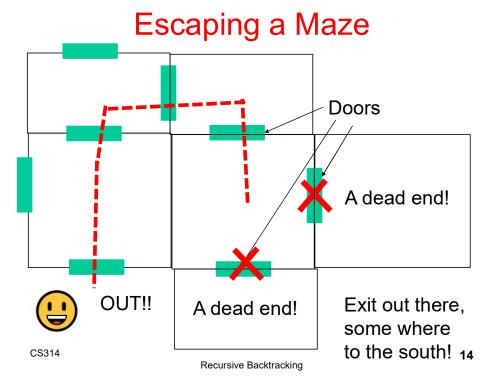

# **Recursive Backtracking**

Pseudo code for recursive backtracking algorithms – looking for **a** solution

If at a solution, report success for (every possible choice from current state)

Make that choice and take one step along path
Use recursion to try to solve the problem for the new state

If the recursive call succeeds, report the success to the previous level

<u>Otherwise</u> Back out of the current choice to restore the state at the start of the loop.

Report failure

## **Another Concrete Example**

- Sudoku
- 9 by 9 matrix with some numbers filled in
- all numbers must be between 1 and 9
- → Goal: Each row, each column, and each mini matrix must contain the numbers between 1 and 9 once each
  - no duplicates in rows, columns, or mini matrices

5	3			7				
6			1	9	5			
	9	8					6	
8				6				3
4			8		3			1
7				2				6
	6					2	8	
			4	1	9			5
				8			7	9

CS314

Recursive Backtracking

CS314

15

Recursive Backtracking

## Solving Sudoku – Brute Force

- A <u>brute force</u> algorithm is a simple but generally inefficient approach
- Try all combinations until you find one that works
- This approach isn't clever, but computers are fast
- Then try and improve on the brute force results

5	3			7				
6			1	9	5			
	9	8					6	
8				6				3
4			8		3			1
7				2				6
	6					2	8	
			4	1	9			5
				8			7	9

#### Solving Sudoku

- Brute force Sudoku Soluton
  - if not open cells, solved
  - scan cells from left to right, top to bottom for first open cell
  - When an open cell is found start cycling through digits 1 to 9.
  - When a digit is placed check that the set up is legal
  - now solve the board

5	3	1		7				
6			1	9	5			
	9	8					6	
8				6				3
4			8		3			1
7				2				6
	6					2	8	
			4	1	9			5
				8			7	9


CS314 CS314 Recursive Backtracking CS314 Recursive Backtracking Recursive Backtracking

19

#### Clicker 1

- After placing a number in a cell is the remaining problem very similar to the original problem?
- A. No
- B. Yes

# Solving Sudoku – Later Steps



uh oh!

20

8


4 1 9

CS314 Recursive Backtracking

Recursive Backtracking

#### Sudoku – A Dead End

We have reached a dead end in our search.



With the current set up none of the nine digits work in the top right corner

CS314

Recursive Backtracking

#### Backing Up

- When the search reaches a dead end in <u>backs up</u> to the previous cell it was trying to fill and goes onto to the next digit
- We would back up to the cell with a 9 and that turns out to be a dead end as well so we back up again
  - so the algorithm needs to remember what digit to try next
- Now in the cell with the 8. We try and 9 and move forward again.

5	3	1	2	7	4	8	9	
6			1	9	5			
	9	8					6	
8				6				3
4			8		3			1
7				2				6
	6					2	8	
			4	1	9			5
			Г	8			7	9

5	3	1	2	7	4	9		
6			1	9	5			
	9	8					6	
8			П	6		П		3
4			8		3			1
7				2				6
	6		Г			2	8	
			4	1	9			5
			Π	8			7	9
			•				Z	2

CS314

21

23

Recursive Backtracking

# Characteristics of Brute Force and Backtracking

- Brute force algorithms are slow
- The first pass attempts typically don't employ a lot of logic
- But, brute force algorithms are fairly easy to implement as a first pass solution
  - many backtracking algorithms are brute force algorithms

# Key Insights

- After trying placing a digit in a cell we want to solve the new sudoku board
  - Isn't that a smaller (or simpler version) of the same problem we started with?!?!?!?
- After placing a number in a cell the we need to remember the next number to try in case things don't work out.
- We need to know if things worked out (found a solution) or they didn't, and if they didn't try the next number
- If we try all numbers and none of them work in our cell we need to *report back* that things didn't work

CS314 Recursive Backtracking

CS314

Recursive Backtracking

#### Clicker 2

Grace 2019 Asked: When we reach the base case in the solveSudoku method (9 x 9 board) and before we return true, how many stack frames are on the program stack of the solveSudoku method? Pick the closest answer.

A. <= 9

B. 82

C. 819

D. 981

E. cannot determine

Recursive Backtracking

- Problems such as Suduko can be solved using recursive backtracking
- recursive because later versions of the problem are just slightly simpler versions of the original
- backtracking because we may have to try different alternatives

CS314

Recursive Backtracking

#### Recursive Backtracking - Repeated

Pseudo code for recursive backtracking algorithms – looking for *a* solution

If at a solution, report success for (every possible choice from current state)

Make that choice and take one step along path
Use recursion to try to solve the problem for the new state


If the recursive call succeeds, report the success to the previous level

<u>Otherwise</u> Back out of the current choice to restore the state at the start of the loop.

Report failure

## **Goals of Backtracking**

- Possible goals
  - Find a path to success
  - Find all paths to success
  - Find the best path to success
- Not all problems are exactly alike, and finding one success node may not be the end of the search

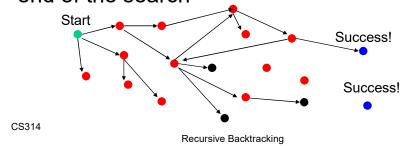

CS314

27

25

Recursive Backtracking

28



#### The 8 N Queens Problem






CS314 Recursive Backtracking

#### The 8 Queens Problem

- A classic chess puzzle
  - Place 8 queen pieces on a chess board so that none of them can attack one another

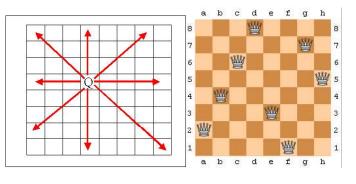



CANADA SONGE PROFESSOR LAYTON

CS314

Recursive Backtracking

#### The N Queens Problem

- Place N Queens on an N by N chessboard so that none of them can attack each other
- Number of possible placements?
- In 8 x 8

$$\binom{n}{k} = \frac{n \cdot (n-1) \cdots (n-k+1)}{k \cdot (k-1) \cdots 1} = \frac{n!}{k!(n-k)!} \quad \text{if } 0 \le k \le n$$
 (1)

n choose k

- How many ways can you choose k things from a set of n items?
- In this case there are 64 squares and we want to choose 8 of them to put queens on

#### Clicker 3

- For a safe solution, how many queens can be placed in a given column?
- A. 0
- B. 1
- C. 2
- D. 3

CS314

E. Any number

## Reducing the Search Space

Q

Q

Q


Q

The previous calculation includes set ups like this one

- Includes lots of set ups with multiple queens in the same column
- How many queens can there be in one column?
- Number of set ups 8 \* 8 \* 8 \* 8 \* 8 \* 8 \* 8 \* 8 = 16,777,216
- We have reduced search space by two orders of magnitude by applying some logic

CS314 Recursive Backtracking

## Solving N Queens Approach



#### A Solution to 8 Queens

If number of queens is fixed and I realize there can't be more than one queen per column I can iterate through the rows for each column

```
for (int r0 = 0; r0 < 8; r0++) {
       board[r0][0] = 'q';
        for (int r1 = 0; r1 < 8; r1++) {
              board[r1][1] = 'q';
              for (int r2 = 0; r2 < 8; r2++) {
                     board[r2][2] = 'q';
                     // a little later
                     for (int r7 = 0; r7 < 8; r7++) {
                            board[r7][7] = 'q';
                            if( queensAreSafe(board) )
                                   printSolution(board);
                            board[r7][7] = ' '; //pick up queen
                     board[r6][6] = ' '; // pick up queen
 CS314
                                                               35
                          Recursive Backtracking
```

#### N Queens

34

- The *problem* with N queens is you don't know how many for loops to write.
- Do the problem recursively

CS314

- Write recursive code with class and demo
  - show backtracking with breakpoint and debugging option

CS314 Recursive Backtracking

## **Recursive Backtracking**

- You must practice!!!
- Learn to recognize problems that fit the pattern
- Is a *kickoff* method needed?
- All solutions or a solution?
- Reporting results and acting on results

Minesweeper

Whinesweeper

Game Help

Winesweeper

Game Help


Game

CS314 Recursive Backtracking 37

# Minesweeper Reveal Algorithm

- Minesweeper
- click a cell
  - if bomb game over
  - if cell that has 1 or more bombs on border then reveal the number of bombs that border cell
  - if a cell that has 0 bombs on border then reveal that cell as a blank and click on the 8 surrounding cells

# Another Backtracking Problem A Simple Maze



Search maze until way out is found. If no way out possible report that.

CS314 Recursive Backtracking

CS314

Recursive Backtracking

# Which way do I go to get out? North West Behind me, to the South is a door leading South Recursive Backtracking

# Modified Backtracking Algorithm for Maze

If the current square is outside, return TRUE to indicate that a solution has been found.

If the current square is marked, return FALSE to indicate that this path has been tried.

```
Mark the current square.
```

```
for (each of the four compass directions)
```

```
if (this direction is not blocked by a wall)
```

Move one step in the indicated direction from the current square.

Try to solve the maze from there by making a recursive call.

If this call shows the maze to be solvable, return TRUE to indicate that fact.

Ta

}

Unmark the current square.

Return FALSE to indicate that none of the four directions led to a solution.


CS314

41

Recursive Backtracking

42

# **Backtracking in Action**




The crucial part of the algorithm is the for loop that takes us through the alternatives from the current square. Here we have moved to the North.

Recursive Backtracking

43


# Backtracking in Action



Here we have moved North again, but there is a wall to the North. East is also blocked, so we try South. That call discovers that the square is marked, so it just returns.

CS314

Recursive Backtracking



So the next move we can make is West.

Where is this leading?

This path reaches a dead end.

Time to backtrack!

Remember the program stack!

Recursive Backtracking


CS314

45

Recursive Backtracking

Recursive Backtracking


The recursive calls end and return until we find ourselves back here.



And now we try
South

48

#### Path Eventually Found



More Backtracking Problems

CS314 Recursive Backtracking

#### Other Backtracking Problems

Knight's Tour

CS314

- Regular Expressions
- Knapsack problem / Exhaustive Search
  - Filling a knapsack. Given a choice of items with various weights and a limited carrying capacity find the optimal load out. 50 lb. knapsack. items are 1 40 lb, 1 32 lb. 2 22 lbs, 1 15 lb, 1 5 lb. A greedy algorithm would choose the 40 lb item first. Then the 5 lb. Load out = 45lb. Exhaustive search 22 + 22 + 5 = 49.

#### The CD problem

We want to put songs on a Compact Disc.
 650MB CD and a bunch of songs of various sizes.

```
If there are no more songs to consider return result
else{
    Consider the next song in the list.
    Try not adding it to the CD so far and use recursion to evaluate best without it.
    Try adding it to the CD, and use recursion to evaluate best with it Whichever is better is returned as absolute best from here
}
```

CS314

51

CS314

49

#### **Another Backtracking Problem**

- Airlines give out frequent flier miles as a way to get people to always fly on their airline.
- Airlines also have partner airlines. Assume if you have miles on one airline you can redeem those miles on any of its partners.
- Further assume if you can redeem miles on a partner airline you can redeem miles on any of its partners and so forth...
  - Airlines don't usually allow this sort of thing.
- Given a list of airlines and each airlines partners determine if it is possible to redeem miles on a given airline A on another airline B.

CS314 Recursive Backtracking

53

55

Recursive Backtracking

#### Airline List – Part 1

Delta

- partners: Air Canada, Aero Mexico, OceanAir

United

- partners: Aria, Lufthansa, OceanAir, Quantas, British Airways

Northwest

- partners: Air Alaska, BMI, Avolar, EVA Air

Canjet

- partners: Girjet

Air Canda

- partners: Areo Mexico, Delta, Air Alaska

Aero Mexico

- partners: Delta, Air Canda, British Airways

#### Airline List - Part 2

- Ocean Air
  - partners: Delta, United, Quantas, Avolar
- AlohaAir
  - partners: Quantas
- Aria
  - partners: United, Lufthansa
- Lufthansa
  - partners: United, Aria, EVA Air
- Quantas
  - partners: United, OceanAir, AlohaAir
- ▶ BMI
  - partners: Northwest, Avolar
- Maxair
  - partners: Southwest, Girjet

#### Airline List - Part 3

Girjet

CS314


- partners: Southwest, Canjet, Maxair
- British Airways
  - partners: United, Aero Mexico
- Air Alaska
  - partners: Northwest, Air Canada
- Avolar
  - partners: Northwest, Ocean Air, BMI
- EVA Air
  - partners: Northwest, Luftansa
- Southwest
  - partners: Girjet, Maxair

CS314 Recursive Backtracking

CS314 Recursive Backtracking

56

# **Problem Example**

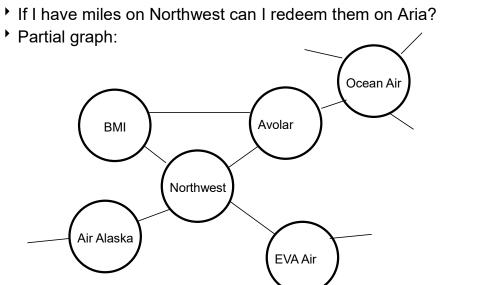

Recursive Backtracking

57

CS314