

iOS Mobile Development



Today

🕒 More Objective-C

Creating objects

`nil`

The very important type `id` (and the concept of “dynamic binding”)

Introspection

Demo (improving `match:` with introspection)

🕒 Foundation

`NSObject`, `NSArray`, `NSNumber`, `NSData`, `NSDictionary`, et.

al. `Property Lists` and `NSUserDefaults`

`NSRange`

`UIFont` and `UIColor` (not actually Foundation, they’re in

UIKit) `NSAttributedString` (and its UIKit extensions)

Attributed strings in `UITextView` and `UILabel`

Creating Objects

- Most of the time, we create objects with `alloc` and `init...`

```
NSMutableArray *cards = [[NSMutableArray alloc] init];  
CardMatchingGame *game = [[CardMatchingGame alloc] initWithCardCount:12 usingDeck:d];
```

- Or with class methods

```
NSString's + (id)stringWithFormat:(NSString *)format, ...  
NSString *moltuae = [NSString stringWithFormat:@"%d", 42];  
UIButton's + (id)buttonWithType:(UIButtonType)buttonType;  
NSMutableArray's + (id)arrayWithCapacity:(int)count;  
NSArray's + (id)arrayWithObject:(id)anObject;
```

- Sometimes both a class creator method and `init` method exist

```
[NSString stringWithFormat:...] same as [[NSString alloc] initWithFormat:...]
```

Don't be disturbed by this. Using either version is fine.

iOS seems to be moving more toward the `alloc/init` versions with new API, but is mostly neutral.

Creating Objects

- ☞ You can also ask other objects to create new objects for you

NSString's – (NSString *)stringByAppendingString:(NSString *)otherString;

NSArray's – (NSString *)componentsJoinedByString:(NSString *)separator;

NSString's & NSArray's – (id)mutableCopy;

- ☞ But not all objects given out by other objects are newly created

NSArray's – (id)lastObject;

NSArray's – (id)objectAtIndex:(int)index;

Unless the method has the word “copy” in it, if the object already exists, you get a pointer to it. If the object does not already exist (like the first 2 examples at the top), then you're creating.

nil

④ Sending messages to `nil` is (mostly) okay. No code executed.

If the method returns a value, it will return zero.

```
int i = [obj methodWhichReturnsAnInt]; // i will be zero if obj is nil
```

It is absolutely fine to depend on this and write code that uses this (don't get too cute, though).

But be careful if the method returns a C struct. Return value is undefined.

```
CGPoint p = [obj getLocation]; //p will have an undefined value if obj is nil
```

Dynamic Binding

Objective-C has an important type called `id`

It means “pointer to an object of unknown/unspecified” type.

```
id myObject;
```

Really all object pointers (e.g. `NSString *`) are treated like `id` at runtime.

But at compile time, if you type something `NSString *` instead of `id`, the compiler can help you.

It can find bugs and suggest what methods would be appropriate to send to it, etc.

If you type something using `id`, the compiler can't help very much because it doesn't know much. Figuring out the code to execute when a message is sent at runtime is called “dynamic binding.”

Is it safe?

Treating all object pointers as “pointer to unknown type” at runtime seems dangerous, right?

What stops you from sending a message to an object that it doesn't understand?

Nothing. And your program crashes if you do so. Oh my, Objective-C programs must crash a lot! Not really.

Because we mostly use static typing (e.g. `NSString *`) and the compiler is really smart.

Dynamic Binding

Static typing

```
NSString *s = @"x"; // "statically" typed (compiler will warn if s is sent non-NSString
messges). id obj = s; // not statically typed, but perfectly legal; compiler can't catch
[obj rank] NSArray *a = obj; // also legal, but obviously could lead to some big trouble!
Compiler will not complain about assignments between an id and a statically typed variable.
```

Sometimes you are silently doing this. You have already done so!

```
- (int)match:(NSArray *)otherCards
```

```
{
```

```
...
```

```
    PlayingCard *otherCard = [otherCards firstObject]; // firstObject returns id!
}
```

Never use "id *" by the way (that would mean "a pointer to a pointer to an object").

Object Typing

```
@interface Vehicle
- (void)move;
@end
@interface Ship :
Vehicle - (void)shoot;
@end

Ship *s = [[Ship alloc]
init];[s shoot];
[s move];
```

No compiler warning.
Perfectly legal since `s` "isa" `Vehicle`.
Normal object-oriented stuff here.

Object Typing

```
@interface Vehicle
- (void)move;
@end
@interface Ship :
Vehicle - (void)shoot;
@end
```

```
Ship *s = [[Ship alloc]
init];[s shoot];
[s move];
```

```
Vehicle *v = s;
```

No compiler warning.
Perfectly legal since **s** "isa" **Vehicle**.

Object Typing

```
@interface Vehicle
- (void)move;
@end
@interface Ship :
Vehicle - (void)shoot;
@end
```

```
Ship *s = [[Ship alloc]
init];[s shoot];
[s move];
```

```
Vehicle *v =
s;[v shoot];
```

Compiler warning!

Would not crash at runtime though.
But only because we know **v** is a **Ship**.
Compiler only knows **v** is a **Vehicle**.

Object Typing

```
@interface Vehicle
- (void)move;
@end
@interface Ship :
Vehicle - (void)shoot;
@end
```

```
Ship *s = [[Ship alloc]
init];[s shoot];
[s move];
```

```
Vehicle *v =
s;[v shoot];
```

```
id obj
= ...;[obj
shoot];
```

No compiler warning.

The compiler knows that the method **shoot** exists,
so it's not impossible that **obj** might respond to it.

But we have not typed **obj** enough for the compiler to be sure it's wrong.

So no warning.

Might crash at runtime if **obj** is not a **Ship**
(or an object of some other class that implements a **shoot** method).

Object Typing

```
@interface Vehicle
- (void)move;
@end
@interface Ship :
Vehicle - (void)shoot;
@end
```

```
Ship *s = [[Ship alloc]
init];[s shoot];
[s move];
```

```
Vehicle *v =
s;[v shoot];
```

```
id obj = ...;
[obj shoot];
[obj someMethodNameThatNoObjectAnywhereRespondsTo];
```

Compiler warning!

Compiler has never heard of this method.
Therefore it's pretty sure **obj** will not respond to it.

Object Typing

```
@interface Vehicle
- (void)move;
@end
@interface Ship :
Vehicle - (void)shoot;
@end
```

```
Ship *s = [[Ship alloc]
init];[s shoot];
[s move];
```

```
Vehicle *v =
s;[v shoot];
```

```
id obj = ...;
[obj shoot];
[obj someMethodNameThatNoObjectAnywhereRespondsTo];
```

```
NSString *hello =
@"hello";[hello shoot],
```

Compiler warning.

The compiler knows that **NSString** objects do not respond to **shoot**.

Guaranteed crash at runtime.

Object Typing

```
@interface Vehicle
- (void)move;
@end
@interface Ship :
Vehicle - (void)shoot;
@end

Ship *s = [[Ship alloc]
init];[s shoot];
[s move];

Vehicle *v =
s;[v shoot];

id obj = ...;
[obj shoot];
[obj someMethodNameThatNoObjectAnywhereRespondsTo];

NSString *hello = @"hello";
[hello shoot];
Ship *helloShip = (Ship *)hello;
```

No compiler warning.
We are "casting" here.
The compiler thinks we know what we're doing.

Object Typing

```
@interface Vehicle
- (void)move;
@end
@interface Ship :
Vehicle - (void)shoot;
@end

Ship *s = [[Ship alloc]
init];[s shoot];
[s move];

Vehicle *v =
s;[v shoot];

id obj = ...;
[obj shoot];
[obj someMethodNameThatNoObjectAnywhereRespondsTo];

NSString *hello = @"hello";
[hello shoot];
Ship *helloShip = (Ship
*)hello;[helloShip shoot];
```

No compiler warning!

We've forced the compiler to think that the **NSString** is a **Ship**. "All's well," the compiler thinks. Guaranteed crash at runtime.

Object Typing

```
@interface Vehicle
- (void)move;
@end
@interface Ship :
Vehicle - (void)shoot;
@end

Ship *s = [[Ship alloc]
init];[s shoot];
[s move];

Vehicle *v =
s;[v shoot];

id obj = ...;
[obj shoot];
[obj someMethodNameThatNoObjectAnywhereRespondsTo];

NSString *hello = @"hello";
[hello shoot];
Ship *helloShip = (Ship
*)hello;[helloShip shoot];
[(id)hello shoot];
```

No compiler warning!

We've forced the compiler to ignore the object type by "casting" in line. "All's well," the compiler thinks. Guaranteed crash at runtime.

Dynamic Binding

So when would we ever intentionally use this dangerous thing!

When we want to mix objects of different classes in a collection (e.g. in an NSArray).

When we want to support the “blind, structured” communication in MVC (i.e. delegation).

And there are other generic or blind communication needs.

But to make these things safer, we’re going to use two things: Introspection and Protocols.

Introspection

Asking at runtime what class an object is or what messages can be sent to it.

Protocols

A syntax that is “in between” id and static typing.

Does not specify the class of an object pointed to, but does specify what methods it implements. Example ...

```
id <UIScrollViewDelegate> scrollViewDelegate;
```

We’ll cover how to declare and use protocols next week.

Introspection

④ All objects that inherit from NSObject know these methods ...

`isKindOfClass:` returns whether an object is that kind of class (inheritance included)

`isMemberOfClass:` returns whether an object is that kind of class (no inheritance)

`respondToSelector:` returns whether an object responds to a given method

It calculates the answer to these questions at runtime (i.e. at the instant you send them).

④ Arguments to these methods are a little tricky

Class testing methods take a `Class`

You get a `Class` by sending the class method `class` to a class (not the instance method `class`).

```
if ([obj isKindOfClass:[NSString class]]) {
```

```
NSString *s = [(NSString *)obj stringByAppendingString:@"xyzy"];
```

```
}
```

Introspection

Method testing methods take a selector (SEL)

Special @selector() directive turns the name of a method into a selector

```
if ([obj respondsToSelector:@selector(shoot)]) {  
    [obj shoot];  
} else if ([obj respondsToSelector:@selector(shootAt:)]) {  
    [obj shootAt:target];  
}
```

SEL is the Objective-C "type" for a selector

```
SEL shootSelector = @selector(shoot);  
SEL shootAtSelector = @selector(shootAt:);  
SEL moveToSelector = @selector(moveTo:withPenColor:);
```

Introspection

☉ If you have a SEL, you can also ask an object to perform it ...

Using the `performSelector:` or `performSelector:withObject:` methods in `NSObject`

```
[obj performSelector:shootSelector];
```

```
[obj performSelector:shootAtSelector withObject:coordinate];
```

Using `makeObjectsPerformSelector:` methods in `NSArray`

```
[array makeObjectsPerformSelector:shootSelector]; // cool, huh?
```

```
[array makeObjectsPerformSelector:shootAtSelector withObject:target]; // target is an  
id
```

In `UIButton`, `- (void)addTarget:(id)anObject action:(SEL)action ...;`

```
[button addTarget:self action:@selector(digitPressed:) ...];
```

Demo

- ① How match: might be improved with introspection

Foundation Framework

🕒 NSObject

Base class for pretty much every object in the iOS SDK

Implements introspection methods discussed earlier.

– (NSString *)description is a useful method to override (it's %@ in NSLog()).

Example ... NSLog(@"array contents are %@", myArray);

The %@ is replaced with the results of invoking [myArray description].

Copying objects. This is an important concept to understand (why mutable vs. immutable?).

– (id)copy; // not all objects implement mechanism (raises exception if not)

– (id)mutableCopy; // not all objects implement mechanism (raises exception if not) It's

not uncommon to have an array or dictionary and make a mutableCopy and modify that. Or

to have a mutable array or dictionary and copy it to "freeze it" and make it immutable.

Making copies of collection classes is very efficient, so don't sweat doing so.

Foundation Framework

NSArray

Ordered collection of objects.

Immutable. That's right, once you create the array, you cannot add or remove objects. All objects in the array are held onto strongly.

Usually created by manipulating other arrays or with @[].

You already know these key methods ...

- (NSUInteger)count;
- (id)objectAtIndex:(NSUInteger)index; // crashes if index is out of bounds; returns id!
- (id)lastObject; // returns nil (doesn't crash) if there are no objects in the array
- (id)firstObject; // returns nil (doesn't crash) if there are no objects in the array

But there are a lot of very interesting methods in this class. Examples ...

- (NSArray *)sortedArrayUsingSelector:(SEL)aSelector;
- (void)makeObjectsPerformSelector:(SEL)aSelector withObject:(id)selectorArgument;
- (NSString *)componentsJoinedByString:(NSString *)separator;

Foundation Framework

🕒 NSMutableArray

Mutable version of
NSArray.

Create with alloc/init or ...

```
+ (id)arrayWithCapacity:(NSUInteger)numItems; // numItems is a performance hint only  
+ (id)array; // [NSMutableArray array] is just like [[NSMutableArray alloc]  
init]
```

NSMutableArray inherits all of NSArray's methods.

Not just count, objectAtIndex:, etc., but also the more interesting ones mentioned last slide.

And you know that it implements these key methods as well ...

- (void)addObject:(id)object; // to the end of the array (note id is the type!)
- (void)insertObject:(id)object atIndex:(NSUInteger)index;
- (void)removeObjectAtIndex:(NSUInteger)index;

Enumeration

🕒 Looping through members of an array in an efficient manner

Language support using `for-in`.

Example: NSArray of NSString

objects

```
NSArray *myArray = ...;
for (NSString *string in myArray) { // no way for compiler to know what myArray contains
    double value = [string doubleValue]; // crash here if string is not an NSString
}
```

Example: NSArray of id

```
NSArray *myArray = ...;
for (id obj in myArray) {
    // do something with obj, but make sure you don't send it a message it does not respond to
    if ([obj isKindOfClass:[NSString class]]) {
        // send NSString messages to obj with no worries
    }
}
```

Foundation Framework

5 NSNumber

Object wrapper around primitive types like int, float, double, BOOL, enums, etc.

```
NSNumber *n = [NSNumber numberWithInt:36];
```

```
float f = [n floatValue]; // would return 36.0 as a float (i.e. will convert types)
```

Useful when you want to put these primitive types in a collection (e.g. NSArray or NSDictionary).

New syntax for creating an NSNumber in iOS 6: @()

```
NSNumber *three = @3;
```

```
NSNumber *underline = @(NSUnderlineStyleSingle); // enum
```

```
NSNumber *match = @[card match:@[otherCard]]; // expression that returns a primitive type
```

6 NSValue

Generic object wrapper for some non-object, non-primitive data types (i.e. C structs).

```
e.g. NSValue *edgeInsetsObject = [NSValue
```

```
valueWithUIEdgeInsets:UIEdgeInsetsMake(1,1,1,1)] Probably don't need this in this course (maybe when we start using points, sizes and rects).
```

Foundation Framework

NSData

“Bag of bits.” Used to save/restore/transmit raw data throughout the iOS SDK.

NSDate

Used to find out the time right now or to store past or future times/dates.

See also `NSCalendar`, `NSDateFormatter`, `NSDateComponents`.

If you are going to display a date in your UI, make sure you study this in detail (localization).

NSSet / NSMutableSet

Like an array, but no ordering (no `objectAtIndex:` method).

`member:` is an important method (returns an object if there is one in the set `isEqual:` to it). Can union and intersect other sets.

NSOrderedSet / NSMutableOrderedSet

Sort of a cross between `NSArray` and `NSSet`.

Objects in an ordered set are distinct. You can't put the same object in multiple times like array.

Foundation Framework

🕒 NSDictionary

Immutable collection of objects looked up by a key (simple hash table). All keys and values are held onto strongly by an NSDictionary.

Can create with this syntax: `@{ key1 : value1, key2 : value2, key3 : value3 }`

```
NSDictionary *colors = @{ @"green" : [UIColor greenColor],
                          @"blue"  : [UIColor blueColor],
                          @"red"   : [UIColor redColor] };
```

Lookup using "array like" notation ...

```
NSString *colorString = ...;
```

```
UIColor *colorObject = colors[colorString]; // works the same as objectForKey:
```

below

```
- (NSUInteger)count;
```

```
- (id)objectForKey:(id)key; // key must be copyable and implement isEqual: properly
```

NSStrings make good keys because of this.

See NSCopying protocol for more about what it takes to be a key.

Foundation Framework

④ NSMutableDictionary

Mutable version of NSDictionary.

Create using alloc/init or one of the + (id)dictionary... class methods.

In addition to all the methods inherited from NSDictionary, here are some important methods ...

- (void)setObject:(id)anObject forKey:(id)key;
- (void)removeObjectForKey:(id)key;
- (void)removeAllObjects;
- (void)addEntriesFromDictionary:(NSDictionary *)otherDictionary;

Enumeration

④ Looping through the keys or values of a dictionary

Example:

```
NSMutableDictionary *myDictionary = ...;
for (id key in myDictionary) {

    // do something with key here
    id value = [myDictionary objectForKey:key];
    // do something with value here
}
```

Property List

⑥ The term "Property List" just means a collection of collections

It's just a phrase (not a language thing). It means any graph of objects containing only: NSArray, NSDictionary, NSNumber, NSString, NSDate, NSData (or mutable subclasses thereof)

⑥ An NSArray is a Property List if all its members are too

So an NSArray of NSString is a Property List.

So is an NSArray of NSArray as long as those NSArray's members are Property Lists.

⑥ An NSDictionary is one only if all keys and values are too

An NSArray of NSDictionary's whose keys are NSStrings and values are NSNumbers is one.

⑥ Why define this term?

Because the SDK has a number of methods which operate on Property Lists.

Usually to read them from somewhere or write them out to somewhere.

~~Example~~ `writeToFile:(NSString *)path atomically:(BOOL)atom;`

This can (only) be sent to an NSArray or NSDictionary that contains only Property List objects.

Other Foundation

④ UserDefaults

Lightweight storage of Property Lists.

It's basically an NSDictionary that persists between launches of your application.

Not a full-on database, so only store small things like user preferences.

Read and write via a shared instance obtained via class method

`standardUserDefaults ...`

```
[[NSUserDefaults standardUserDefaults] setArray:rvArray forKey:@"RecentlyViewed"];
```

Sample methods:

- `(void)setDouble:(double)aDouble forKey:(NSString *)key;`
- `(NSInteger)integerForKey:(NSString *)key; // NSInteger is a typedef to 32 or 64 bit int`
- `(void)setObject:(id)obj forKey:(NSString *)key; // obj must be a Property List`
- `(NSArray *)arrayForKey:(NSString *)key; // will return nil if value for key is not NSArray`

Always remember to write the defaults out after each batch of changes!

```
[[NSUserDefaults standardUserDefaults] synchronize];
```

Other Foundation

④ NSRange

C struct (not a class)

Used to specify subranges inside strings and arrays (et. al.).

```
typedef struct {  
    NSUInteger location;  
    NSUInteger  
length; } NSRange;
```

Important location value `NSNotFound`.

```
NSString *greeting = @"hello world"; NSString *hi = @"hi";  
NSRange r = [greeting rangeOfString:hi]; // finds range of hi characters inside  
greeting if (r.location == NSNotFound) { /* couldn't find hi inside greeting */ }
```

`NSRangePointer` (just an `NSRange *` ... used as an out method parameter). There are C functions like `NSEqualRanges()`, `NSMakeRange()`, etc.

Colors

UIColor

An object representing a color.

Initializers for creating a color based on RGB, HSB and even a pattern (UIImage).

Colors can also have alpha (`UIColor *color = [otherColor colorWithAlphaComponent:0.3]`).



A handful of “standard” colors have class methods (e.g. `[UIColor greenColor]`).

A few “system” colors also have class methods (e.g. `[UIColor lightTextColor]`).

Fonts

UIFont

Fonts in iOS 7 are very important to get right.

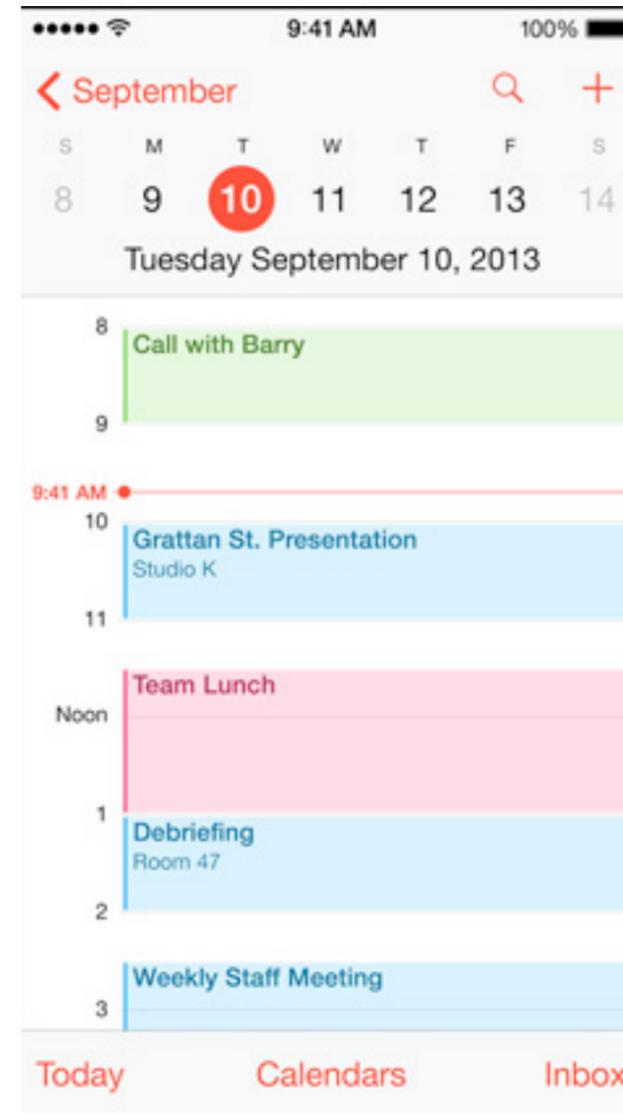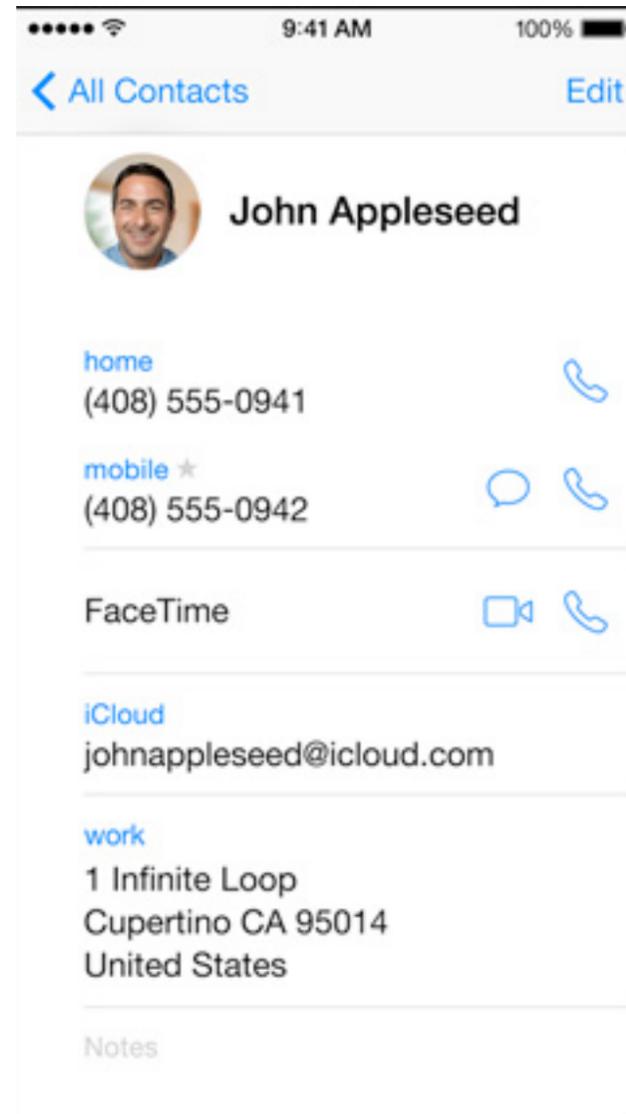

Fonts

UIFont

It is best to get a UIFont by asking for the preferred font for a given text style ...

```
UIFont *font = [UIFont preferredFontForTextStyle:UIFontTextStyleBody];
```

Some other styles (see UIFontDescriptor documentation for even more styles) ...

```
UIFontTextStyleHeadline, UIFontTextStyleCaption1, UIFontTextStyleFootnote,  
etc.
```

There are also “system” fonts.

They are used in places like button titles.

```
+ (UIFont *)systemFontOfSize:(CGFloat)pointSize;
```

```
+ (UIFont *)boldSystemFontOfSize:(CGFloat)pointSize;
```

You should never use these for your user's content. Use preferredFontForTextStyle: for that.

Fonts

UIFontDescriptor

Fonts are designed by artists.

They aren't always designed to fit any sort of categorization.

Some fonts have Narrow or Bold or Condensed faces, some do not.

Even "size" is sometimes a designed-in aspect of a particular font.

A UIFontDescriptor attempts to categorize a font anyway.

It does so by family, face, size, and other attributes.

You can then ask for fonts that have those attributes and get a "best match."

Understand that a best match for a "bold" font may not be bold if there's no such designed face.

Fonts

5 UIFontDescriptor

You can get a font descriptor from an existing UIFont with this UIFont method ...

```
- (UIFontDescriptor *)fontDescriptor;
```

You might well have gotten the original UIFont using preferredFontForTextStyle:.

Then you might modify it to create a new descriptor with methods in UIFontDescriptor like ...

```
- (UIFontDescriptor *)fontDescriptorByAddingAttributes:(NSDictionary *)attributes;
```

(the attributes and their values can be found in the class reference page for UIFontDescriptor)

You can also create a UIFontDescriptor directly from attributes (though this is rare) using ...

```
+ (UIFontDescriptor *)fontDescriptorWithFontAttributes:(NSDictionary *)attributes;
```

6 Symbolic Traits

Italic, Bold, Condensed, etc., are important enough to get their own API in UIFontDescriptor ...

```
- (UIFontDescriptorSymbolicTraits)symbolicTraits;
```

```
- (UIFontDescriptor *)fontDescriptorWithSymbolicTraits:(UIFontDescriptorSymbolicTraits)traits;
```

Some example traits (again, see UIFontDescriptor documentation for more) ...

UIFontDescriptorTraitItalic, UIFontDescriptorTraitBold, UIFontDescriptorTraitCondensed,
etc.

Fonts

UIFontDescriptor

Once you have a UIFontDescriptor that describes the font you want, use this UIFont method:

```
+ (UIFont *)fontWithDescriptor:(UIFontDescriptor *)descriptor size:(CGFloat)size;  
(specify size of 0 if you want to use whatever size is in the descriptor)
```

You will get a “best match” for your descriptor given available fonts and their faces.

Example

Let's try to get a “bold body font” ...

```
UIFont *bodyFont = [UIFont preferredFontForTextStyle:UIFontTextStyleBody];  
UIFontDescriptor *existingDescriptor = [bodyFont fontDescriptor];  
UIFontDescriptorSymbolicTraits traits = existingDescriptor.symbolicTraits;  
traits |= UIFontDescriptorTraitBold;  
UIFontDescriptor *newDescriptor = [existingDescriptor fontDescriptorWithSymbolicTraits:traits];  
UIFont *boldBodyFont = [UIFont fontWithFontDescriptor:newDescriptor size:0];
```

This will do the best it can to give you a bold version of the UIFontTextStyleBody preferred font. It may or may not actually be bold.

Attributed Strings

How text looks on screen

The font has a lot to do with how text looks on screen.

But there are other determiners (color, whether it is “outlined”, stroke width, underlining, etc.). You put the text together with a font and these other determiners using `NSAttributedString`.

`NSAttributedString`

Think of it as an `NSString` where each character has an `NSDictionary` of “attributes”.

The attributes are things like the font, the color, underlining or not, etc., of the character. It is not, however, actually a subclass of `NSString` (more on this in a moment).

Getting Attributes

You can ask an `NSAttributedString` all about the attributes at a given location in the string.

```
– (NSDictionary *)attributesAtIndex:(NSUInteger)index  
    effectiveRange:(NSRangePointer)range;
```

The range is returned and it lets you know for how many characters the attributes are identical. There are also methods to ask just about a certain attribute you might be interested in. `NSRangePointer` is essentially an `NSRange *`. It’s okay to pass `NULL` if you don’t care.

Attributed Strings

⦿ NSAttributedString is not an NSString

It does not inherit from NSString, so you cannot use NSString methods on it. If you need to operate on the characters, there is this great method in NSAttributedString: `-(NSString *)string;`

For example, to find a substring in an NSAttributedString, you could do this ...
`NSAttributedString *attributedString = ...;`
`NSString *substring = ...;`
`NSRange r = [[attributedString string] rangeOfString:substring];`

The method `string` is guaranteed to be high performance but is volatile. If you want to keep it around, make a copy of it.

Attributed Strings

🕒 NSMutableAttributedString

Unlike NSString, we almost always use mutable attributed strings.

🕒 Adding or setting attributes on the characters

You can add an attribute to a range of characters ...

– (void)addAttributes:(NSDictionary *)attributes range:(NSRange)range;
... which will change the values of attributes in attributes and not touch other attributes. Or you can set the attributes in a range ...

– (void)setAttributes:(NSDictionary *)attributes range:(NSRange)range;
... which will remove all other attributes in that range in favor of the passed attributes. You can also remove a specific attribute from a range ...

– (void)removeAttribute:(NSString *)attributeName range:(NSRange)range;

🕒 Modifying the contents of the string (changing the characters)


You can do that with methods to append, insert, delete or replace characters.

Or call the NSMutableAttributedString method – (NSMutableString *)mutableString and modify the returned NSMutableString (attributes will, incredibly, be preserved!).

Attributed Strings

So what kind of attributes are there?


```
@{ NSFontAttributeName :  
  [UIFont preferredFontWithTextStyle:UIFontTextStyleHeadline] }
```

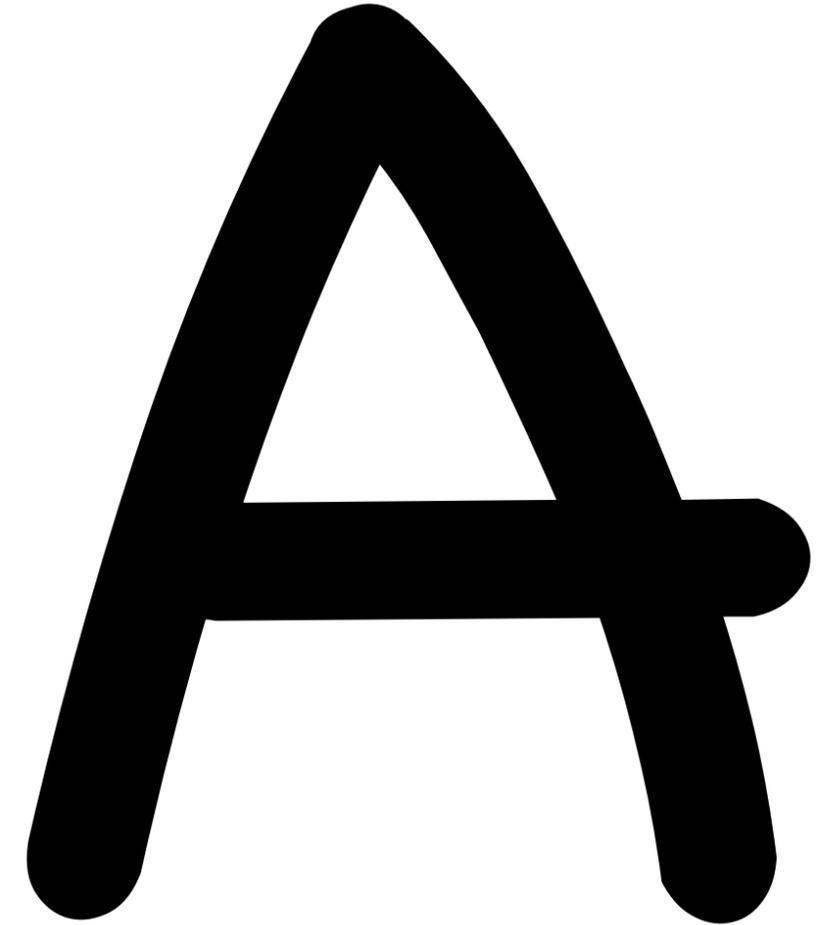

Attributed Strings

So what kind of attributes are there?

```
@{ NSFontAttributeName :  
    [UIFont preferredFontWithTextStyle:UIFontTextStyleHeadline]  
NSForegroundColorAttributeName : [UIColor blueColor] }
```

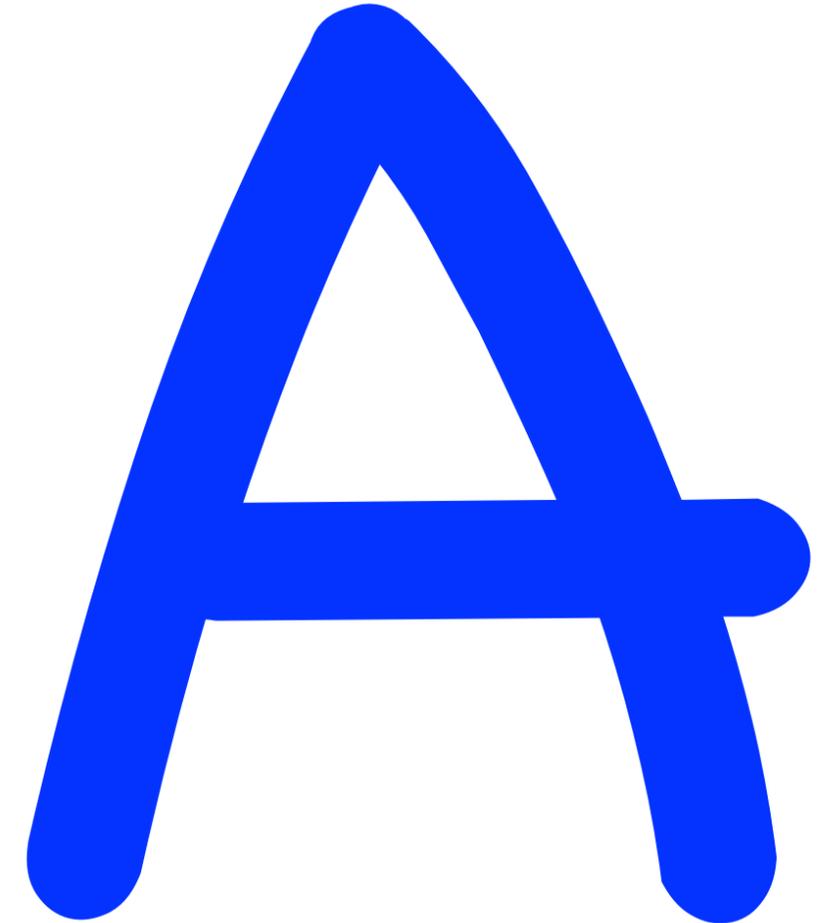


Attributed Strings

So what kind of attributes are there?

```
@{ NSFontAttributeName :  
    [UIFont preferredFontWithTextStyle:UIFontTextStyleHeadline]  
NSForegroundColorAttributeName : [UIColor greenColor] }
```

Be careful with colored text.
Color is one of the primary ways
a user knows what's "clickable."
Be Consistent.

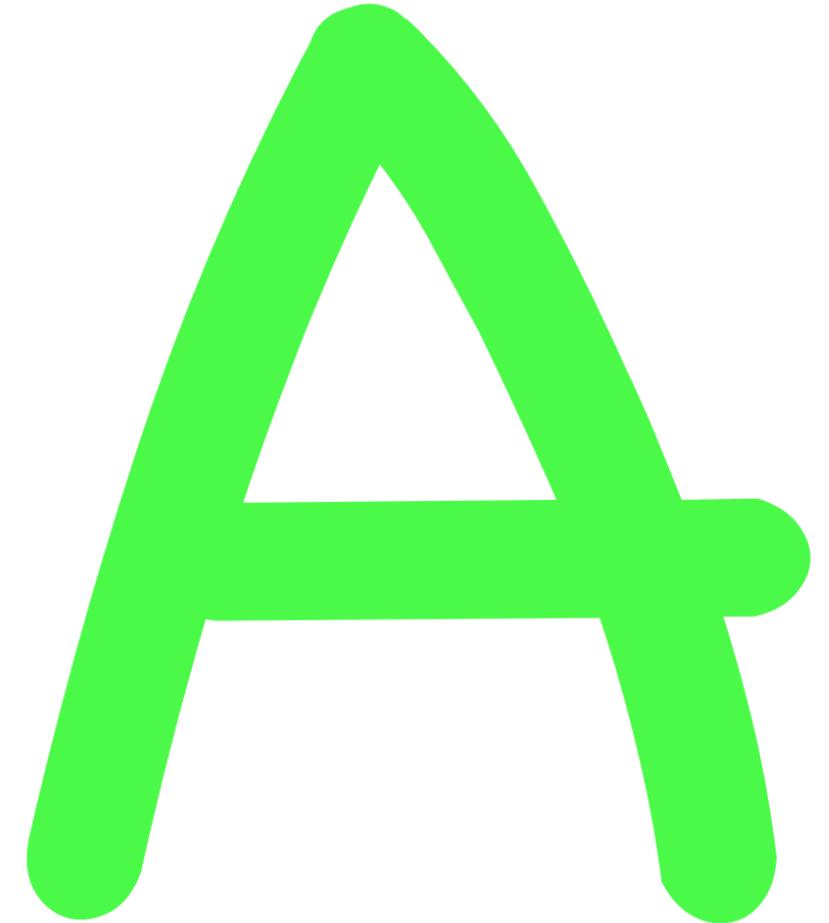


Attributed Strings

So what kind of attributes are there?

```
@{ NSFontAttributeName :  
    [UIFont preferredFontWithTextStyle:UIFontTextStyleHeadline]  
NSForegroundColorAttributeName : [UIColor greenColor],  
NSStrokeWidthAttributeName : @-5,  
NSStrokeColorAttributeName : [UIColor orangeColor] }
```


Negative number means "fill and stroke."
Positive number is stroke only (outline).

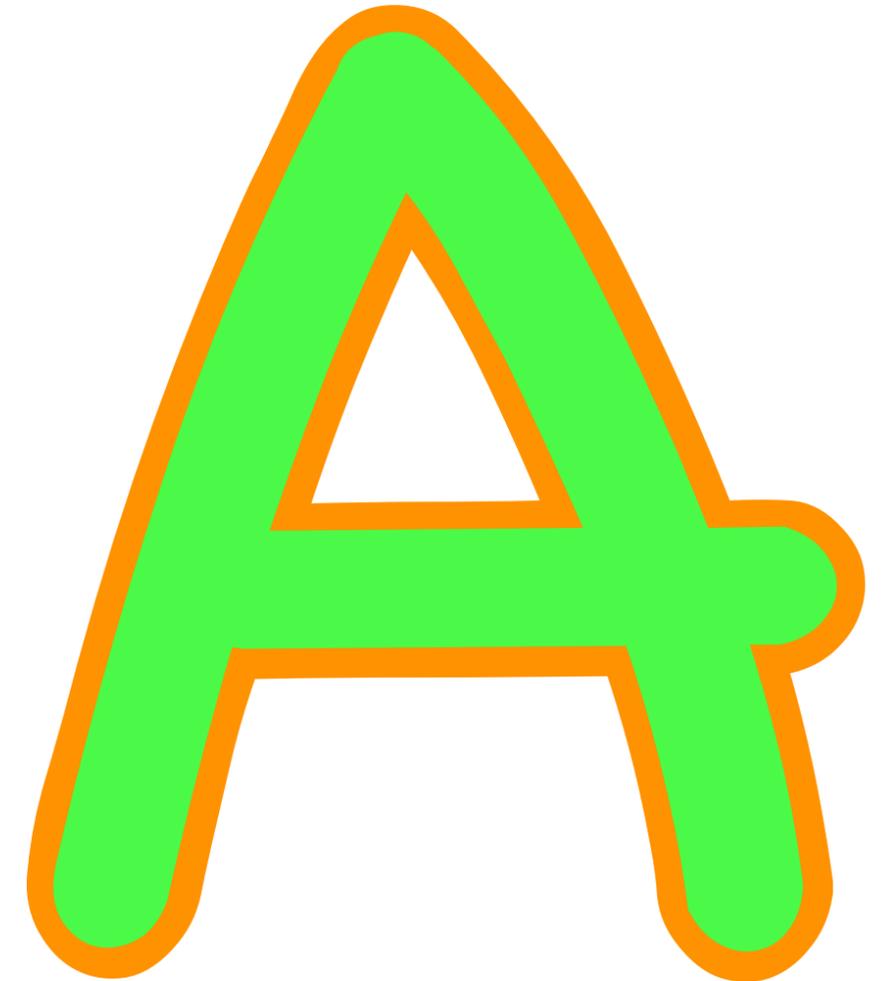

Attributed Strings

So what kind of attributes are there?


```
@{ NSFontAttributeName :  
    [UIFont preferredFontWithTextStyle:UIFontTextStyleHeadline]  
NSForegroundColorAttributeName : [UIColor greenColor],  
NSStrokeWidthAttributeName : @-5,  
NSStrokeColorAttributeName : [UIColor redColor] }
```

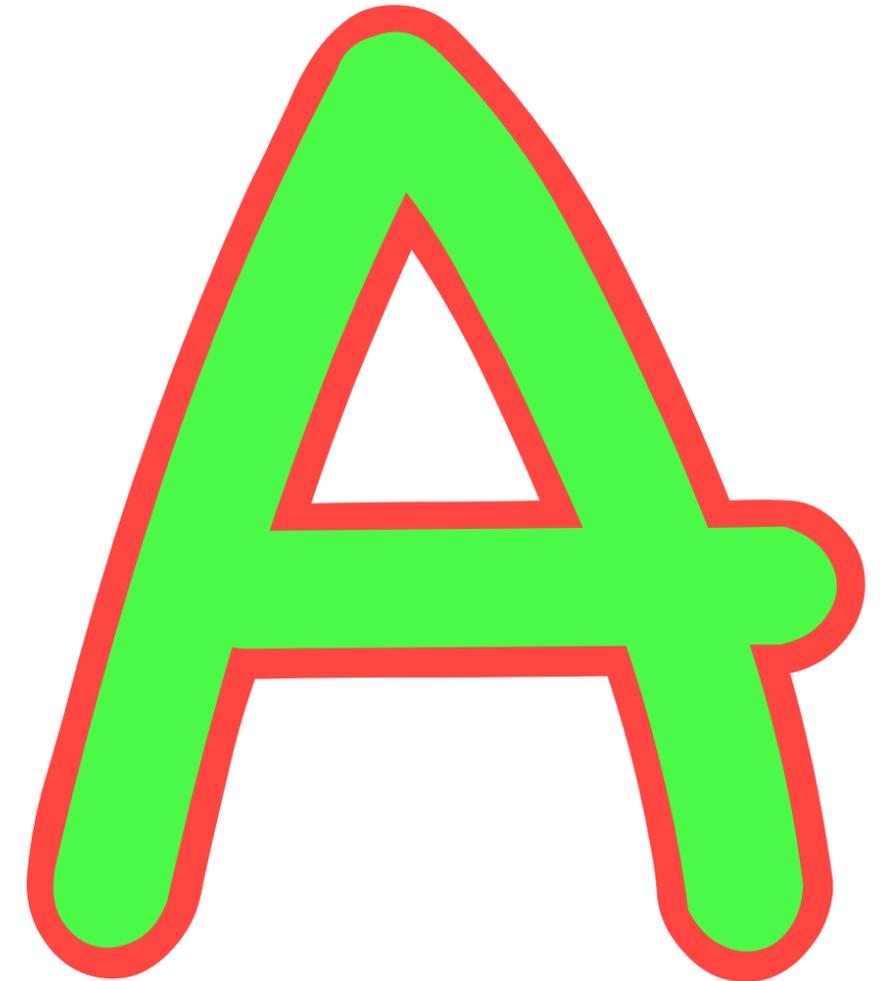

Attributed Strings

So what kind of attributes are there?


```
@{ NSFontAttributeName :  
    [UIFont preferredFontWithTextStyle:UIFontTextStyleHeadline]  
NSForegroundColorAttributeName : [UIColor greenColor],  
NSStrokeWidthAttributeName : @-5,  
NSStrokeColorAttributeName : [UIColor redColor],  
NSUnderlineStyleAttributeName : @(NSUnderlineStyleSingle) }
```

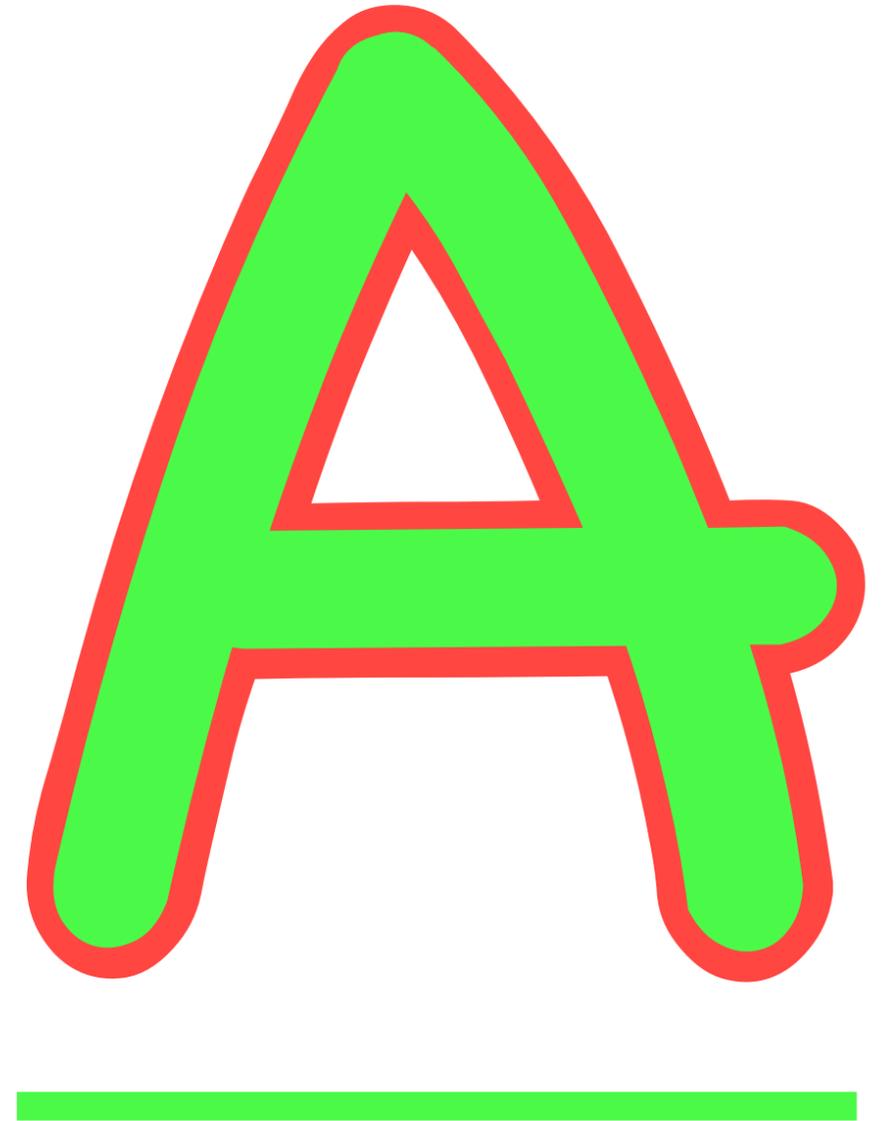

Attributed Strings

So what kind of attributes are there?


```
@{ NSFontAttributeName :  
    [UIFont preferredFontWithTextStyle:UIFontTextStyleHeadline]  
NSForegroundColorAttributeName : [UIColor greenColor],  
NSStrokeWidthAttributeName : @-5,  
NSStrokeColorAttributeName : [UIColor redColor],  
NSUnderlineStyleAttributeName : @(NSUnderlineStyleNone) }
```

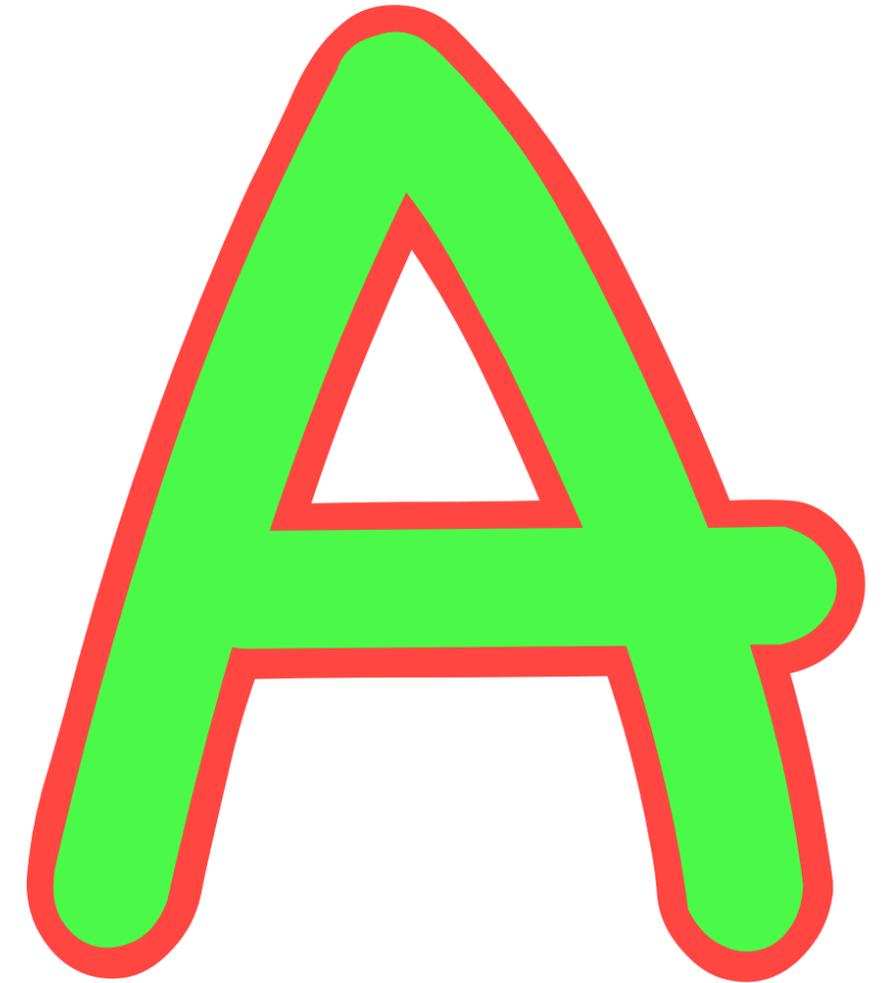

Attributed Strings

```
UIColor *yellow = [UIColor yellowColor];
UIColor *transparentYellow = [yellow colorWithAlphaComponent:0.3];
@{ NSFontAttributeName :
    [UIFont preferredFontWithTextStyle:UIFontTextStyleHeadline]
NSForegroundColorAttributeName : [UIColor greenColor],
NSStrokeWidthAttributeName : @-5,
NSStrokeColorAttributeName : [UIColor redColor],
NSUnderlineStyleAttributeName : @(NSUnderlineStyleNone),
NSBackgroundColorAttributeName : transparentYellow }
```

You could use transparent colors
in other attributes as well.

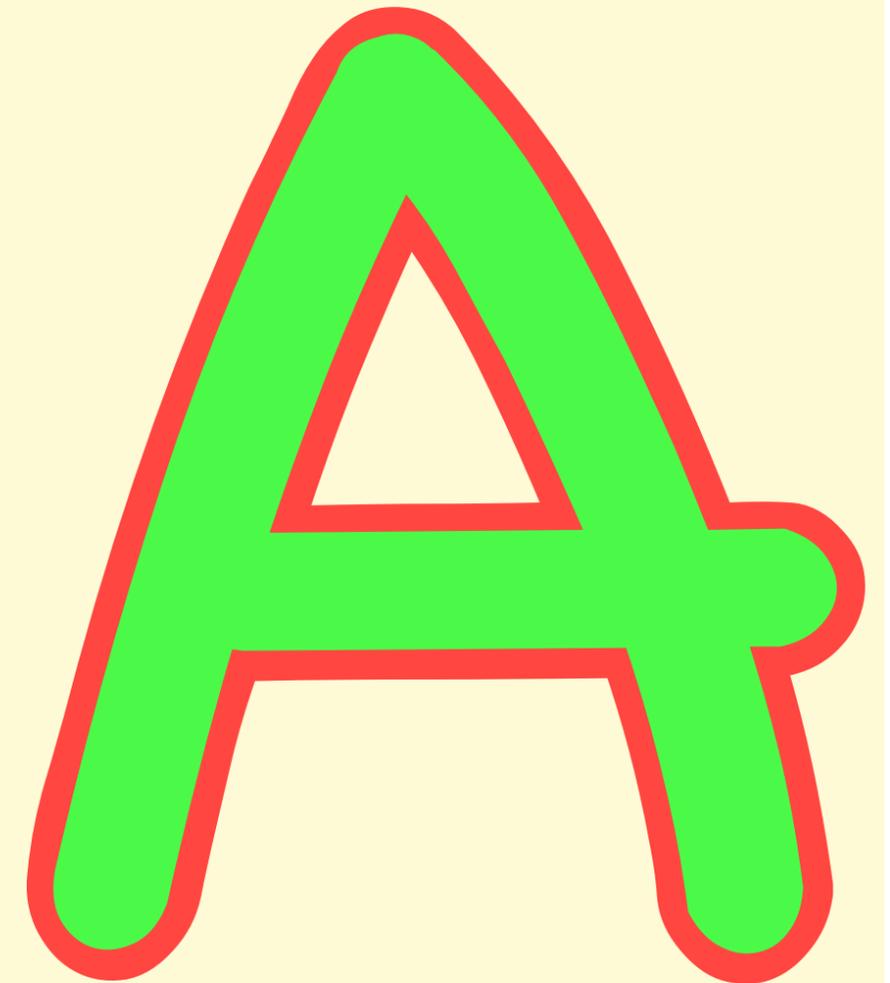

NSAttributedString

Where do attributed strings get used?

UIButton's - (void)setAttributedTitle:(NSAttributedString *)title forState:...

UILabel's @property (nonatomic, strong) NSAttributedString *attributedText;

UITextView's @property (nonatomic, readonly) NSTextStorage *textStorage;

UIButton

Attributed strings on buttons will be extremely use for your homework.

Drawing strings directly

Next week we'll see how to draw things directly on screen.

NSAttributedString know how to draw themselves on screen, for example ...

- (void)drawInRect:(CGRect)aRect;

Don't worry about this too much for now. Wait until next week.

UILabel

UILabel

You have been setting its contents using the NSString property text.

But it also has a property to set/get its text using an

```
NSAttributedString ... @property (nonatomic, strong) NSAttributedString *attributedText;
```

Note that this attributed string is not mutable

So, to modify what is in a UILabel, you must make a mutableCopy, modify it, then set it back.

```
NSMutableAttributedString *labelText = [myLabel.attributedText mutableCopy];
```

```
[labelText setAttributes:...];
```

```
myLabel.attributedText = labelText;
```

Don't need this very often

There are properties in UILabel like font, textColor, etc., for setting look of all characters. The attributed string in UILabel would be used mostly for "specialty labels".