


Programming Shared-memory Machines

Some slides adapted from Ananth Grama, Anshul Gupta, George Karypis, and Vipin Kumar ``Introduction to Parallel Computing'', Addison Wesley, 2003.

Overview

- Thread Basics
- The POSIX Thread API
- Synchronization primitives in Pthreads
 - locks
 - try-locks
- Deadlocks and how to avoid them
- Composite synchronization constructs
- Controlling Thread and Synchronization Attributes
- OpenMP: a Standard for Directive Based Parallel Programming



Process vs Threads

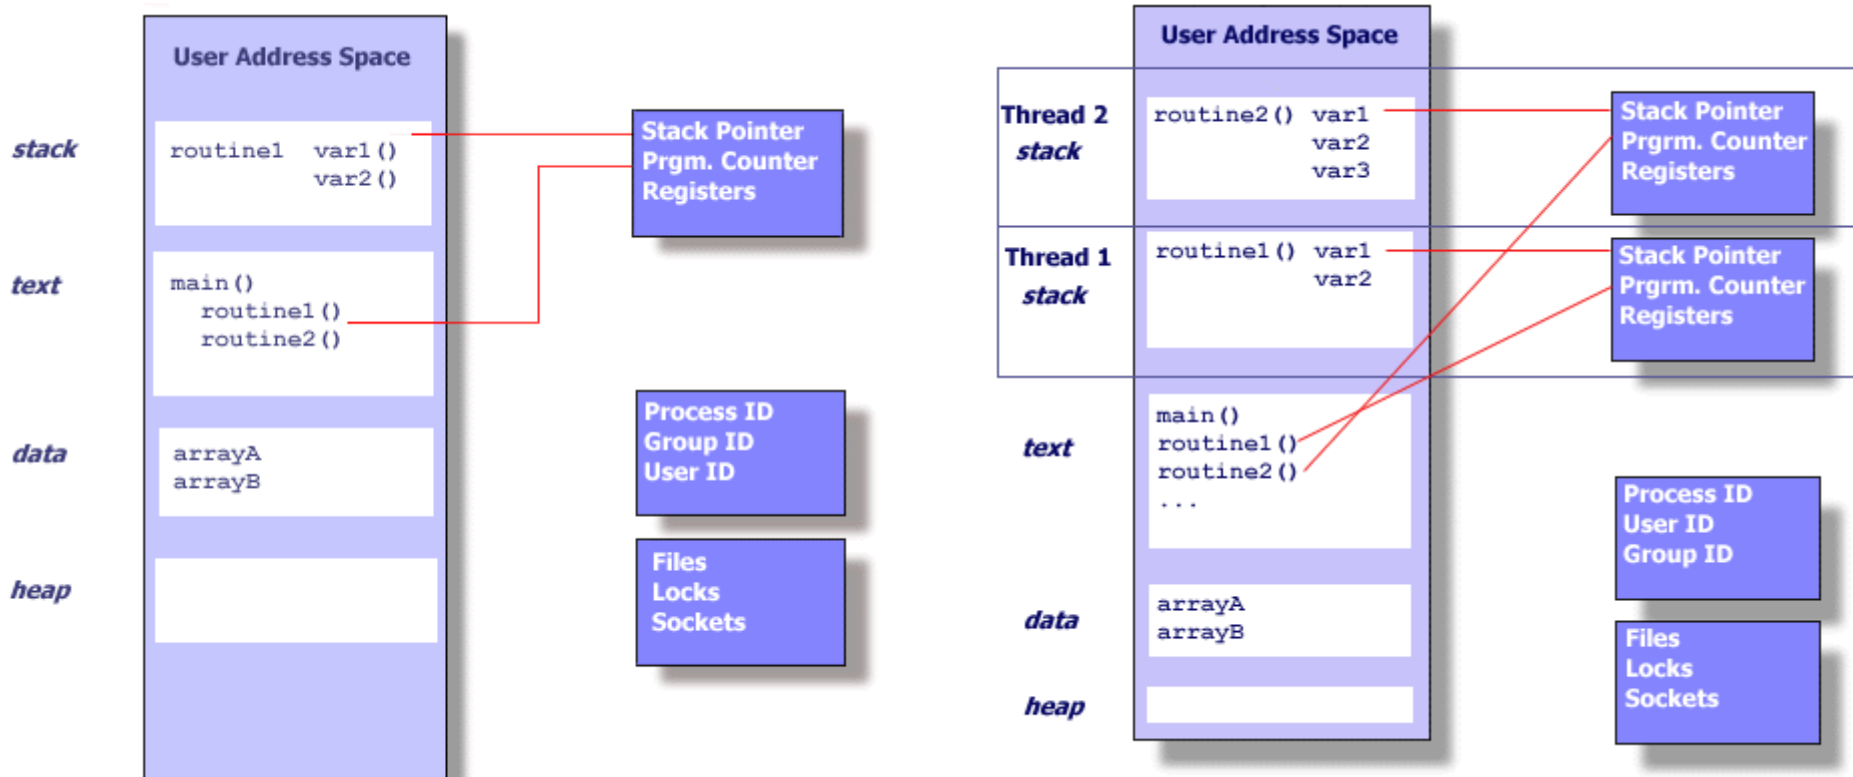

Thread Basics

- Each thread has its own stack, SP, PC, registers, etc.
- Threads share global variables and heap.
- Caveat: writing programs in which shared space is treated as a “flat” address space may give poor performance
 - Locality is just as important in shared-memory machines as it is in distributed-memory machines

Thread Basics

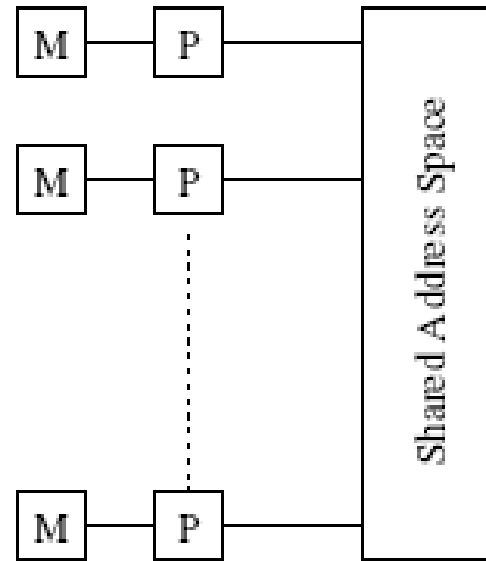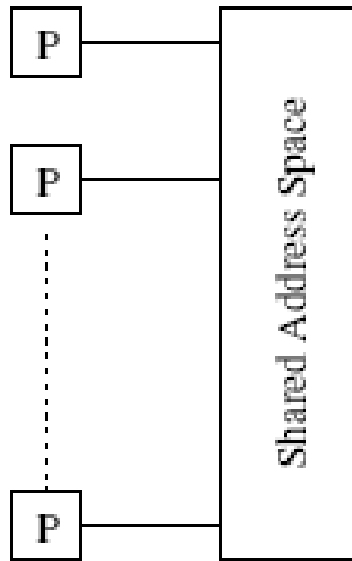

- Logical machine model of a thread-based programming paradigm
 - Each thread has its own stack and registers
 - Globals and heap are shared by all threads

The POSIX Thread API

- Commonly referred to as Pthreads, POSIX has emerged as the standard threads API, supported by most vendors.
- The concepts discussed here are largely independent of the API and can be used for programming with other thread APIs (NT threads, Solaris threads, Java threads, etc.) as well.

Thread Basics: Creation and Termination

- Creating Pthreads:

```
#include <pthread.h>
int pthread_create (
    pthread_t *thread_handle,
    const pthread_attr_t *attribute,
    void * (*thread_function)(void *),
    void *arg);
```

- Thread is created and it starts to execute **thread_function** with parameter **arg**
- Thread handle: name for thread

Terminating threads

- Thread terminated when:
 - it returns from its starting routine, or
 - it makes a call to `pthread_exit()`
- Main thread
 - exits with `pthread_exit()`: other threads will continue to execute
 - Otherwise: other threads automatically terminated
- Cleanup:
 - `pthread_exit()` routine does not close files
 - any files opened inside the thread will remain open after the thread is terminated.


```
#include <pthread.h>
#include <stdio.h>
#include <stdlib.h>
#define NUM_THREADS 5

void *PrintHello(void *threadid) {
    printf("\n%d: Hello World!\n", threadid);
    pthread_exit(NULL);
}

int main(int argc, char *argv[]) {
    pthread_t threads[NUM_THREADS];
    int rc, t;
    for(t=0;t<NUM_THREADS;t++){
        printf("Creating thread %d\n", t);
        rc = pthread_create(&threads[t], NULL, PrintHello, (void *)t);
        if (rc){ printf("ERROR; return code from pthread_create() is %d\n", rc);
            exit(-1);
        }
    }
    pthread_exit(NULL);
}
```

Output

Creating thread 0

Creating thread 1

0: Hello World!

1: Hello World!

Creating thread 2

Creating thread 3

2: Hello World!

3: Hello World!


Creating thread 4

4: Hello World!

Synchronizing threads


- "Joining" is one way to synchronize threads (not used very often)

`pthread_join (threadid,status)`

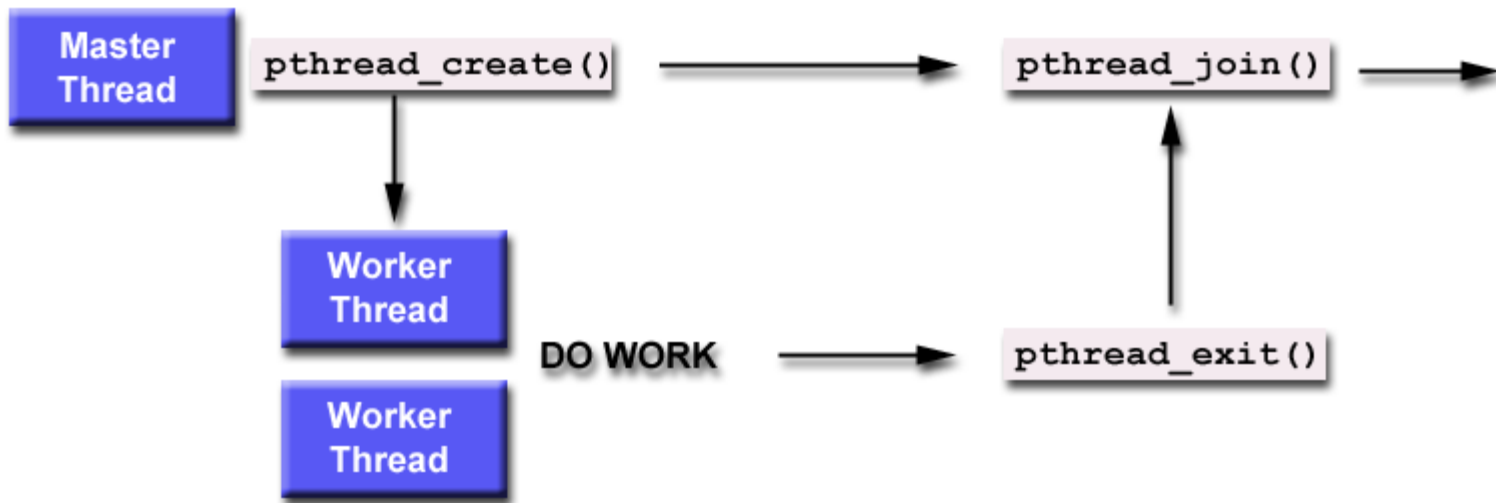

- The `pthread_join()` function blocks the calling thread until the specified thread terminates.
- The programmer can obtain the target thread's termination return status if it was specified in the target thread's call to `pthread_exit()`.

Threads: Example 2

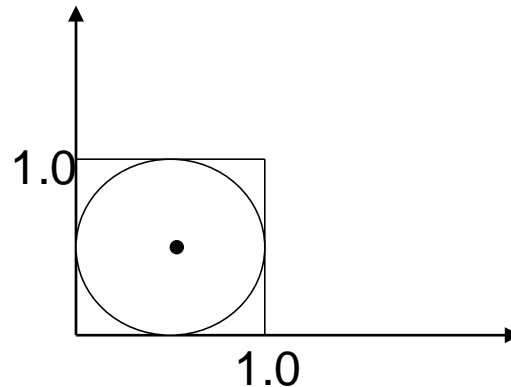

- Area of circle = $\pi * 0.25$
- Area of square = 1
- So if we shoot randomly into square, probability of hitting circle is $\pi * 0.25$
- Estimating value of π :
 - generate a large number of random values inside the unit square
 - see what fraction of them fall inside circle and multiply by 4
- Simple example of **Monte Carlo method: estimate some value by repeated sampling of some space**
- **Monte Carlo method can be easily parallelized provided each parallel thread generates independent random numbers**

Generating random numbers

- `int rand_r(unsigned int *seedp)`
 - each call generates one number in a pseudo-random number sequence
 - call it multiple times to generate the sequence
 - thread-safe: can be called safely by multiple threads without interference
 -

Threads: Example2


```
#include <pthread.h>
#include <stdlib.h>
#define MAX_THREADS 512
void *compute_pi (void *);
....
main() {
    ...
    pthread_t p_threads[MAX_THREADS];
    pthread_attr_t attr;
    pthread_attr_init (&attr);
    for (i=0; i< num_threads; i++) {
        hits[i] = i;
        pthread_create(&p_threads[i], &attr, compute_pi,
            (void *) &hits[i]);
    }
    for (i=0; i< num_threads; i++) {
        pthread_join(p_threads[i], NULL);
        total_hits += hits[i];
    }
    ...
}
```

Threads: Example2 (contd.)

```
void *compute_pi (void *s) {
    int seed, i, *hit_pointer;
    double rand_no_x, rand_no_y;
    int local_hits;
    hit_pointer = (int *) s;
    seed = *hit_pointer;
    local_hits = 0;
    for (i = 0; i < sample_points_per_thread; i++) {
        rand_no_x =(double)(rand_r(&seed))/((double)((2<<14)-1));
        rand_no_y =(double)(rand_r(&seed))/((double)((2<<14)-1));
        if (((rand_no_x - 0.5) * (rand_no_x - 0.5) +
            (rand_no_y - 0.5) * (rand_no_y - 0.5)) < 0.25)
            local_hits ++;
        seed *= i;
    }
    *hit_pointer = local_hits;
    pthread_exit(0);
}
```

Synchronizing threads

- Style of computing shown in Example 2 is sometimes called fork-join parallelism



- This style of parallel execution in which threads only synchronize at the end is quite rare
- Usually, threads need to synchronize during their execution

Need for synchronization

- Two common scenarios:
 - Mutual exclusion
 - Shared “resource” such as variable or device
 - Only one thread at a time can access resource
 - **Critical section**: portion of code that should be executed by only thread at a time
 - Producer-consumer
 - One thread (producer) generates a sequence of values
 - Another thread (consumer) reads these values
 - Values are communicated by writing them into a shared buffer
 - Producer must block if buffer is full
 - Consumer must block if buffer is empty

Need for Mutual Exclusion

- When multiple threads attempt to manipulate the same data item, the results can often be incorrect if proper care is not taken to synchronize them.
- Consider:

```
/* each thread tries to update variable best_cost as follows
*/
if (my_cost < best_cost)
    best_cost = my_cost;
```
- Assume that there are two threads, the initial value of `best_cost` is 100, and the values of `my_cost` are 50 and 75 at threads `t1` and `t2`.
- Depending on the schedule of the threads, the value of `best_cost` could be 50 or 75!
 - Thread 1 reads `best_cost` (100)
 - Thread 2 reads `best_cost` (100)
 - Thread 1 writes `best_cost` (50)
 - Thread 2 writes `best_cost` (75)
- The value 75 does not “seem right” because it would not arise in a sequential execution of the same algorithm

General problem

- The code in the previous example is called a **critical section**
 - Several threads may try to execute code in critical section but only one should succeed at a time
- Problem arises very often when writing threaded code
 - Thread A want to read and write one or more variables in critical section
 - While it is doing that, other threads should be excluded from accessing those variables
- Solution: lock
 - Threads compete for “acquiring” lock
 - Pthreads implementation guarantees that only one thread will succeed in acquiring lock
 - Successful thread enters critical section, performs its activity
 - When critical section is done, lock is “released”

Mutex in Pthreads

- The Pthreads API provides the following functions for handling mutex-locks:

- Lock creation

```
int pthread_mutex_init (  
    pthread_mutex_t *mutex_lock,  
    const pthread_mutexattr_t *lock_attr);
```

- Acquiring lock

```
int pthread_mutex_lock (  
    pthread_mutex_t *mutex_lock);
```

- Releasing lock

```
int pthread_mutex_unlock (  
    pthread_mutex_t *mutex_lock);
```

Implementation (see next time)

- Lock is implemented by
 - variable with two states: *available* or *not_available*
 - queue that can hold ids of threads waiting for the lock
- Lock acquire:
 - If state of lock is *available*, its state is changed to *not_available*, and control returns to application program
 - If state of lock is *not_available*, thread-id is queued up at the lock, and control returns to application program only when lock is acquired by that thread
 - **Key invariant: once a thread tries to acquire lock, control returns to thread only after lock has been awarded to that thread**
- Lock release:
 - next thread in queue is informed it has acquired lock, and it can proceed
- “Fairness”: any thread that wants to acquire a lock can succeed ultimately even if other threads want to acquire the lock an unbounded number of times

Correct Mutual Exclusion

- We can now write our previously incorrect critical section as:

```
pthread_mutex_t minimum_value_lock;
...
main() {
    ....
    pthread_mutex_init(&minimum_value_lock, NULL);
    ....
}
void *find_min(void *list_ptr) {
    ....
    pthread_mutex_lock(&minimum_value_lock);
    if (my_min < minimum_value)
        minimum_value = my_min;
    /* and unlock the mutex */
    pthread_mutex_unlock(&minimum_value_lock);
}
```

critical section

Critical sections

- For performance, it is important to keep critical sections as small as possible
- While one thread is within critical section, all other threads that want to enter the critical section are blocked
- It is up to the programmer to ensure that locks are used correctly to protect variables in critical sections

Thread A	Thread B	Thread C
lock(l)	lock(l)	
X:= ..X..	X:= ..X..	X: = ...X
unlock(l)	unlock(l)	


This program may fail to execute correctly because programmer forgot to use locks in Thread C

Producer-Consumer Using Locks

- Two threads
 - Producer: produces data
 - Consumer: consumes data
- Shared buffer is used to communicate data from producer to consumer
 - Buffer can contain one data value (in this example)
 - Flag is associated with buffer to indicate buffer has valid data
- Consumer must not read data from buffer unless there is valid data
- Producer must not overwrite data in buffer before it is read by consumer

Producer-Consumer Using Locks




```
pthread_mutex_t data_queue_lock;
int data_available; //1 if buffer is full
...
main() {
    ....
    data_available = 0;
    pthread_mutex_init(&data_queue_lock, NULL);
    ....
}
void *producer(void *producer_thread_data) {
    ....
    while (!done()) {
        create_data(&my_data);
        inserted = 0;
        while (inserted == 0) {
            pthread_mutex_lock(&data_queue_lock);
            if (data_available == 0) {
                insert_data(my_data);
                data_available = 1;
                inserted = 1;
            }
            pthread_mutex_unlock(&data_queue_lock);
        }
    }
}
```

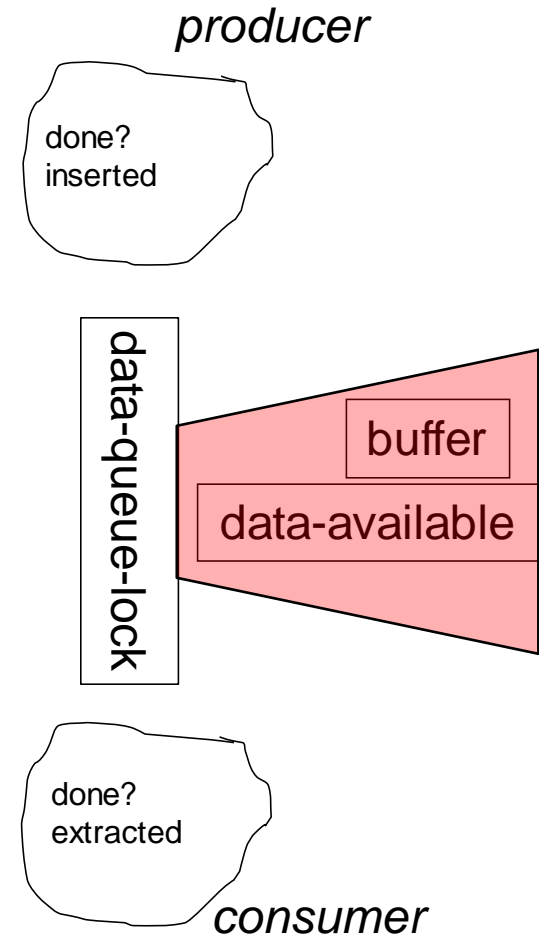

Producer-Consumer Using Locks

```
void *consumer(void *consumer_thread_data) {
    int extracted;
    struct data my_data;
    /* local data structure declarations */
    while (!done()) {
        extracted = 0;
        while (extracted == 0) {
            pthread_mutex_lock(&data_queue_lock);
            if (data_available == 1) {
                extract_data(&my_data);
                data_available = 0;
                extracted = 1;
            }
            pthread_mutex_unlock(&data_queue_lock);
        }
        process_data(my_data);
    }
}
```

producer

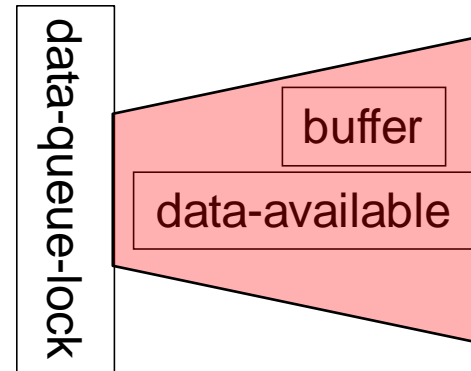

consumer

Types of Mutexes

- Pthreads supports three types of mutexes - normal, recursive, and error-check.
- A normal mutex deadlocks if a thread that already has a lock tries a second lock on it.
- A recursive mutex allows a single thread to lock a mutex as many times as it wants. It simply increments a count on the number of locks. A lock is relinquished by a thread when the count becomes zero.
- An error check mutex reports an error when a thread with a lock tries to lock it again (as opposed to deadlocking in the first case, or granting the lock, as in the second case).
- The type of the mutex can be set in the attributes object before it is passed at time of initialization.

Reducing lock overhead

- Another kind of lock: trylock.

```
int pthread_mutex_trylock (  
    pthread_mutex_t *mutex_lock);
```

- If lock is available, acquire it; otherwise, return a “busy” error code (EBUSY)
- Faster than `pthread_mutex_lock` on typical systems since it does not have to deal with queues associated with locks for multiple threads waiting on the lock.

Alleviating Locking Overhead (Example)

```
/* Finding k matches in a list */
void *find_entries(void *start_pointer) {
    /* This is the thread function */
    struct database_record *next_record;
    int count;
    current_pointer = start_pointer;
    do {
        next_record = find_next_entry(current_pointer);
        count = output_record(next_record);
    } while (count < requested_number_of_records);
}

int output_record(struct database_record *record_ptr) {
    int count;
    pthread_mutex_lock(&output_count_lock);
    output_count ++;
    count = output_count;
    pthread_mutex_unlock(&output_count_lock);
    if (count <= requested_number_of_records)
        print_record(record_ptr);
    return (count);
}
```

Alleviating Locking Overhead (Example)

```
/* rewritten output_record function */
int output_record(struct database_record
    *record_ptr) {
    int count;
    int lock_status;
    lock_status=pthread_mutex_trylock(&output_count_lock);
    if (lock_status == EBUSY) {
        insert_into_local_list(record_ptr);
        return(0);
    }
    else {
        count = output_count;
        output_count += number_on_local_list + 1;
        pthread_mutex_unlock(&output_count_lock);
        print_records(record_ptr, local_list,
            requested_number_of_records - count);
        return(count + number_on_local_list + 1);
    }
}
```

Problems with locks

- Locks are most dangerous when a thread needs to acquire multiple locks before releasing locks
- Two main problems:
 - deadlock
 - livelock
- **Deadlock:**
 - Threads A and B need locks L1 and L2
 - Thread A acquires L1 and wants L2
 - Thread B acquires L2 and wants L1
 - In general, there will be a cycle of threads in which each thread holds some locks and is waiting for locks held by other threads in the cycle
- **Livelock:**
 - may arise in some solutions to deadlock

Deadlock


- Code snippet shows example of possible deadlock
- Subtle point:
 - deadlock may happen in some executions and not in others!
- “Deadly embrace”:
Dijkstra
- How do we ensure deadlocks cannot occur?

Thread 1:

...
lock(L1);
lock(L2);
.....

Thread 2:

...
lock(L2);
lock(L1);
...

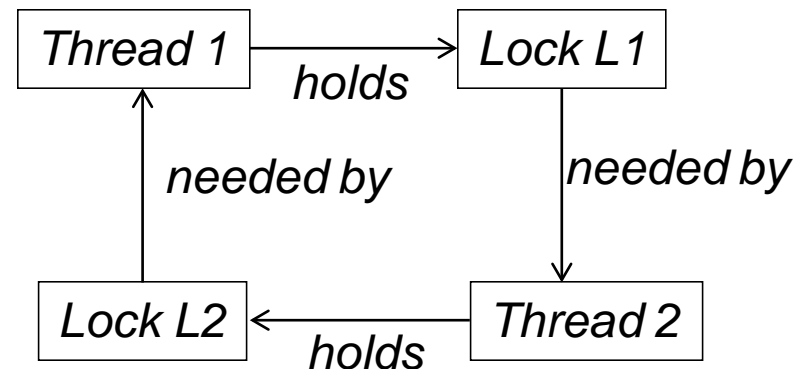

Deadlock: four conditions

- Mutual exclusion:
 - thread has exclusive control over resource it acquires
- Hold-and-wait:
 - thread does not release resource it holds if it is waiting for another resource
- No pre-emption:
 - No external agency forces a thread to release resources if thread is waiting for another resource
- Circular wait:
 - There is a cycle of threads such that each thread holds one or more resources needed by the next thread in the cycle

You prevent deadlocks by ensuring that one or more of these conditions cannot arise in your program.

Prevent circular wait

- Assign a logical total order to locks
 - (eg) name them L1,L2,L3,...
- Ensure that threads will never try to acquire a lower numbered lock while holding a higher numbered lock
 - (eg) if thread owns L3, it can try to acquire L4, L5, L6,... but it cannot try to acquire locks L1 or L2 (unless it already owns them and locks are re-entrant)
- Useful software engineering principle when you have control over the entire code base and you know what locks are required where
- However
 - easy to make mistakes
 - tension with encapsulation:
 - requires detailed knowledge of entire code base

Prevent hold-and-wait

- Try to acquire all locks atomically
- One implementation:
 - single global lock to get permission to acquire locks you need
- Problem:
 - not scalable
 - conflicts with modularity and encapsulation
- You might encounter a hidden version of this problem if thread has to enter the kernel to perform some function like storage allocation
 - kernel lock is like the global-lock in our example

```
...  
lock(global-lock);  
lock(l1);  
lock(l2);  
unlock(global-lock);  
...
```

Self-preemption

- Coding discipline:
 - Use only try-locks
 - If a thread cannot acquire a lock while it is holding other locks, it releases all locks it holds and tries again
 - Variation: OS or some other agency steps in and preempts a thread
- Problems:
 - Encapsulation
 - Livelock: threads can keep on acquiring and releasing locks without making progress because no thread ever gets all the locks it needs
 - One solution to livelock: (Ethernet) backoff: thread does not retry until some randomly chosen amount of time has passed

```
loop:
//start of lock acquires
    ....
if (trylock(Lj) == EBUSY) {
//unlock all locks you hold
    goto loop;
}
    ....
endloop:

//compute with resources
//release locks
```

Lock-free synchronization

- Use more powerful hardware instructions that perform atomic computations on variables
 - no notion of “holding” resources like locks
 - these atomic computations are enough for many applications but in general, they need to be composed and this can be tricky

- **Example: CompareAndSwap instruction**

```
int CompareAndSwap(int *address, int expected, int new)
    if (*address == expected) {
        *address = new;
        return SUCCESS;
    }
    else return FAIL;
```

```
void AtomicIncrement(int *value; int amount) {
    do {int old = *value;
        } while (CompareAndSwap(value,old,old+amount) == FAIL)
```

Controlling Thread and Synchronization Attributes

- The Pthreads API allows a programmer to change the default attributes of entities using *attributes objects*.
- An attributes object is a data-structure that describes entity (thread, mutex, condition variable) properties.
- Once these properties are set, the attributes object can be passed to the method initializing the entity.
- Enhances modularity, readability, and ease of modification.

Attributes Objects for Threads

- Use `pthread_attr_init` to create an attributes object.
- Individual properties associated with the attributes object can be changed using the following functions:

`pthread_attr_setdetachstate,`
`pthread_attr_setguardsize_np,`
`pthread_attr_setstacksize,`
`pthread_attr_setinheritsched,`

`pthread_attr_setschedpolicy,` **and**
`pthread_attr_setschedparam`

Attributes Objects for Mutexes

- Initialize the attributes object using function:
`pthread_mutexattr_init.`
- The function `pthread_mutexattr_settype_np` can be used for setting the type of mutex specified by the mutex attributes object.

```
pthread_mutexattr_settype_np (  
pthread_mutexattr_t *attr,  
int type);
```
- Here, `type` specifies the type of the mutex and can take one of:
 - `PTHREAD_MUTEX_NORMAL_NP`
 - `PTHREAD_MUTEX_RECURSIVE_NP`
 - `PTHREAD_MUTEX_ERRORCHECK_NP`

Types of threads

- Thread implementations:
 - User-level threads:
 - Implemented by user-level runtime library
 - OS is unaware of threads
 - Portable, thread scheduling can be tuned to application requirements
 - Problem: cannot leverage multiprocessors, entire process blocks when one thread blocks
 - Kernel-level threads:
 - OS is aware of each thread and schedules them
 - Thread operations are performed by OS
 - Can leverage multiprocessors
 - Problem: higher overhead, usually not quite as portable
 - Hybrid-level threads: Solaris
 - OS provides some number of kernel level threads, and each of these can create multiple user-level threads
 - Problem: complexity

global main

extern printf

extern pthread_create

extern pthread_exit

extern pthread_join

section .data

align 4

*sLock: dd 0 ; The lock, values are:
; 0 unlocked
; 1 locked*

tID1: dd 0

tID2: dd 0

fmtStr1: db "In thread %d with ID: %02x", 0x0A, 0

fmtStr2: db "Result %d", 0x0A, 0

section .bss

align 4

result: resd 1

thread1:

```
pause  
push    dword [tID1]  
push    dword 1  
push    dword fmtStr1  
call    printf  
add    esp, 12           ; Pop stack 3 times 4 bytes  
  
call    spinLock  
  
mov    [result], dword 1  
call    spinUnlock  
  
push    dword 0           ; Arg one: retval  
call    pthread_exit
```

thread2:

```
pause  
push    dword [tID2]  
push    dword 2  
push    dword fmtStr1  
call    printf  
add    esp, 12           ; Pop stack 3 times 4 bytes  
  
call    spinLock  
  
mov    [result], dword 2  
call    spinUnlock  
  
push    dword 0           ; Arg one: retval  
call    pthread_exit
```

spinLock:

```
    push    ebp
    mov     ebp, esp
    mov     edx, 1                ; Value to set sLock to
spin:  mov     eax, [sLock] ; Check sLock
    test   eax, eax             ; If it was zero, maybe we have the lock
    jnz   spin                 ; If not try again
    ;
    ; Attempt atomic compare and exchange:
    ; if (sLock == eax):
    ;     sLock          <- edx
    ;     zero flag     <- 1
    ; else:
    ;     eax            <- edx
    ;     zero flag     <- 0
    ;
    ; If sLock is still zero then it will have the same value as eax and
    ; sLock will be set to edx which is one and therefore we acquire the
    ; lock. If the lock was acquire between the first test and the
    ; cmpxchg then eax will not be zero and we will spin again.
    ;
lock   cmpxchg [sLock], edx ;eax is implicit operand
    test   eax, eax
    jnz   spin
    pop    ebp
    ret
```

spinUnlock:

```
    push    ebp
    mov     ebp, esp
    mov     eax, 0
    xchg   eax, [sLock]
    pop    ebp
    ret
```

exit:

```
mov     ebx, 0  
mov     eax, 1  
int     0x80
```

```
;  
; Call exit(3) syscall  
; void exit(int status)  
;  
; Arg one: the status  
; Syscall number:
```

OpenMP: a Standard for Directive Based Parallel Programming

- OpenMP is a directive-based API that can be used with FORTRAN, C, and C++ for programming shared address space machines.
- OpenMP directives provide support for concurrency, synchronization, and data handling while obviating the need for explicitly setting up mutexes, condition variables, data scope, and initialization.

OpenMP Programming Model

- OpenMP directives in C and C++ are based on the `#pragma` compiler directives.
- A directive consists of a directive name followed by clauses.


```
#pragma omp directive [clause list]
```
- OpenMP programs execute serially until they encounter the `parallel` directive, which creates a group of threads.

```
#pragma omp parallel [clause list]
/* structured block */
```
- The main thread that encounters the `parallel` directive becomes the *master* of this group of threads and is assigned the thread id 0 within the group.

OpenMP Programming Model

- The clause list is used to specify conditional parallelization, number of threads, and data handling.
 - **Conditional Parallelization:** The clause `if (scalar expression)` determines whether the parallel construct results in creation of threads.
 - **Degree of Concurrency:** The clause `num_threads(integer expression)` specifies the number of threads that are created.
 - **Data Handling:** The clause `private (variable list)` indicates variables local to each thread. The clause `firstprivate (variable list)` is similar to the `private`, except values of variables are initialized to corresponding values before the parallel directive. The clause `shared (variable list)` indicates that variables are shared across all the threads.

OpenMP Programming Model

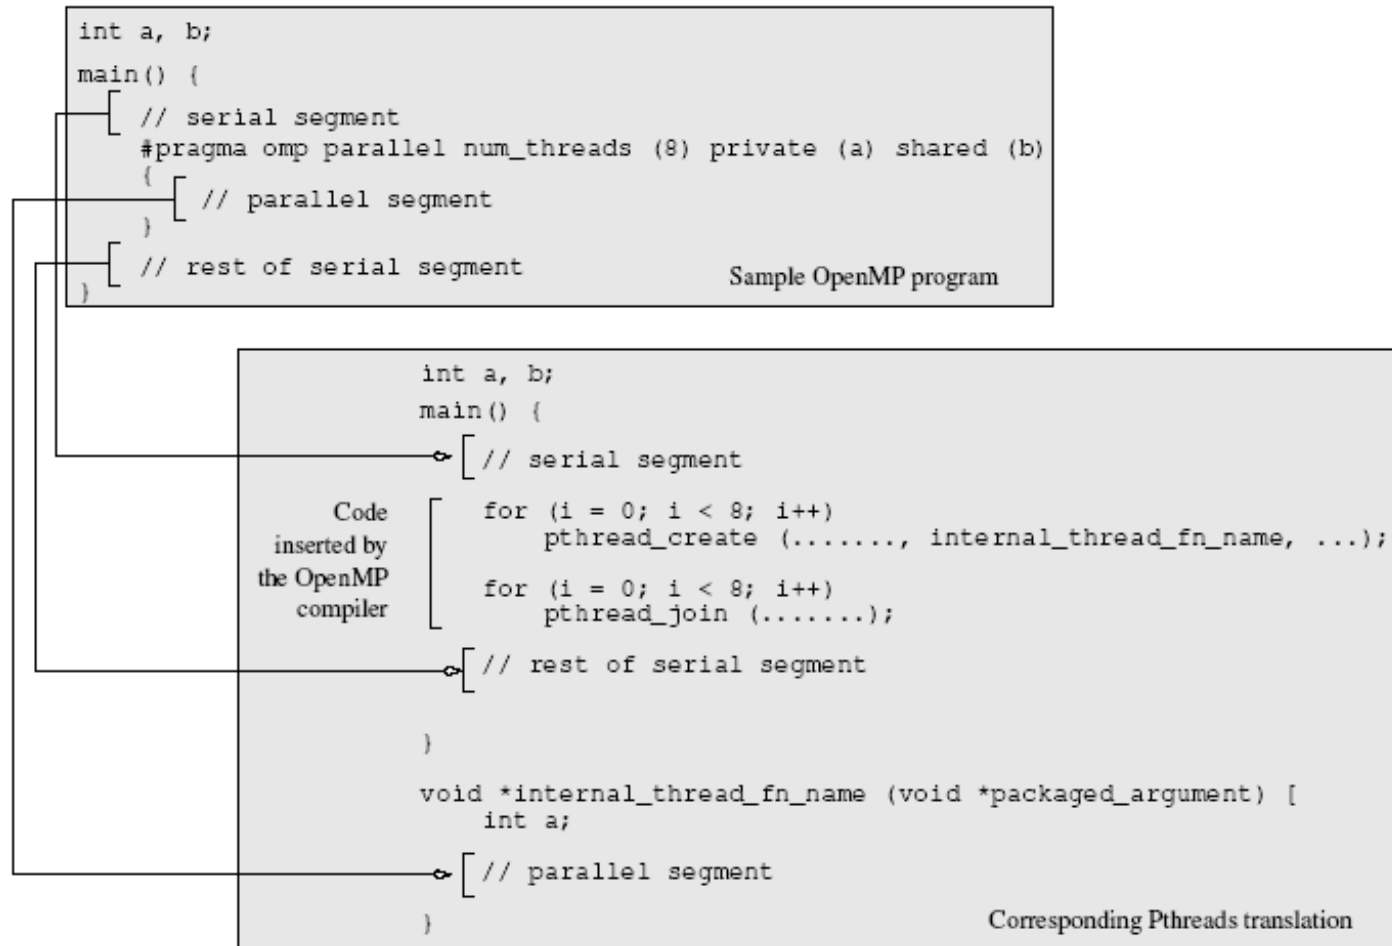

- A sample OpenMP program along with its Pthreads translation that might be performed by an OpenMP compiler.

OpenMP Programming Model

```
#pragma omp parallel if (is_parallel== 1) num_threads(8) \  
  private (a) shared (b) firstprivate(c) {  
  /* structured block */  
}
```

- If the value of the variable `is_parallel` equals one, eight threads are created.
- Each of these threads gets private copies of variables `a` and `c`, and shares a single value of variable `b`.
- The value of each copy of `c` is initialized to the value of `c` before the parallel directive.
- The default state of a variable is specified by the clause `default (shared)` or `default (none)`.

Reduction Clause in OpenMP

- The `reduction` clause specifies how multiple local copies of a variable at different threads are combined into a single copy at the master when threads exit.
- The usage of the `reduction` clause is `reduction (operator: variable list)`.
- The variables in the list are implicitly specified as being private to threads.
- The operator can be one of `+`, `*`, `-`, `&`, `|`, `^`, `&&`, and `||`.

```
#pragma omp parallel reduction(+: sum) num_threads(8) {  
/* compute local sums here */  
}  
/*sum here contains sum of all local instances of sums */
```

OpenMP Programming: Example

```
/* *****  
An OpenMP version of a threaded program to compute PI.  
***** */  
#pragma omp parallel default(private) shared (npoints) \  
    reduction(+: sum) num_threads(8)  
{  
    num_threads = omp_get_num_threads();  
    sample_points_per_thread = npoints / num_threads;  
    sum = 0;  
    for (i = 0; i < sample_points_per_thread; i++) {  
        rand_no_x = (double)(rand_r(&seed))/(double)((2<<14)-1);  
        rand_no_y = (double)(rand_r(&seed))/(double)((2<<14)-1);  
        if (((rand_no_x - 0.5) * (rand_no_x - 0.5) +  
            (rand_no_y - 0.5) * (rand_no_y - 0.5)) < 0.25)  
            sum ++;  
    }  
}
```

Specifying Concurrent Tasks in OpenMP

- The `parallel` directive can be used in conjunction with other directives to specify concurrency across iterations and tasks.
- OpenMP provides two directives - `for` and `sections` - to specify concurrent iterations and tasks.
- The `for` directive is used to split parallel iteration spaces across threads. The general form of a `for` directive is as follows:

```
#pragma omp for [clause list]
/* for loop */
```
- The clauses that can be used in this context are: `private`, `firstprivate`, `lastprivate`, `reduction`, `schedule`, `nowait`, and `ordered`.

Specifying Concurrent Tasks in OpenMP: Example

```
#pragma omp parallel default(private) shared (npoints) \  
  reduction(+: sum) num_threads(8)  
{  
  sum = 0;  
  #pragma omp for  
  for (i = 0; i < npoints; i++) {  
    rand_no_x = (double)(rand_r(&seed)) / (double)((2<<14)-1);  
    rand_no_y = (double)(rand_r(&seed)) / (double)((2<<14)-1);  
    if (((rand_no_x - 0.5) * (rand_no_x - 0.5) +  
        (rand_no_y - 0.5) * (rand_no_y - 0.5)) < 0.25)  
      sum ++;  
  }  
}
```


Assigning Iterations to Threads

- The `schedule` clause of the `for` directive deals with the assignment of iterations to threads.
- The general form of the `schedule` directive is `schedule(scheduling_class[, parameter])`.
- OpenMP supports four scheduling classes: `static`, `dynamic`, `guided`, and `runtime`.

Assigning Iterations to Threads: Example

```
/* static scheduling of matrix multiplication loops */
#pragma omp parallel default(private) shared (a, b, c, dim) \
    num_threads(4)
#pragma omp for schedule(static)
for (i = 0; i < dim; i++) {
    for (j = 0; j < dim; j++) {
        c(i,j) = 0;
        for (k = 0; k < dim; k++) {
            c(i,j) += a(i, k) * b(k, j);
        }
    }
}
```

Assigning Iterations to Threads: Example

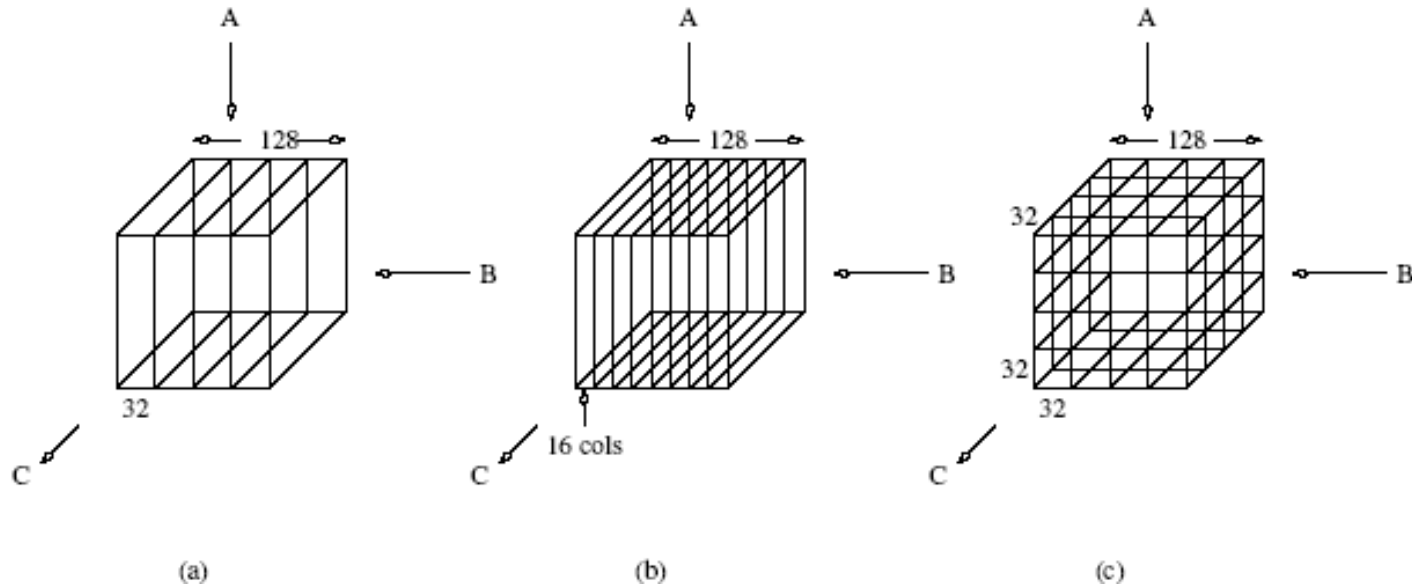

- Three different schedules using the static scheduling class of OpenMP.

Parallel For Loops

- Often, it is desirable to have a sequence of `for`-directives within a parallel construct that do not execute an implicit barrier at the end of each `for` directive.
- OpenMP provides a clause - `nowait`, which can be used with a `for` directive.

Parallel For Loops: Example

```
#pragma omp parallel
{
    #pragma omp for nowait
        for (i = 0; i < nmax; i++)
            if (isEqual(name, current_list[i])
                processCurrentName(name);
    #pragma omp for
        for (i = 0; i < mmax; i++)
            if (isEqual(name, past_list[i])
                processPastName(name);
}
```

The sections Directive

- OpenMP supports non-iterative parallel task assignment using the `sections` directive.
- The general form of the `sections` directive is as follows:

```
#pragma omp sections [clause list]
{
    [#pragma omp section
        /* structured block */
    ]
    [#pragma omp section
        /* structured block */
    ]
    ...
}
```

The sections Directive: Example

```
#pragma omp parallel
{
    #pragma omp sections
    {
        #pragma omp section
        {
            taskA();
        }
        #pragma omp section
        {
            taskB();
        }
        #pragma omp section
        {
            taskC();
        }
    }
}
```

Nesting `parallel` Directives

- Nested parallelism can be enabled using the `OMP_NESTED` environment variable.
- If the `OMP_NESTED` environment variable is set to `TRUE`, nested parallelism is enabled.
- In this case, each parallel directive creates a new team of threads.

Synchronization Constructs in OpenMP

- OpenMP provides a variety of synchronization constructs:

```
#pragma omp barrier
```

```
#pragma omp single [clause list]  
    structured block
```

```
#pragma omp master  
    structured block
```

```
#pragma omp critical [(name)]  
    structured block
```

```
#pragma omp ordered  
    structured block
```


OpenMP Library Functions

- In addition to directives, OpenMP also supports a number of functions that allow a programmer to control the execution of threaded programs.

```
/* thread and processor count */  
void omp_set_num_threads (int  
    num_threads);  
int  omp_get_num_threads ();  
int  omp_get_max_threads ();  
int  omp_get_thread_num ();  
int  omp_get_num_procs ();  
int  omp_in_parallel();
```

OpenMP Library Functions

```
/* controlling and monitoring thread creation */
void omp_set_dynamic (int dynamic_threads);
int omp_get_dynamic ();
void omp_set_nested (int nested);
int omp_get_nested ();
/* mutual exclusion */
void omp_init_lock (omp_lock_t *lock);
void omp_destroy_lock (omp_lock_t *lock);
void omp_set_lock (omp_lock_t *lock);
void omp_unset_lock (omp_lock_t *lock);
int omp_test_lock (omp_lock_t *lock);
```

- In addition, all lock routines also have a nested lock counterpart
- for recursive mutexes.

Environment Variables in OpenMP

- `OMP_NUM_THREADS`: This environment variable specifies the default number of threads created upon entering a parallel region.
- `OMP_SET_DYNAMIC`: Determines if the number of threads can be dynamically changed.
- `OMP_NESTED`: Turns on nested parallelism.
- `OMP_SCHEDULE`: Scheduling of for-loops if the clause specifies runtime

Explicit Threads versus Directive Based Programming

- Directives layered on top of threads facilitate a variety of thread-related tasks.
- A programmer is rid of the tasks of initializing attributes objects, setting up arguments to threads, partitioning iteration spaces, etc.
- There are some drawbacks to using directives as well.
- An artifact of explicit threading is that data exchange is more apparent. This helps in alleviating some of the overheads from data movement, false sharing, and contention.
- Explicit threading also provides a richer API in the form of condition waits, locks of different types, and increased flexibility for building composite synchronization operations.
- Finally, since explicit threading is used more widely than OpenMP, tools and support for Pthreads programs are easier to find.